

2016



EASTON[®]

ADVANCING ARCHERY'S LEGACY



★
Rio de Janeiro

Advancing Archery's Legacy

"Our mission is to maximize the archer's confidence and experience by providing superior products and services."

Easton's legacy of innovation started with our founder Doug Easton in the 1920's. Doug was obsessed with making arrows as consistent and strong as possible—leading to the first successful aluminum arrows. That legacy was advanced by his son Jim in the 1960's. Jim's obsession is the pursuit of refinement and pushing the technical possibilities—which yielded the first Aluminum-Carbon arrows. Today that legacy is carried on by Jim's son Greg, who continues to push the envelope with innovation, precision, and the pursuit of perfection.

It's also a legacy of winning. Every Olympic gold medal won by an individual man since the sport's return to the modern Olympic Games in 1972 was won with an Easton aluminum or carbon shaft.

From John Williams and Darrell Pace in the 70's, to Oh Jin Hyek in 2012, Easton shafts are the choice of winners. The reason is simple; our legacy of an uncompromising effort to achieve perfection—shaft to shaft tolerances that set—and broke—the standards.

Precision designs that simply work—every time. Dedication to your confidence and success—that is the true Easton legacy as we near our second century.

DOUG EASTON, FOUNDER



OH, JIN HYEK KOR

X10®

The Most-Winning Recurve Arrow Ever.


SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range	
					Grains per Inch	Deflection in Inches
1000	5.3	1.000	28	No limit	90-110	
900	5.8	0.900	28	No limit	90-110	
830	6.2	0.830	28 $\frac{1}{2}$	No limit	90-110	
750	6.4	0.750	29	3.5	100-110	
700	6.7	0.700	29	3.5	100-110	
650	6.8	0.650	29	3.5	100-110	
600	7.0	0.600	30	4.5	100-110	
550	7.5	0.550	31	3.5	100-120	
500	7.8	0.500	32	4.0	100-120	
450	8.1	0.450	33 $\frac{1}{2}$	5.5	100-120	
410	8.5	0.410	33 $\frac{3}{4}$	5.5	100-120	
380	8.9	0.380	33 $\frac{3}{4}$	6.5	100-120	
350	8.8	0.350	34	6.0	100-120	
325	9.2	0.325	34 $\frac{1}{4}$	6.0	100-120	

1 Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Recommended that no more than these lengths be cut from the front of the shaft.

INSERTS AND POINTS

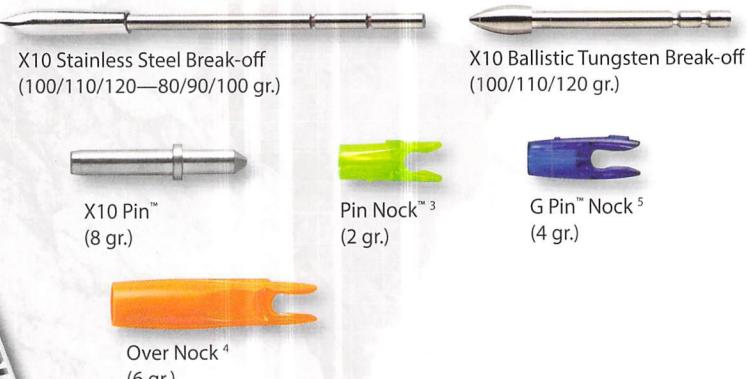

Detailed Component Specifications pp. 24


X10®

- ♦ High modulus carbon fiber bonded to a precision 7075 aerospace alloy core tube
- ♦ Polished Carbon Finish
- ♦ Guaranteed Straightness: $\pm .0015"$
- ♦ Weight modulus: ± 0.5 grains
- ♦ Components—sold separately
- ♦ Barreled Design

BRADY ELLISON USA


EASTON®

INSERTS AND POINTS

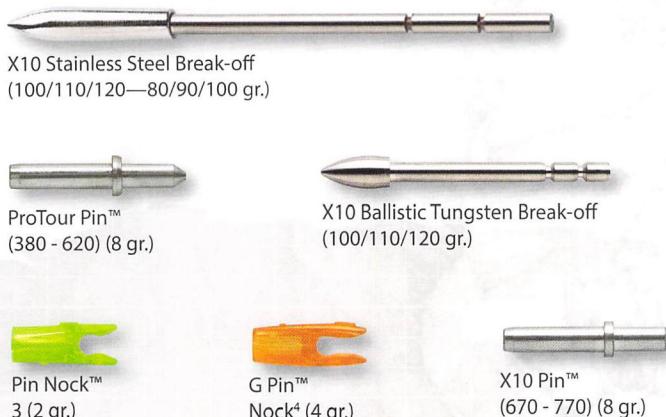

X10 PROTOUR

- ♦ High-modulus carbon fiber bonded to a 7075 alloy core
- ♦ 9-micron polished carbon finish
- ♦ Guaranteed straightness $\pm .0015"$
- ♦ Weight tolerance: ± 0.5 grains
- ♦ Components—sold separately
- ♦ Tapered Design

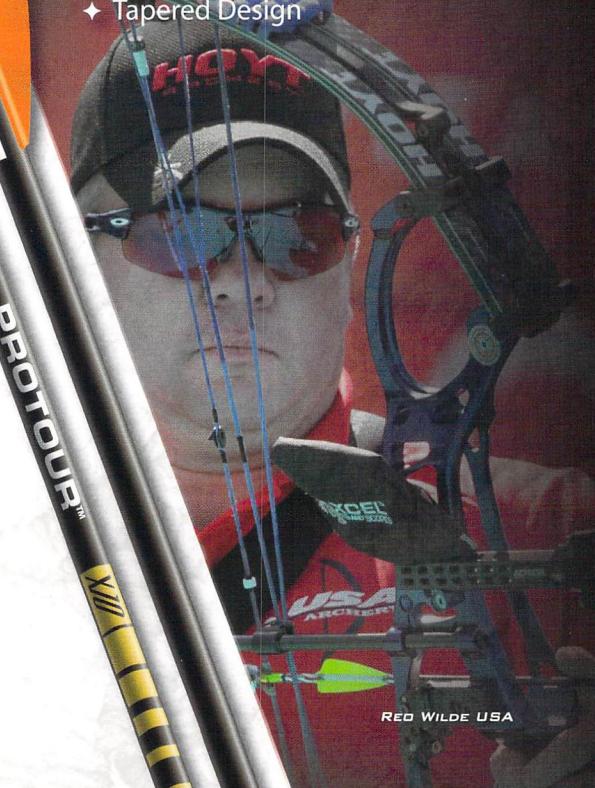

SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range	
					Grains per Inch	Deflection in Inches
770	6.0	0.770	29	No limit	90-110	
720	6.2	0.720	29 $\frac{1}{2}$	No limit	90-110	
670	6.5	0.670	29 $\frac{3}{4}$	4.0	100-110	
620	6.7	0.620	30	4.5	100-110	
570	6.9	0.570	31	5.0	100-120	
520	7.3	0.520	32	5.5	100-120	
470	7.6	0.470	33 $\frac{1}{4}$	6.0	100-120	
420	8.0	0.420	33 $\frac{3}{4}$	6.5	100-120	
380	8.4	0.380	34	7.0	100-120	

1 Due to the taper design of the X10 Pro Tour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Recommended that no more than these lengths be cut from the front of the shaft.

The Most-Winning Compound Arrow Ever.

MADE IN USA

X10 PROTOUR™

**The Arrow that Started it All.
Lighter, Faster, More Precise.**

SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim mount ³	Recommended Point
					Weight Range
1250 ²	5.1	1.250	26 ^{5/8}	No limit	60-70
1100 ²	5.1	1.100	28 ^{1/8}	No limit	70-80
1000	5.7	1.000	28 ^{1/8}	No limit	70-80
920	5.8	0.920	28 ^{5/8}	9.5	70-80
850	5.7	0.850	28 ^{5/8}	No limit	70-80
780	6.0	0.780	29 ^{1/8}	No limit	80-90
720	6.4	0.720	29 ^{5/8}	6.0	80-90
670	5.9	0.670	30 ^{1/8}	No limit	80-90
620	6.1	0.620	30 ^{5/8}	No limit	90-100
570	6.3	0.570	31 ^{5/8}	10.0	90-100
520	6.7	0.520	31 ^{5/8}	4.5	90-100
470	6.8	0.470	32 ^{1/8}	6.5	90-110
430	7.0	0.430	32 ^{5/8}	5.5	100-120
400	7.5	0.400	32 ^{5/8}	4.0	100-120
370	7.9	0.370	32 ^{1/8}	4.0	110-120

1 Due to the barrel design of the A/C/E, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 5-6 grains.

2 Available as a special order only. Replaced with A/C/C -00 sizes.

3 Recommended that no more than these lengths be cut from the front of the shaft.

INSERTS AND POINTS



MADE IN USA

A/C/E®

- High-modulus carbon fiber bonded to a 7075 alloy core
- Guaranteed straightness $\pm .0015"$
- Weight tolerance: ± 0.5 grains
- Components—sold separately
- Barreled Design

EASTON

INSERTS AND POINTS



A/C/E Stainless Steel Break-off Point:
(60/70/80—80/90/100—100/110/120 gr.)



A/C/E Insert
(39, 49, 59 gr.)



Screw-in Point
(31, 36, 41, 46, 51 gr.)



One-piece Point
(50 gr.)



A/C/E Pin
(8 gr.)



Pin Nock™
(2 gr.)



G Pin™ Nock⁶
(4 gr.)



G Nock™⁵
(7 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Recommended Point
				Weight Range
1500	4.7	1.500	28	50-70
1300	5.1	1.300	28 ^{1/2}	50-70
1150	5.5	1.150	28 ^{1/2}	50-70
1000	5.5	1.000	29	70-80
880	5.9	0.880	29 ^{1/2}	70-80
810	6.1	0.810	30	80-90
710	6.5	0.710	30 ^{1/2}	80-90
660	6.9	0.660	30 ^{3/4}	80-90
610	7.3	0.610	31	80-90
540 ¹	7.7	0.540	31 ^{1/2}	100
480 ¹	8.4	0.480	32	100-110
430 ¹	8.9	0.430	32 ^{1/2}	100-110

430, 480, 540 sizes use unique A/C/G point and nock pins. All others use A/C/E points and nock pins.

A/C/E® Insert and Point System 5-44 Thread

A/C/E Insert	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.
Screw-in Point					
H - 39gr.	70	75	80	85	90
J - 49gr.	80	85	90	95	100
L - 59gr.	90	95	100	105	110

Total Weight (grains)—Insert and Point

**Precision Performance & Value
in One Do-it-all Arrow.**

MADE IN USA

A/C/G™

A/C/G™

- Lightweight carbon fiber bonded to a 7075 alloy core
- Guaranteed straightness $\pm .002"$
- Weight tolerance: ± 1.0 grains
- Components—sold separately
- Parallel Design

SARA LOPEZ COL

877-INFO-EASTON

EASTON®
A/C/G™

MADE IN USA

A/C/C™

**The Arrow for Everything
with a Size for Everyone.**

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point/Insert Sizes	UNI ¹ System			One-Piece Parabolic Point			NIBB Point	RPS Inserts ⁴
					Bushing	G Nock ²	Heavy Wt.	Med. Wt.	Light Wt.	Extra Light Wt.		
		Grains per Inch	Deflection in Inches	In.	Gr.	Gr.	Gr.	Gr.	Gr.	Gr.	Gr.	Gr.
2-00	4.7	1.500	28	-00*	—	7	—*	50*	—*	—*	—*	—
3L-00	5.1	1.300	28½	-00*	—	7	—*	50*	—*	—*	—*	—
3-00	5.5	1.150	28½	-00*	—	7	—*	—*	50*	—*	—*	—
2L-04	6.1	1.020	29	-04	2	7	100	80	70	60	50	—
2-04	6.5	0.920	29½	-04	2	7	100	80	70	60	50	—
3X-04	6.7	0.830	29½	-04	2	7	100	80	70	60	50	—
3L-04	7.0	0.750	30	-04	2	7	100	80	70	60	50	—
3-04	7.2	0.680	30	-04	2	7	100	80	70	60	50	—
3L-18	7.5	0.620	31	-18	3	7	—	100	82	70	60	70
												17/64
3-18	7.8	0.560	31	-18	3	7	—	100	82	70	60	70
3-28	8.1	0.500	31½	-28	4	7	—	100	87	70	60	70
3-39	8.6	0.440	31½	-39	5	7	—	100	85	70	60	70
3-49	8.8	0.390	32	-49	6	7	—	—	100	80	70	80
3-60	9.5	0.340	32½	-60	7	7	—	—	108	90	80	90
3-71	9.9	0.300	33	-71	8	7	—	—	114	90	80	90
												14
												516

1 UNI—Universal Nock Installation System.

2 G Nock available in black, white, green, blue, deep red, orange, red, and comes in .088" and .098" string groove sizes.

3 NIBB Point grain weights are ± 0.5 grains; all other components are ± 1 grain.

4 RPS=Replaceable Point System.

5 RPS target points available in 50-125 grains.

— Indicates not available.

* A/C/C-00 sizes use the same size core tube as A/C/E shafts and may use all A/C/E points, inserts, and nocks.

INSERTS AND POINTS



A/C/C NIBB Point



A/C/C One-piece Parabolic Point



8-32 Half-out Threaded Insert



RPS Threaded Point



G Nock™ (7 gr.)



UNI Bushing®



RPS Threaded Insert

MADE IN USA

A/C/C™

- ♦ High-strength carbon fiber bonded to a precision 7075 alloy core tube
- ♦ Polished carbon finish
- ♦ Guaranteed straightness: $\pm .002"$
- ♦ Weight tolerance: ± 0.5 grains
- ♦ Components—sold separately
- ♦ Parallel Design

INSERTS AND POINTS



Carbon One Stainless Steel Break-off
(70/80/90—90/100/110 gr.—100/110/120 gr.)



Carbon One-#1 Pin
(550-730)
(9 gr.)



Carbon One-#2 Pin
(500-410)
(9 gr.)




Pin Nock™
(2 gr.)



A/C/E Pin™
(810-1150)
(9 gr.)



G Pin™ Nock
(4 gr.)



G Nock™
(7 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point	Recommended Point Weight	Nock Pin Adapter	Nock
					Grains per Inch	Deflection in Inches	
1150	5.0	1.150	28 1/8	—	70-80	—	—
1000	5.0	1.000	28 3/8	Carbon One	70-80	—	—
900	5.3	.900	28 3/4	90/80/70	80-90	A/C/E	Pin Nock G Pin Nock G Nock
810	5.8	.810	29 1/8	—	80-90	—	—
730	6.0	.730	29 3/4	—	90-100	—	—
660	6.6	.660	30 3/8	Carbon One	90-100	Carbon One-1	Pin Nock G Pin Nock G Nock
600	6.9	.600	30 3/4	110/100/90	100-110	—	—
550	6.9	.550	31 3/32	—	100-110	—	—
500	7.4	.500	31 1/2	—	110-120	Carbon One-2	Pin Nock G Pin Nock G Nock
450	8.1	.450	31 7/8	Carbon One	110-120	—	—
410	8.5	.410	32 3/32	120/110/100	110-120	—	—

Affordable All Carbon Precision.

MADE IN USA

EASTON®

CARBON ONE™

- ♦ High-strength carbon fibers
- ♦ Micro-smooth finish
- ♦ Straightness: $\pm .003"$
- ♦ Weight tolerance: ± 1 grain
- ♦ Components—sold separately
- ♦ Also uses A/C/E components
- ♦ Parallel Design

SEBASTIEN PEINEAU FRA

CARBON ONE™

APOLO™

Beginner to Experienced Short-Draw Shooters—Here's Your Arrow.

SPECIFICATIONS

Size	Shaft Weight	Spine	Stock Length	Recommended Point Size	Nock Pin Adapter	Nock
1200	5.5	1.200	27.5	Apollo 1-Piece 50 Grain	A/C/E	Pin Nock G Pin Nock G Nock
1070	5.9	1.070	28			
950	6.2	0.950	28.5			
840	6.5	0.840	29	Apollo 1-Piece 75 Grain	Carbon One - 1	Pin Nock G Pin Nock G Nock
740	7.2	0.740	29.5			
670	7.7	0.670	30			
610	8.1	0.610	30.5	Apollo 1-Piece 100 Grain	Carbon One - 2	Pin Nock G Pin Nock G Nock
560	8.4	0.560	31			

INSERTS AND POINTS



MADE IN USA

APOLO™

- ♦ Micro-smooth finish
- ♦ Guaranteed straightness: $\pm .005"$
- ♦ Weight tolerance: ± 2.0 grain
- ♦ Components—sold separately
- ♦ Parallel Design

EASTON


EASTON

INSPIRE™

- ♦ Small-diameter, micro-smooth carbon finish
- ♦ Available in seven sizes
- ♦ Zinc one-piece points
- ♦ Parallel Design

RICK VAN DER VEN NED

INSERTS AND POINTS

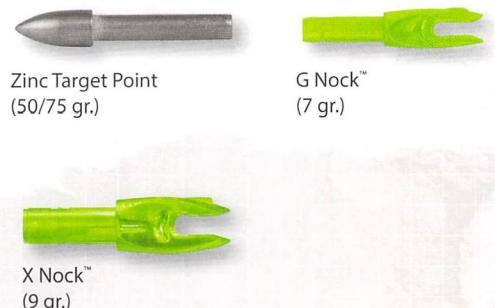

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Glue-In Point	Nock
1400	6.7	1,400	27	50	G
1200	7.2	1,200	27 $\frac{1}{4}$	50	G
1000	7.2	1,000	27 $\frac{1}{2}$	50	G
900	7.7	0,900	28 $\frac{1}{2}$	50	G
750	8.1	0,750	29 $\frac{1}{2}$	50	G
630	7.9	0,630	30 $\frac{1}{2}$	75	X
570	8.2	0,570	31 $\frac{1}{2}$	75	X

**The Right Start
at the Right Price.**

MADE IN USA

INSPIRE™



TRIUMPH™

**The Pinnacle of Indoor
Carbon Technology—
Max Diameter & Precision.**

SPECIFICATIONS

Size	Shaft Weight @ 28"	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	One-piece Point
Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains
500	279	0.500	30 $\frac{1}{4}$	13	8	12	7	16	100/125/150/175/200
450	290	0.450	30 $\frac{1}{4}$	13	8	12	7	16	100/125/150/175/200
400	298	0.400	31 $\frac{1}{4}$	13	8	11	7	15	100/125/150/175/200
350	312	0.350	31 $\frac{1}{4}$	13	8	11	7	15	100/125/150/175/200

Triumph is World Archery Maximum Diameter Compliant in all Sizes.

INSERTS AND POINTS



TRIUMPH™

- ♦ All four sizes made to max World Archery 9.3mm O.D.
- ♦ Built-in 7% F.O.C.
- ♦ Front reinforcement for durability
- ♦ Multi-layer carbon fiber and 7075 alloy
- ♦ Straightness $\pm .002"$
- ♦ Weight tolerance: ± 1.0 grain
- ♦ Super or G UNI bushings—sold separately
- ♦ Components—sold separately

EASTON

INSERTS AND POINTS



SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	FatBoy RPS Insert	One-piece Point	RPS Point ²
Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains	Grains	O.D. Inches
500	7.1	0.500	31 $\frac{1}{2}$	13	8	9	7	13	40	80/100	11 $\frac{1}{32}$
400	7.8	0.400	32	13	8	9	7	13	40	80/100	11 $\frac{1}{32}$
340	8.3	0.340	33 $\frac{1}{4}$	13	8	9	7	13	40	80/100	11 $\frac{1}{32}$

1 Super or G-UNI Bushing factory installed.
2 RPS screw-in points available in 50-125 grains.

FatBoy meets the maximum diameter restriction for World Archery Tournaments.

A Proven Winner. Easy Tuning & High Performance.

FATBOY™

FATBOY™

- ♦ Specifically engineered for indoor and 3D
- ♦ 23/64" (9.3mm) outside diameter
- ♦ Multi-layer wrapped carbon fibers
- ♦ Smooth matte black finish
- ♦ Straightness: $\pm .003"$
- ♦ Weight tolerance: ± 2.0 grains
- ♦ Super or G-UNI bushings installed
- ♦ Inserts, points and nocks
— sold separately



PETER ELZINGA NED

X²3™ & X²7™

The Highest Precision & Tightest Tolerance. Period.

SPECIFICATIONS

Model	Shaft Size	Shaft Weight	Spine @ 28" Span	Stock Length	UNI Bushing	Super Nock	RPS Insert	One-Piece Point	RPS Point
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains		O.D. Inches
X ² 3	2312	9.5	0.423	33	11	13	37	100	11/32
X ² 3	2314	10.8	0.391	33.5	10	13	34	100	11/32
X ² 3	2315	11.8	0.340	34	11	13	37	100	11/32
X ² 7	2712	11.3	0.260	34.5	19	13	—	150/300	—

INSERTS AND POINTS



One-piece Point
(150/300 gr.)



Super UNI Bushing*
(19 gr.)



Super Nock*
(13 gr.)



MicroLite™ Super Nock*
(8 gr.)



3D Super Nock*
(13 gr.)

X²3™ & X²7™

- ♦ 7178-T9 aerospace alloy diamond polished anodized silver finish
- ♦ Guaranteed straightness: $\pm .001"$
- ♦ Weight tolerance: $\pm 3/4%$
- ♦ Strength (PSI): 105,000
- ♦ Components—sold separately

MADE IN USA

EASTON

INSERTS AND POINTS



NIBB Point



One-piece Point



RPS Point



RPS Insert



G-UNI Bushing*
(for sizes 1914 and smaller)



Super UNI Bushing*



G Nock*
(for sizes 1914 and smaller)
(7 gr.)



3D Super Nock*
(13 gr.)



MicroLite™ Super Nock*
(8 gr.)

SIZES

1514, 1614, 1714, 1814, 1914, 2014, 2112, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2413, 2511, 2512, 2613, 2712

• G-UNI or Super UNI Bushing—installed • Nocks and points—sold separately

Perfect Precision. Precise Tuning. There's an Eclipse for Every Competitor.

MADE IN USA

X⁷ ECLIPSE™

EASTON

X⁷ ECLIPSE™

- ♦ 7178-T9 aerospace alloy
- ♦ Hard-anodized black finish
- ♦ Guaranteed straightness: $\pm .001"$
- ♦ Weight tolerance: $\pm 3/4%$
- ♦ Strength (psi): 105,000

MIKE SCHLOESSER NED



ECLIPSE

SUPERDRIVE™

**No Need to Pull a Ring
When You're in the Middle.**

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Super Nock	MicroLite Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	Pin Nock Adapter	One-piece Point
Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains	Grains
290	7.8	0.290	32	13	8	16	7	18	15	100/125

INSERTS AND POINTS



SUPERDRIVE™

- ♦ Straightness: $\pm .002"$
- ♦ Weight tolerance: ± 1.0 grain
- ♦ $25/64"$ outside diameter
- ♦ Specifically engineered for indoor and 3D
- ♦ Black, smooth matte finish
- ♦ Multi-layer wrapped carbon fiber
- ♦ Super or G UNI bushings—*included*
- ♦ Inserts, points, and nocks — *sold separately*
- ♦ Pin Adapter—*sold separately*

EASTON

INSERTS AND POINTS



Full Bore One-piece Point
(100/150/200 gr.) for 350 spine
(100/200/250 gr.) for 270 spine



Super UNI Bushing®
(19 gr.)



G-UNI Bushing®
(21 gr.)



MicroLite™ Super Nock®
(8 gr.)



G Nock™
(7 gr.)



Super Nock®
(13 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Super Nock	MicroLite Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	One-piece Point
Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains
350	8.4	0.350	32	13	8	19	7	21	100/150/200
270	9.0	0.270	32.125	13	8	19	7	21	100/200/250

**Speed AND Precision.
You Can Have Both.**

FULL BORE™

EASTON

FULL BORE™

- ♦ Straightness: $\pm .003"$
- ♦ Weight tolerance: ± 2.0 grains
- ♦ $27/64"$ outside diameter
- ♦ Specifically engineered for indoor and 3D
- ♦ Black, smooth matte finish
- ♦ Multi-layer wrapped carbon fibers
- ♦ Super or G UNI bushings — *included*
- ♦ Inserts, points, and nocks — *sold separately*

XX75® GENESIS™

 EASTON®

**The Most Popular
Beginner Arrow in the World.**

INSERTS AND POINTS

Available in: blue, green, orange, purple



One-piece Point

Size : 1820



G-UNI Bushing*



N Nock™
(7 gr.)



National Archery in the Schools Program

XX75® GENESIS™

- ♦ 7075 aerospace alloy
- ♦ Hard-anodized
- ♦ Guaranteed straightness: $\pm .005"$
- ♦ Weight tolerance: $\pm 2.5\%$
- ♦ Strength (psi): 90,000
- ♦ UNI bushing—installed

 EASTON®

Genesis is a trademark of Genesis Archery

MADE IN USA

INSERTS AND POINTS



CB Point



G-UNI Bushing*



RPS Threaded Point



CB Threaded Insert



G Nock™
(7 gr.)

SPECIFICATIONS

Size	Shaft Weight Grains per Inch	Shaft Weight @ 29" Grains	Spine @ 28" Span Deflection in Inches	Stock Length Inches	UNI Bushing ¹ Grains	G Nock Grains	CB Insert Grains	CB Point ² Grains	RPS Point O.D. Inches
500	6.5	189	0.500	31½	12	7	21	80/100	932
400	7.4	215	0.400	32	12	7	21	80/100	932
340	8.2	238	0.340	32½	12	7	21	80/100	516

1 G-UNI Bushing factory installed.
2 RPS screw-in points, available in 50-125 grains.

Note: one-size CB Insert and CB Point fits all LightSpeed shaft sizes.

The Ultimate in Precision Speed.

LIGHTSPEED™

LIGHTSPEED™

- ♦ Multi-layer wrapped carbon fibers
- ♦ Smooth matte black finish
- ♦ 3D straightness: $\pm .001"$
- ♦ LightSpeed straightness: $\pm .003"$
- ♦ Weight tolerance: ± 2.0 grains
- ♦ G-UNI Bushing—installed
- ♦ Point—sold separately
- ♦ G Nock—sold separately



XX75™ PLATINUM® PLUS

Economical, Accurate, and Durable.

- ◆ 7075-T9 aerospace alloy
- ◆ Hard-anodized finish
- ◆ Guaranteed straightness: $\pm .002"$
- ◆ Weight tolerance: $\pm 1\%$
- ◆ Strength (psi): 96,000

INSERTS AND POINTS



SIZES

Sizes: 1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315

- G-UNI or Super UNI Bushing—installed
- Nocks and points—sold separately

MADE IN USA

NEOS™

TRIBUTE™

XX75™ JAZZ™

XX75® PLATINUM™ PLUS

EASTON

XX75™ JAZZ™

Value Priced Precision Aluminum.

- ◆ 7075 aerospace alloy
- ◆ Hard-anodized finish
- ◆ Guaranteed straightness: $\pm .005"$
- ◆ Weight tolerance: $\pm 2\%$
- ◆ Strength (psi): 90,000
- ◆ Precision-ground nock swage

INSERTS AND POINTS



SIZES

Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

- Components—sold separately
- 1214 size uses the direct-fit G Nock

MADE IN USA

TRIBUTE™

High performance for any beginning or shorter-draw, lighter poundage archer.

- ◆ 7075 aerospace alloy
- ◆ Hard-anodized black finish
- ◆ Guaranteed straightness: $\pm .005"$
- ◆ Weight tolerance: $\pm 2\%$
- ◆ Strength (psi): 90,000
- ◆ Precision-ground nock swage

INSERTS AND POINTS



SIZES

Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

- Components—sold separately
- 1214 size uses the direct-fit G Nock

MADE IN USA

NEOS™

The ideal spine for leisure and beginner archers, shooting lighter-weight bows.

- ◆ 7075 aerospace alloy
- ◆ Hard-anodized gold
- ◆ Guaranteed straightness: $\pm .008"$
- ◆ Weight tolerance: $\pm 5\%$
- ◆ Precision-ground nock swage

INSERTS AND POINTS



SIZES

Sizes: 1618

- Components—sold separately

MADE IN USA



BEGINNER BOWS

The Easton beginner bow is the perfect set up to get you started shooting archery. Easton has been building archery equipment since 1922, and that experience is built into a high quality recurve bow for long-lasting fun. The bow features a lightweight, slim, polymer technology riser and durable glass-reinforced limbs. At only 1.3 lbs., the Easton recurve is easy to handle and the ideal starter set up for any aspiring archer. With a smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous design for either right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Available in bow only and kit configurations
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard

Kit colors: Black, Pink, and Camo

**XX75 BULK PACK**

- Colors: pink and black

**SCOUT 2™**

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed

**ARCHERY COMBO PACK**

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high strength 28" arrows
- High strength 7075 aerospace-grade alloy
- Comfort-flex finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and Pink

**XX75®**

- 7075 aerospace alloy
- Guaranteed straightness: $\pm .005$
- Weight tolerance: $\pm 2.5\%$
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock

**BEGINNER FINGER TAB**

- Ambidextrous design works well for right and left handed archers



NEW CONTOUR™ HUNTER

uses our proven Tri-Mod carbon technology to tame vibration while balancing the bow for better aim and shot execution. The go-to choice for both bowhunters and bowhunter limited class competitors. Contour Hunter is the most advanced stabilizer we've ever developed for the modern bowhunter. Available in Black, Realtree Max 1™, and Realtree Xtra™.


CONTOUR Hunter		
Size	8 in-21 cm	11 in-28 cm
Ounces	2.3	2.7
Grams	65	76



EASTON
ULTRA-HIGH MODULUS CARBON

NEW PRO-LINK™ EXTENDER

The podium-proven Easton Pro-Link stabilizer extension is reinforced with a full-length Internal Stainless Steel Reinforcement Beam. This super-strong beam links the precision internal-bonded ferrules at each end to create a torque-resistant system capable of handling heavy loading, abusive v-bar torquing, and the stress of high-energy bows. The Internal Stainless Steel Beam of Pro-Link Extension has been tested and proven at the highest levels of competition by some of the best archers on the planet. Pro-Link is also the stiffest extension we've ever made. The precision-made Pro-Link extension is ideally matched to the Easton Contour and Z-Flex system stabilizers, and is fully compatible with most other ATA compliant stabilizer systems with 5/16-24 threads.

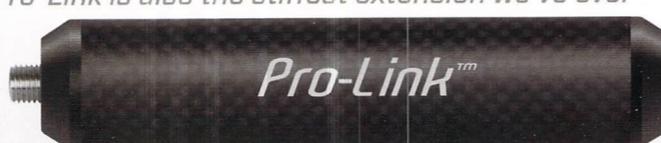

PROLINK Extender			
Size	6 in-15 cm	5 in - 13 cm	4 in - 10 cm
Ounces	4.64	4.32	4.00
Grams	131.5	122.5	113.4

EASTON



NEW CONTOUR CS™

features the most extreme stiffness to weight ratio we have ever developed for a stabilizer. Featuring aerospace-grade graphite fiber, the Contour CS is optimized for shooters looking for the stiffest possible stabilizer with superior hold and a wind-cheating slim profile for rock-solid aiming. Contour CS—the most advanced stabilizer ever, from the company that pioneered carbon stabilizers—Easton.

EVIDON TRI-MOD CARBON

Contour CS

WINDCUTTER 360°

CONTOUR CS Stabilizer

Size	27 in-69 cm	30 in - 76 cm	33 in - 84 cm
Ounces	4.0	4.3	4.5
Grams	115	122	128

CONTOUR™

Proven performance Contour stabilizer uses a complex carbon fiber construction to damp out post-shot vibration while providing an unmatched aiming experience, even in crosswinds. The Windcutter-360™ design of Contour promotes a steady confidence in crosswinds while the large-diameter base promotes enhanced vibration reduction with no need for rubber decouplers. Choose the super-light, original Contour for a slightly softer feel on follow-through. Light and efficient, Contour is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari-weights for competitors seeking the most compact setup.



CONTOUR Target Stabilizers			CONTOUR Side Rod				
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9
Grams	106	114	123	131	71	75	83



WINDCUTTER 360°

Z FLEX™

provides extreme stiffness and high-moment weight system compatibility with minimum aiming float. AVRS™ chamber for rapid vibration amplitude dissipation after the shot. Z-Flex is compatible with 5/16"-24 flat vari-weights.




Size	Z-FLEX Stabilizer			Z-FLEX Side Rod			
	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in - 84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9
Grams	164	175	186	196	92	99	111

- Ultra-stiff design for steady aiming
- AVRS damping for active-shock management
- Lowest mass and highest efficiency

A/C™ PRO

Easton's technologically advanced A/C Pro stabilizers are among the most efficient stabilizers ever developed. Featuring the incredible stiffness of high-modulus carbon fiber and the high-frequency response preferred by top archers across the globe, the Ultra-High Resonance A/C Pro stabilizer is equipped with the proven, low-mass AVRS system. From Olympic and World Championship podiums to the top of the local league leader board, A/C Pro is proven across the globe. A/C Pro is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari weights.

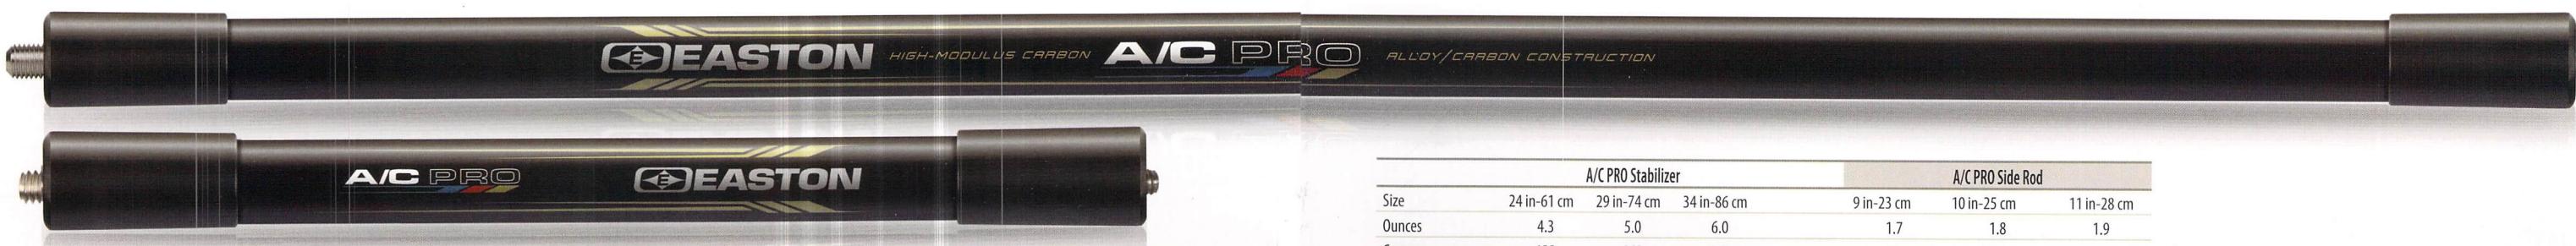

Size	A/C PRO Stabilizer			A/C PRO Side Rod		
	24 in-61 cm	29 in-74 cm	34 in-86 cm	9 in-23 cm	10 in-25 cm	11 in-28 cm
Ounces	4.3	5.0	6.0	1.7	1.8	1.9
Grams	122	142	170	48	51	54

- Proven A/C Construction
- AVRS Damping System for Shock Management
- Stiff Design for Steady Aiming




Both Contour and Z Flex Stabilizers come with a reusable protective sleeve

MOUNTS


FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included

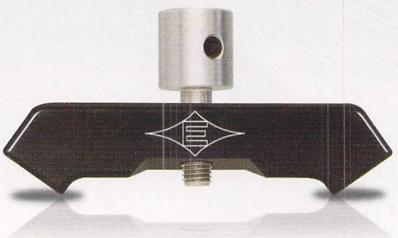

CONTOUR AND Z-FLEX CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down

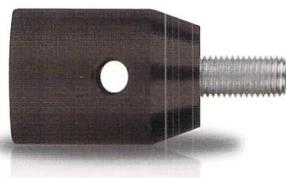


VARI-WEIGHTS



ORIGINAL VARI-WEIGHTS 1/4-20 THREAD

Ounces	Grams
Module	1.5
1/2 Module	0.75v
Cap	1.5

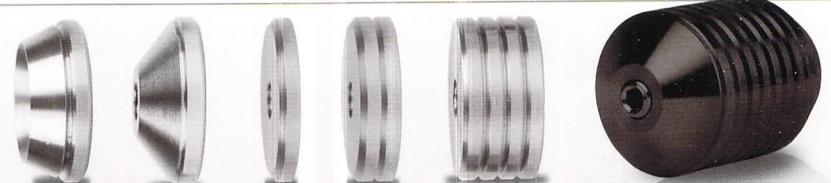

FLAT VARI-WEIGHTS 5/16-24 THREAD*

	Ounces	Grams
Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114

*Mix and match any combination of Flat Weights for custom balance, aiming, and aesthetics.

ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel bolt included




QUICK DISCONNECT BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down
- Available in 0° and 10°



In the spirit of the man who shaped modern archery.
Doug Easton's legacy of innovative genius continues
today in the full line of "Dr. Doug's" products.

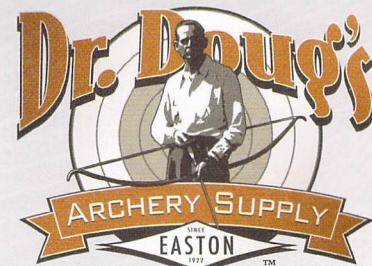

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz. and 1.0 FL oz.



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz. and 1.0 FL oz.



FASTSET™ VANE GEL

- Sizes: 3 gram and 9 gram



24-HOUR INSERT EPOXY SYRINGE

- Provides a permanent bond
- Flexible, non-brittle formula




DR. DOUG'S™ 3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner—removes dirt, wax & contaminants from bowstring
- Bowstring Revitalizer—restores color & penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



QUICKBOND™ ARROW BUILDING & REPAIR KIT

- Complete vane and insert adhesive kit—enough for a dozen arrows.
- Orange—Quickbond Insert Glue
- Clear—Quickbond Vane Adhesive
- Red—VC-3 Threadlocker
- Low Temperature Hot-melt Stick



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick



VC3® THREAD LOCKER

- Unique reusable formula.
- Apply to broadheads, practice points, & bow accessories for solid mounting and reduced vibration.

VC-3 is a registered trademark of ND Industries, Inc.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes




FLETCH-TITE® PLATINUM

- Size: 22-gram tube

Fletch-Tite® is a registered trademark of Bohning Company LTD



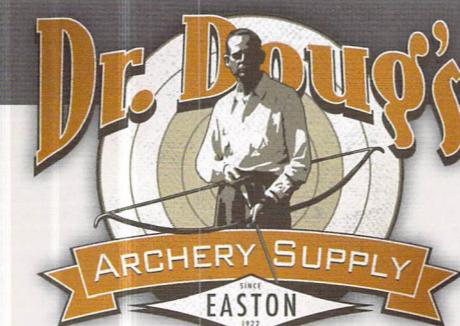

(A) DR. DOUG'S™ FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula makes for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



(B) ARROW PULLER WEDGE

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



(C) ARROW PULLER PUCK

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage



(D) PRO HEX FOLD UP SET - STD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



(E) PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



(F) PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16,
- Metric: 1.5, 2.5, 3.0, and 2.8 flat blade



(H) PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes: 7/32, 3/16, 1/4




(I) PRO ARCHERY NEEDLE NOSE PLIERS

- A must for any serious bow mechanic




(J) ELITE NOCK AND D-LOOP PLIERS

- Convenient and versatile archery tool
- Patent-pending dual-jaw design
- Maximizes mechanical advantage for tightest possible D-loops
- Six tools in one

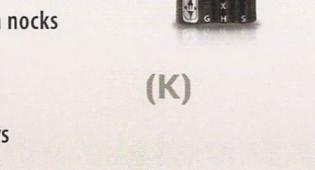

(K) UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



(L) BROADHEAD WRENCH

- For safe installation & removal of broadheads from arrows

(M) PRO SHOP TOWELS

- Durable and disposable lint-free towel especially suited for preparing arrow shafts for fletching and point installation

(N) BOW STRINGER

- Molded rubber-cupped stringer for easy and recommended stringing of target recurve bow

(O) BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep sights.
- Includes 1m red thread & 1m black thread

(P) BCY POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75 yard spool

(Q) BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- 1m length

BCY is a trademark of BCY Bowstring.



ARCHERY ESSENTIALS 12-PIECE PRO SHOP TOOL KIT (T), 8-PIECE VALUE PACK (U), AND 6-PIECE CROSSBOW ESSENTIALS KIT (V)

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12-Piece Kit Adds:

- D-Loop Pliers
- Bow Square- L Model
- Small Folding Allen Wrench Set
- Arrow Prep Tool Kit

6-Piece Crossbow Kit includes:

- Small Folding Allen Wrench Set
- Zippered Cube Case
- Rail Lube Wax
- Wedge Arrow Puller
- Broadhead Wrench
- Scope Lens Cleaner Cloth

BTV™ CROSSBOW VANES

- Height and profile designed specifically for high-powered crossbows
- Stiffening ridge cuts flutter at high speeds
- Increases accuracy and tightens broadhead groups



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging	
300	3.00	.500	10	Bright Green Yellow Red	Fire Orange White	Clamshell or 100-count bag

All weights are within ± 0.5 grain.

Diamond Vanes®



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging	
175	1.750	.375	3	Bright Green	Fire Orange	Clamshell or 100-count bag
235	2.375	.375	4	Sunset Gold	White	
280	2.875	.500	6	Yellow	Black	
380	3.875	.500	8	Hot Pink		

All weights are within ± 0.5 grain.

XPV™ Vanes

High performance for broadhead use



Size	Length (Inches)	Height (Inches)	Weight (Grains ¹)	Colors	Packaging	
200	2.00	.568	6	Bright Green Red Yellow Indigo	Fire Orange Hot Pink White Blue	100-count bag 500-count box

All weights are within ± 0.5 grain.

Tite Flight™ Vanes

Special rib adds stiffness to cut in-flight flutter and noise.

Size	Length (Inches)	Height (Inches)	Weight (Grains ¹)	Shield is 200 Only		
				Colors	Packaging	
175	1.750	.375	3	Bright Green Black Yellow	Fire Orange Hot Pink White	100-count bag
200	2.000	.330	4			

All weights are within ± 0.5 grain.

FEATHERS



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging	
3.0 R	3.000	.400	1.3	Black	Orange	Clamshell or 100-count bag
4.0 R	4.000	.550	2.8	Blue	Red	
5.0 R	5.000	.600	4.5	Brown Yellow FL Green Gray	White Yellow Chartreuse	

All weights are within ± 0.5 grain.

EZ FLETCH™ TOOL NEW

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"



(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"

SPIN WING VANES®



1.75-inch vanes in black, white, blue, red, and yellow



Available in right or left

Packaging - 50-count bag

Colors ● Black ○ White ● Blue ● Red ● Yellow

Spin Wing Vane® is a registered trademark of Range-O-Matic Archery Company

DIAMOND™ SHRINK CRESTS

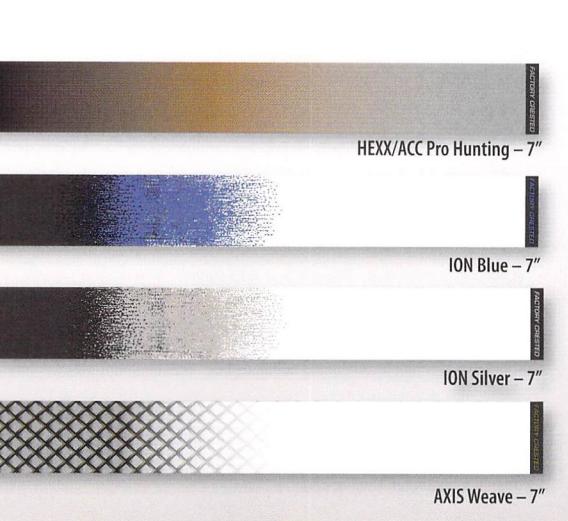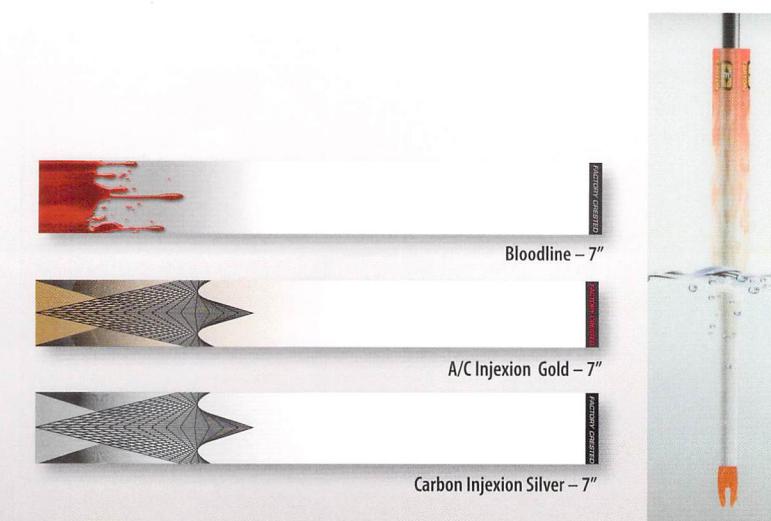

ELITE FIELD QUIVER NEW

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release cobra™ style buckle for secure operation and positive engagement
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Quiver belt included. Release pouch sold separately
- Colors: Red, Blue, Grey, White, and Carbon Black

ELITE QUIVER BELT NEW

- Sizes: One size fits most
- Innovative hook & loop adjustment
- Quick-release cobra™ style buckle

ELITE RELEASE POUCH NEW

- Sizes: One size fits most

ELITE HIP QUIVER NEW

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release cobra™ style buckle for secure operation and positive engagement
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Quiver belt Included. Release pouch sold separately
- Colors: Red, Blue, Grey, White, and Carbon Black



NEW MODULAR SYSTEM CAN ACCOMMODATE
MULTIPLE CONFIGURATIONS:



- Accessory Clip (included)
- Removable Pocket (included)
- Release Pouch (sold separately)

DELUXE FIELD QUIVER NEW

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch and belt sold separately
- Colors: Silver, Green, Red, Blue, Pink, Purple, and Realtree Xtra™

DELUXE QUIVER BELT NEW

- Sizes: One size fits most
- Innovative hook & loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH

- Sizes: One size fits most

DELUXE HIP QUIVER NEW

- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Attached upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch and belt sold separately
- Colors: Silver, Green, Red, Blue, Pink, Purple, and Realtree Xtra™



* All colors available in right and left handed models

FLIPSIDE™ 4-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra™

**FLIPSIDE™ 3-TUBE HIP QUIVER**

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra™

**RANGE LITE™ HIP QUIVER**

- Lightweight design
- Molded shank and arrow separator
- Easy-access pockets
- Top pocket for releases, pens or smart phones
- Available in right or left hand configurations
- Internal pocket dividers
- Colors: Silver, Red, Blue, Pink, and Realtree Xtra™

**REPLACEMENT FLIPSIDE ARROW TUBE****REPLACEMENT BELT CLIP****FLIPSIDE™ 2-TUBE HIP QUIVER**

- Innovative design fits both right and left-hand shooters —for wear on either side
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: Black, Red, Blue, Pink, Purple, Realtree Max-1™, Lost Camo™, and Realtree Xtra™



GENESIS® 4014 BOW CASE

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Pink, Blue, Black and Lost® Camo

**MICRO FLATLINE™ 3617 BOW CASE**


- Modern designed bowcase for maximum protection and space saving compact size
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy grab pulls
- Fits most bows; interior dimensions of 35" x 16"
- Exterior mesh accessory pocket
- Colors: Black, Pink, Realtree Xtra® Realtree Max-1™, and Lost® Camo

**FLATLINE™ 4417 BOW CASE**

- Sleeve-style bow case for maximum protection and space saving compact size.
- Compatible with all Easton arrow tote and arrow case models.
- Premium oversized #10 zippers with easy grab pulls
- Fits most bows and arrow cases; interior dimensions of 43" x 16"
- Two exterior and one interior accessory pockets for release aids, range finders, tools or other archery essentials
- Colors: Black, Realtree Xtra® Realtree Max 1™, and Lost Camo™

**DELUXE 4517 BOW CASE & 4517 LADIES BOWCASE**

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear.
- Compatible with all Easton arrow tote and arrow case models.
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (Case Cubes sold separately)
- Fits most bows — interior dimensions 44" x 16"
- 360° padding for complete bow protection
- Movable bow-anchoring straps for rock-solid bow security
- Elastic arm band with adjustable cord locks
- Colors: Black, Realtree Xtra™, Realtree Max-1®, Lost Camo™, Realtree Max-1™/Lavender

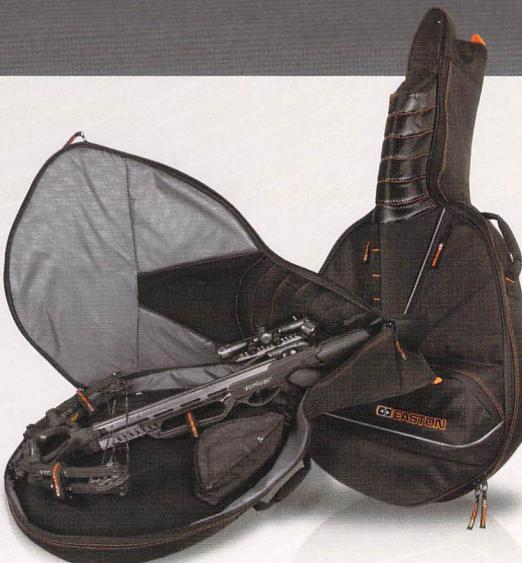**DELUXE 4126 CROSSBOW CASE**

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe Crossbow Arrow Case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection.
- Compatible with both standard and reverse limb crossbows
- Includes one Corner Case Cube pocket
- Inside dimensions 41" x 26"

**DELUXE 3915 & 3615 COMPOUND/RECURVE ROLLER BOW CASE**

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36" L x 15" W x 9" H) and (39" L x 15" W x 9" H)
- Compatible with the Easton Deluxe 33" & 36" Arrow Cases
- Case-cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Airline Travel Cover recommended (sold separately)

**ELITE™ 4717 DOUBLE BOW CASE**

- Two full-size target bow compatible
- Inside dimensions 46" x 16"
- Case-cube compatible double fleece twin main compartment.
- Double or single bow with opposite side clothing storage.
- Dense EVA foam 360° exterior padding
- Re-positionable Velcro bow anchor system
- Six interior and exterior accessory pockets
- Compatible with Easton Arrow Tote
- The best YKK® reverse coil double zipper pulls
- Shoulder strap included
- Available in Pro Tour black/grey/orange

**ELITE™ 4716 & 4416 DOUBLE ROLLER BOW CASE**

- Two full-size target bow compatible
- Triple field-replaceable roller bearing wheels.
- Available in two sizes (47" L x 16" W x 10" H) and (44" L x 16" W x 10" H) outside dimensions.
- Double-walled protection – composite armor shield + foam 360° exterior padding.
- Case-cube compatible double fleece main compartment.
- Double seatbelt system to securely anchor bows
- Padded internal divider blanket for layered storage.
- Five interior accessory pockets, adjustable padded walls.
- Three expanding outside luggage compartments
- Four exterior accessory pockets
- The best YKK® reverse coil double zipper pulls.
- Compatible with Easton Arrow Tote
- Airline Travel Cover recommended (sold separately)
- Available in Pro Tour black/grey/orange

ELITE™ RECURVE BACKPACK

- 6061-T6 aluminum internal frame suspension for easy carrying of heavy loads
- Fits up to 27" recurve handles and long limbs
- Collapsible stabilizer sleeve & arrow tote
- External, cinch-able tripod pocket
- Privacy mesh pocket for business cards
- High-denier nylon construction
- Cinch straps for total load security
- Arrow tote included
- Universal rain cover (included)

DELUXE RECURVE PACK NEW

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories.
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items.
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)

UNIVERSAL RAIN COVER NEW

- Compatible with Deluxe & Club XT Recurve Backpacks



CLUB XT™ RECURVE PACK

- Affordable recurve backpack with a modern sophisticated design
- High-denier ballistic POLY fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: Grey, Blue, Red, Black



10-RING TEAM-COLOR PACK

- 1700 cubic inch/27 liter
- Bellowed front pocket
- Twin stretch hydration pockets
- YKK® zippers
- Hydration System compatibility
- Nylon 420D construction
- Colors: All Shown



720 TEAM-COLOR PACK

- Hydration System compatibility
- Durable Nylon 420D construction
- YKK® quality zippers
- Packs into itself for easy transport
- Integrated seat pad
- 1100 cubic inches, 18 liter capacity
- Colors: All Shown

CASE CUBES BOW CASE**ACCESSORY POCKETS**


- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage

**ROLLER BOWCASE TRAVEL COVERS**

- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot

**BOW SLEEVE**

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all bowcases

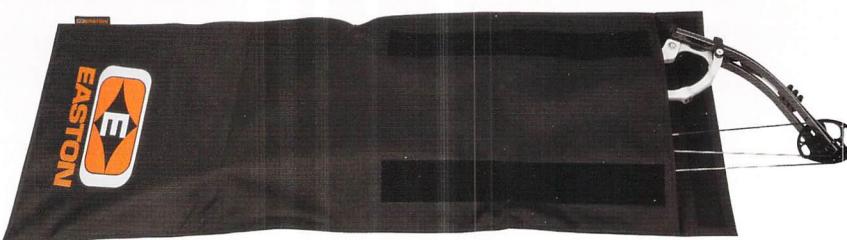**STABILIZER SYSTEM SLEEVE**

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases

**DELUXE MOLDED ARROW CASES**

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length

DELUXE ARM GUARDS NEW

Progressive designs molded from durable, polycarbonate material.

- Durable elastic straps ensure a snug fit
- Available in oval and bone configurations
- Colors: Blue, Yellow, Red, Smoke

**COMFORT FLEX ARM GUARD**


- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: Black

**STIFF SLING**

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange

**CHEST PROTECTOR**

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models XS, S, M, L, XL and XXL
- Colors: Black and White

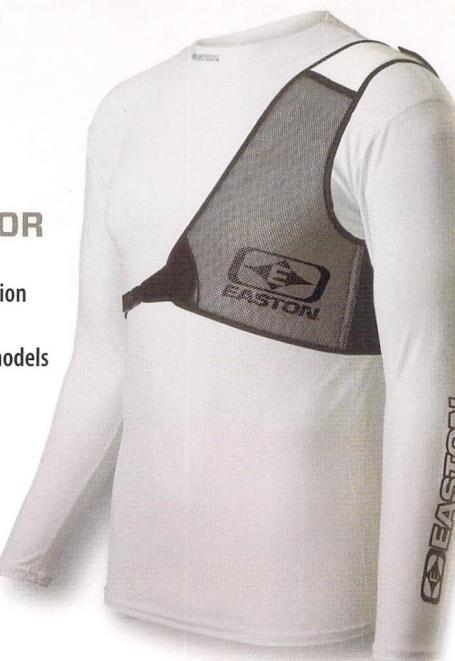**DELUXE PARACORD DIAMOND SLING**

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange

**DELUXE NEOPRENE WRIST SLINGS**

- Durable, lightweight neoprene construction
- Easy-adjust strap
- Designs: Diamond Plate, Elk, Arrow and Whitetail



EASTON TEAM JERSEY

- Quick-dry moisture management
- Lightweight fabric
- Women: XS-XL
- Men: S-4XL

**PRO TOUR™ JACKET AND VEST**

- Soft-shell tech fabric
- Micro fleece lining
- Sizes: S-XXL

**COMPRESSION SHIRTS**

- Thermal dynamic for comfort in hot and cold conditions
- Layer under shooter jerseys or hunting clothing
- Wicks moisture
- Compression comfort
- Sizes: S-XXL



*Limited quantities available.

**PRO TOUR™ SUNGLASSES****PRO-TOUR VISOR NEW**

- One size fits all
- Colors: Grey or NEW Black

SHOOTER TOWEL**BLUE STONE HAT NEW**

- Adjustable Velcro strap

**SHOOTER HAT NEW**

- One size fits most

**EASTON BUCKET HAT**

- Sizes: S/M, L/XL

**FITTED SHOOTER HAT**

- Sizes: S/M, L/XL



POINTS



Bullet Point - Nickel-plated Hardened Steel

- Fits aluminum shafts, Fatboy
- Packaging - Dozen Pack



CB™ Point - Nickel-plated Hardened Steel

- Fits Lightspeed Models
- 80 and 100 grains
- Packaging - Dozen Pack



NIBB Point - Nickel-plated Hardened Steel and Precision Alloy Tube

- Fits Aluminum shafts & A/C/C
- Packaging - Dozen Pack



A/C/C™ One-Piece Parabolic Point - Nickel-plated Hardened Steel

- Fits A/C/C
- Packaging - Dozen Pack



One-Piece & Apollo Point - Nickel-plated Hardened Steel

- Fits A/C/E, A/C/C, A/C/G, Carbon One and Apollo (810-1150) models
- 50 / 75 / 100 grains
- Packaging - Dozen Pack



Full Bore™ & Superdrive One-Piece Point

- Hardened Steel
- 100 / 125 / 150 / 200 / 250 grains
- Packaging - Dozen Pack



Genesis One-Piece Point

- NASP Standard



Triumph™ Point

- 100 / 125 / 150 / 175 / 200 grains
- Packaging - Dozen Pack

BREAK-OFF POINTS



X10® Ballistic Tungsten Break-Off

- Fits X10 and ProTour
- 100 to 120 grains
- Packaging - Dozen Pack



X10® Stainless Steel Break-Off

- Fits X10 and ProTour
- 80 to 100 and 100 to 120 grains
- Packaging - Dozen Pack



A/C/E® Stainless Steel Break-Off

- Fits A/C/E, A/C/G (610-1500) and Pro Field
- Three Sizes - 60 to 80, 80 to 100 and 100 to 120 grains
- Packaging - Dozen Pack



A/C/G™ Stainless Steel Break-Off

- Fits A/C/G (540-430)
- 100 to 120 grains
- Packaging - Dozen Pack



Carbon One™ Stainless Steel Break-Off

- Fits Carbon One
- Three Sizes - 70 to 90, 90 to 110 and 100 to 120 grains
- Packaging - Dozen Pack

SCREW-IN POINTS



RPS - Nickel-plated Hardened Steel

- 17/64" - 50 / 60 / 70 / 80 / 90 / 100 / 110 / 125 grains
- 9/32" - 50 / 60 / 70 / 80 / 90 / 100 / 110 / 125 grains
- Packaging - Dozen Pack



A/C/E® 5-44 - Nickel Plated Hardened Steel


- Fits A/C/E and A/C/G (610-1500)
- 31 / 36 / 41 / 46 / 51 grains
- Packaging - Dozen Pack



8-32 Multi Point

- 17/64" - 75 / 85 / 100 gr.
- 9/32" - 75 / 85 / 100 gr.
- 5/16" - 85 / 100 / 125 gr.
- 11/32" - 85 / 100 / 125 gr.
- Packaging - Dozen Pack or 1000 Count Box

INSERTS



A/C/E®, A/C/G™ and Pro Field 5-44 Screw-in Insert - Nickel-plated

- Hardened steel and precision alloy tube
- Fits all A/C/E, A/C/G (610-1500), Pro Field and Apollo
- 39 / 49 / 59 grains
- Packaging - Dozen Pack



Half-out RPS Insert - Precision Alloy Hard Anodized

- Fits A/C/C (3L-18 to 3-39) arrows
- Packaging - Dozen Pack



RPS Insert

- Fits aluminum arrows, A/C/C (3-49 to 3-71) and Fat Boy
- Packaging - Dozen Pack or 1000 - Count Box



CB Insert

- Fits Lightspeed models
- Packaging - Dozen Pack

UNI BUSHINGS



G-UNI Bushings® - Precision Alloy

- Fits aluminum arrows
- Fits A/C/C, LightSpeed, Platinum (1914 and smaller), Fatboy and FullBore arrows (see charts on select model pages)
- Packaging - Dozen Pack



Super-UNI Bushing® - Precision Alloy

- Fits aluminum arrows
- Fits Fatboy and FullBore arrows (see charts on select model pages)
- Packaging - Dozen Pack


PINS

INSERTS



X10® Pin 7075 - Alloy

- Fits X10 and ProTour Arrows (670-770)
- Packaging - Dozen Pack



ProTour™ Pin 7075 - Alloy (Only™ ProField 620)

- Fits X10 ProTour Arrows (380-620)
- Packaging - Dozen Pack



A/C/E® Pin 7075 - Alloy

- Fits All A/C/E, A/C/G, Pro Field (610-1500), Carbon One (810-1150) and Apollo (1200-1070)
- Packaging - Dozen Pack



A/C/G™ Pin 7075 - Alloy

- Fits All A/C/G (540-430) and Pro Field (380-570)
- Packaging - Dozen Pack



Carbon One™ #1 Pin 7075 - Alloy

- Fits Carbon One (550-730) and Apollo (740-950)
- Packaging - Dozen Pack



Carbon One™ #2 Pin 7075 - Alloy

- Fits Carbon One (500-410) and Apollo (560-670)
- Packaging - Dozen Pack



PIN NOCKS



Pin Nock™ Polycarbonate Press-fit Indexable

- Large or small sizes available
- Fits all nock pins, see arrow models for fitment
- Colors: green, red, blue, orange, lemon lime, and crystal
- Packaging - Dozen Pack



G Pin Nock™ Polycarbonate Press-fit Indexable

- Fits all nock pins, see arrow models for fitment
- Colors: green, red, blue, orange, and lemon lime, and crystal
- Packaging - Dozen Pack

NOCK COLORS

SOLID



- Bone
- White
- Black
- Green
- Orange
- Yellow

NOCKS



N Nock™ - Precision-molded, Press-fit

- Fits Genesis
- Colors: red, white, green and yellow
- Packaging - Dozen Pack or 100-count Bulk



G Nock™ - Precision-molded, Press-fit

- Large (098) or small (088)
- Fits UNI Bushing
- See arrow models for compatibility
- Colors: black, white, green, orange, red, blue and deep red
- Packaging - Dozen Pack or 100-count Bulk



MicroLite™ Super Nock® - Polycarbonate, Press-fit

- Fits FullBore and Fatboy aluminum shafts with Super UNI Bushings
- Colors: red, green, yellow, red and smoke
- Packaging - Dozen Pack or 100-count Bulk



Super Nock® and S Nock™ - Polycarbonate, Press-fit

- Fits FullBore and Fatboy aluminum shafts with Super UNI Bushings
- Colors: black, green, orange and white
- Packaging - Dozen Pack or 100-count Bulk



Deep Six Nock™ - Polycarbonate, Press-fit

- Colors: blue and red
- Packaging - Dozen Pack or 100-count Bulk

TRANSPARENT



- Crystal
- Smoke
- Deep Red
- Red
- Pink
- Blue
- Teal
- Green
- Lemon Lime

Using the Target Arrow Selection Chart

1. Once you have determined your **Correct Target Arrow Length** and **Calculated or Actual Peak Bow Weight**, you are ready to select your correct shaft size:

1.A Compound bows. In the "Calculated Peak Bow Weight" column (left-hand side of the chart), select the column with the type cam on your bow. Locate your **Calculated Peak Bow Weight** in that column.

1.B Recurve bows and Modern Longbows. In the "Actual Peak Bow Weight" column (right-hand side of the chart), select the column with the bow type. Next, locate your **Actual Peak Bow Weight** in that column.


2. Move across that bow-weight row horizontally to the column indicating your **Correct Arrow Length**. Note the letter in the box where your **Calculated or Actual Peak Bow Weight** row and **Correct Target Arrow Length** column intersect. The "Shaft Size" box below the chart with the same letter contains your recommended shaft sizes. Select a shaft from the chart depending on the shaft material, shaft weight, and type of shooting you will be doing. For larger game, you should use heavier shafts.

Selecting the Correct Target Shaft Size


Our Target Shaft Selection Chart will help you find the perfect shaft match for your bow—quickly and easily. Advanced, interactive Spine Weight Comparison and Target Shaft Selection Charts are now available online at www.eastonarchery.com.

1. Determining Correct Target Arrow Length

The **Correct Arrow Length** for bows (including bows with overdraws) is determined by drawing an extra-long arrow to full draw and having someone mark the arrow one inch in front of where the arrow contacts the most forward portion of the arrow rest.

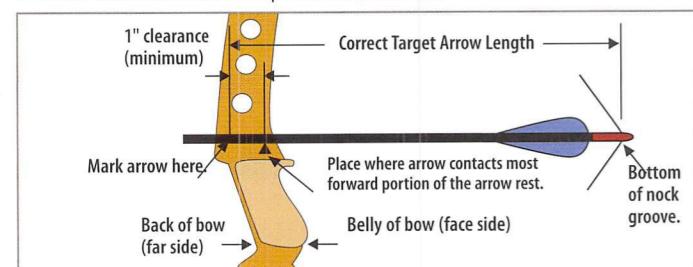

Bow Draw Length. Draw length is measured at full draw from the bottom of the nock groove to the back (far side) of the bow. Actual arrow length and draw length are only the same if the end of the arrow shaft is even with the back of the bow (far side) at full draw.

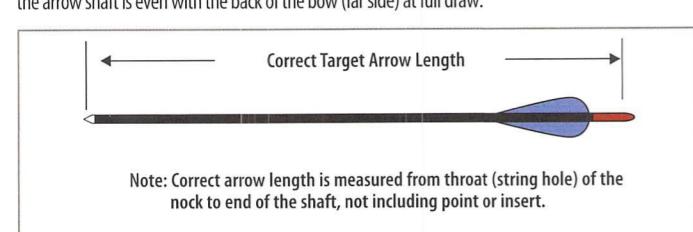

2. Determining Actual Peak Bow Weight Compound Bows

Compound bows must be measured at the peak bow weight as the bow is being drawn and not while letting the bow down.

The suggested shaft sizes in the charts were determined using a "Standard" Setup which includes:

- Use of a release aid
- Compound bow with brace height greater than 6½"

If your setup differs from the "Standard" Setup, use the **Variables** (following) to make adjustments to determine the **Calculated Peak Bow Weight** so the correct arrow size can be selected on the chart.

Variables to the "Standard" Setup for Compound Bows

- Point weight over 100 grains—Add 3 lbs. for each 25 grains heavier than 100 grains.
- Bows with brace heights less than 6½"—Add 5 lbs.
- Finger release—Add 5 lbs.

Correct Arrow Length for Low Poundage Target							
21"	22"	23"	24"	25"	26"	27"	RECURVE BOW Bow Weight-lbs. Finger Release
Y1	Y1	Y2	Y3	Y4	16-20 lbs. (7.3-9.1 kg)		
Y1	Y1	Y2	Y3	Y4	Y5	20-24 lbs. (9.1-10.9 kg)	
Y1	Y1	Y2	Y3	Y4	Y5	24-28 lbs. (10.9-12.7 kg)	
Y1	Y2	Y3	Y4	Y5	Y6	28-32 lbs. (12.7-14.5 kg)	
Y2	Y3	Y4	Y5	Y6	Y7	32-36 lbs. (14.5-16.3 kg)	
Y3	Y4	Y5	Y6	Y7		36-40 lbs. (16.3-18.1 kg)	

Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.

Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch
Group Y1							
1214	2.501	75	5.9	1413	2.036	75	5.9
Group Y3							
1400	1.400	Inspire	6.7	1500	1.500	A/C/G	4.7
1416	1.684	75	7.2	2-00	1.500	A/C/C	4.7
Group Y5							
1250	1.250	A/C/E	5.1	1250	1.250	A/C/E	5.1
1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
3L-00	1.300	A/C/C	5.1	3-00	1.150	A/C/C	5.5
1200	1.200	Apollo	5.5	1150	1.150	Carb1	5.0
1200	1.200	Inspire	7.2	1200	1.200	Apollo	5.5
1514	1.379	X7	6.8	1200	1.200	Inspire	7.2
1516	1.403	75	7.3	1516	1.403	75	7.3
Group Y6							
1250	1.250	A/C/E	5.1	1250	1.250	A/C/E	5.1
1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
3L-00	1.300	A/C/C	5.1	3-00	1.150	A/C/C	5.5
1200	1.200	Apollo	5.5	1150	1.150	Carb1	5.0
1200	1.200	Inspire	7.2	1200	1.200	Apollo	5.5
1514	1.379	X7	6.8	1200	1.200	Inspire	7.2
1516	1.403	75	7.3	1516	1.403	75	7.3
Group Y7							
1000	1.000	A/C/E	5.7	A/C/E	Aluminum/Carbon/Extreme		
1100	1.100	A/C/E	5.1	X10	X10 Shafts (Aluminum/Carbon)		
1000	1.000	X10	5.3	A/C/G	A/C/G (Aluminum/Carbon)		
1000	1.000	A/C/G	5.7	A/C/C	Aluminum/Carbon/Composite		
3-00	1.150	A/C/C	5.5	Carb1	Carbon One N-FUSED® Carbon		
1000	1.000	Carb1	5.0	Apollo	Carbon Apollo		
1070	1.070	Apollo	5.9	Inspire	Carbon Inspire		
1000	1.000	Inspire	7.2	X7	X7 Eclipse (7178 alloy)		
1614	1.153	X7	7.7	75	XX75: Platinum Plus, Tribute, Jazz and Neos (7075 alloy)		
1616	1.079	75	8.4				
Key							

Note: To determine weight at your shaft length, multiply the grains-per-inch (gpi) by your actual shaft length not including point, insert, or UNI Bushing.

Overdraw Compound Bows

If you are using an overdraw, make the variable calculations (if any), and then modify the **Calculated Peak Bow Weight** of your bow using the chart below.

Length of Overdraw

Bow Weight

1" 2" 3" 4" 5"

For 50#-70# Actual/Calculated Peak Bow Weight, add to bow weight - 1# 3# 6# 9# 12#

3. Determining Actual Peak Bow Weight Recurve and Modern Longbows

Your local archery pro shop is the best place to determine the actual draw weight of your bow. **Actual Peak Bow Weight** for recurve bows and longbows should be measured at your draw length.

COMPOUND BOW – Release Aid Calculated Peak Bow Weight-lbs.								Correct Arrow Length for Target • Field • 3D							
ATA Bow Rating up to 275 FPS	ATA Bow Rating 276-300 FPS	ATA Bow Rating 301-340 FPS	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	RECURVE BOW Bow Weight-lbs. Finger Release		
29-35 lbs. (13.2-15.9 kg)	29-35 lbs. (13.2-15.9 kg)	00	01	02	03	T1	T2	T3					21-27 lbs. (9.5-12.2 kg)		
35-40 lbs. (15.9-18.1 kg)	35-40 lbs. (13.2-15.9 kg)	01	02	03	T1	T2	T3	T4	T5				27-32 lbs. (12.2-14.5 kg)		
40-45 lbs. (18.1-20.4 kg)	40-45 lbs. (15.9-18.1 kg)	02	03	T1	T2	T3	T4	T5	T6	T7	T8	T9	32-36 lbs. (14.5-16.3 kg)		
45-50 lbs. (20.4-22.7 kg)	45-50 lbs. (18.1-20.4 kg)	03	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	36-40 lbs. (16.3-18.1 kg)		
50-55 lbs. (22.7-24.9 kg)	50-55 lbs. (20.4-22.7 kg)	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	40-44 lbs. (18.1-20.0 kg)		
55-60 lbs. (24.9-27.2 kg)	55-60 lbs. (22.7-24.9 kg)	T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	44-48 lbs. (20.0-21.8 kg)		
60-65 lbs. (27.2-29.5 kg)	60-65 lbs. (24.9-27.2 kg)	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	T14	48-52 lbs. (21.8-23.6 kg)		
65-70 lbs. (29.5-31.8 kg)	65-70 lbs. (27.2-29.5 kg)	T5	T6	T7	T8	T9	T10	T11	T12	T13	T14		53-57 lbs. (24.0-25.9 kg)		
70-76 lbs. (31.8-34.5 kg)	70-76 lbs. (29.5-31.8 kg)	T6	T7	T8	T9	T10	T11	T12							

Aluminum/Carbon											
	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ⁵	Color/Finish	Sizes	
X10®	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 Pin	Pin Nocks X10 Ovnock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380, 350, 325	
X10® PROTOUR™	6	High-strength carbon fiber bonded to a precision 7075 alloy core tube –single-taper shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 or ProTour Pin	Pin Nocks	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380	
A/C/E®	5	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft	A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	(1250, 1100) ⁶ , 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370	
A/C/C™	8	High-strength carbon fiber bonded to a precision 7075 alloy core tube	RPS Insert or Halfout Insert	One-piece Parabolic, NIBB, or RPS Point	UNI System	G Nock or Pin Nock	±0.5 grains	±.002" guaranteed	Black, Micro-smooth Finish	2-00, 3L-00, 3-00, 2L-04, 2-04, 3X-04, 3L-04, 3-04, 3L-18, 3-18, 3-28, 3-39, 3-49, 3-60, 3-71	
TRIUMPH™	12	Alloy reinforced point end with multi-layer wrapped carbon fiber	N/A	Triumph One-Piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	500, 450, 400, 350	
A/C/G™	7	High-strength carbon fiber bonded to a precision 7075 alloy core tube	A/C/E Insert	Screw-in, One-piece, A/C/E or A/C/G Stainless Steel Break-off	A/C/E & A/C/G Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grain	±.002" guaranteed	Polished Black Carbon	1500, 1300, 1150, 1000, 880, 810, 710, 660, 610, 540, 480, 430	
Carbon											
	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ⁵	Color/Finish	Sizes	
CARBON ONE™	9	UltraLite carbon fibers	A/C/E Insert	Carbon One Stainless Steel Break-off	A/C/E Pin, Carbon One Pin, or Insert Nock	Pin Nock, Pin G Nock, G Nock	±1 grains	±.003"	Black, Micro-smooth Finish	1150, 1000, 900, 810, 730, 660, 600, 550, 500, 450, 410	
APOLLO™	10	UltraLite carbon fibers	A/C/E Insert	Apollo One-Piece	A/C/E Pin, Carbon One Pin, or Insert Nock	Pin Nock, Pin G Nock, G Nock	±2 grains	±.005"	Black, Micro-smooth Finish	1200, 1070, 950, 840, 740, 670, 610, 560	
FULL BORE™	17	SuperLite Carbon multi-layer wrapped fibers	N/A	One-piece Bullet	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	350, 270	
SUPERDRIVE™	16	Multi-layer wrapped Carbon fiber	N/A	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	290	
LIGHT SPEED 3D™ LIGHT-SPEED™	18	SuperLite Carbon multi-layer wrapped fibers	CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.001" ±.003"	Black, Smooth-matte Finish	500, 400, 340	
FAT BOY™	13	SuperLite Carbon multi-layer wrapped fibers	RPS Insert	One-piece or RPS Point	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340	
INSPIRE™	11	Small diameter protruded carbon	NA	Zinc One-piece Point	NA	G Nock or X Nock	NA	NA	Black, Smooth-matte Finish	1400, 1200, 1000, 900, 750, 630, 570	
Aluminum											
	Pg #	Aerospace Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ⁵	Color/Finish	Sizes
X ² 3™ X ² 7™	14	7178-T9	105,000	RPS Insert	NIBB, One-Piece Bullet or RPS Point	Super UNI System	3D Super, Super Nock or S Nock	±3/4%	+.001" Guaranteed	Diamond Polished Silver Anodized	2712, 2312, 2314, 2315
ECLIPSE™	15	7178-T9	105,000	Not Available	NIBB or One-piece Bullet	UNI or Super UNI System	3D Super Nock or G Nock	±3/4%	±.001" Guaranteed	Hard-Anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712
XX75 PLATINUM® PLUS	20	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	UNI or Super UNI System	3D Super Nock or S Nock	±1%	±.002" Guaranteed	Hard-Anodized Platinum Grey	1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315
JAZZ®	21	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional or G Nock ⁶	±2%	±.005" Guaranteed	Hard-Anodized Purple/Silver	1214 ⁶ , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
TRIBUTE™	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-Piece Bullet or RPS Point	Full-Diameter Taper Swag	Conventional or G Nock	±2%	±.005" Guaranteed	Hard-Anodized Black	1214 ⁶ , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
GENESIS™	18	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	N Nock	±2.5 grains	±.005" Guaranteed	Hard-Anodized Bright Blue, Orange	1820
NEOS™	21	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008" Guaranteed	Hard-Anodized Gold	1618

1 Guaranteed straight to more stringent standards than ATA/ASTM methods.
2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.

3 Tensile strength value may vary ±3%.
4 Grains-per-shaft in a dozen bundle.
5 Special order only.
6 1214 size Jazz uses direct-fit G Nock.

Eclipse and Platinum Plus sizes in italics use UNI System and G Nock.
7™ Registered Trademark of Easton.

Size	Shaft Weight		Spine @ 28" Span	Stock Length ³		Conventional Nock Size ⁴	UNI System ⁵		NIBB Point	One-piece Bullet Point	RPS ⁷ Insert Alum.	RPS ⁷ Point Size
	XX75 ¹	X7 ²		75 ¹	X7 ²		UNI Bushing ⁶	Super UNI Bushing ¹⁰				
1214	5.9	—	2.501	26½	—	—	—	—	—	45	—	—
1413	5.9	—	2.036	26	—	7/32	—	—	—	35	—	—
1416	7.2	—	1.684	27	—	7/32	2	—	—	52	—	—
1514	—	6.8	1.379	—	26½	—	5	—	—	61 ⁹	—	—
1516	7.3	—	1.403	27½	—	1/4	3	—	—	48	54	—
1614	—	7.7	1.153	—	28	—	5	—	—	51	—	—
1616	8.4	—	1.079	28½	—	1/4	5	—	—	63	—	—
1618	9.8	—	0.957	32½	—	1/4	8	—	—	56	68	—
1713	7.4	—	1.044	29	—	—	7	—	—	50	—	—
1714	—	8.1	0.963	—	29	—	7	—	—	54	—	—
1716	9.0	—	0.880	29	—	1/4	7	—	—	60	68	17/64
1813	7.9	—	0.874	30	—	1/4	8	—	—	56	—	14
1814	—	8.6	0.799	—	29½	—	8	—	—	60	—	932
1816	9.3	—	0.756	30	—	—	8	—	—	63	74	12
1820	12.2	—	0.592	29½	—	9/32	—	—	—	59	—	932
1913	8.3	—	0.733	31	—	9/32	9	—	—	64	—	516
1914	—	9.3	0.658	—	30½	—	9	—	—	102 ⁹	100	31
1916	10.0	—	0.623	31	—	9/32	9	—	—	64	—	—
2013	9.0	—	0.610	32	—	—	—	—	—	72	82	16
2014	—	9.6	0.579	—	31½	—	(10)	5	—	68	—	516
2016	10.6	—	0.531	32	—	—	—	4	—	80	90	20
2114	9.9	9.9	0.510	31	32½	—	(11)	7	—	78	100	25
2212	—	8.8	0.505	—	32½	—	(13)	9	—	102 ⁹	100	31
2213	9.8	9.9	0.458	31	33½	—	(13)	9	—	88	100	30
2214	—	10.4	0.425</td									



 **EASTON**
technical products

5040 Harold Gatty Drive
Salt Lake City, UT 84116
801.539.1400 • fx 801.539.0139
www.eastonarchery.com