



Brady ELLISON
USA

KU Bonchan
KOR

Jean-Charles VALLADONT
FRA



TARGET 2017

- High-strength carbon fiber bonded to a 7075 alloy core
- Polished black carbon finish
- Straightness: $\pm .0015"$

POINTS • INSERTS • NOCKS



X10 Stainless Steel Break-off
(100/110/120 & 80/90/100 gr.)



X10 Ballistic Tungsten Break-off
(100/110/120 gr.)



X10 Pin™
(8 gr.)



Pin Nock™
(2 gr.)



G Pin™ Nock
(4 gr.)



Over Nock
(6 gr.)

- Weight tolerance: ± 0.5 grains
- Components—sold separately
- Barreled design

SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains
1000	5.3	1.000	28	No limit	90-110
900	5.8	0.900	28	No limit	90-110
830	6.2	0.830	28 $\frac{1}{2}$	No limit	90-110
750	6.4	0.750	29	3.5	100-110
700	6.7	0.700	29	3.5	100-110
650	6.8	0.650	29	3.5	100-110
600	7.0	0.600	30	4.5	100-110
550	7.5	0.550	31	3.5	100-120
500	7.8	0.500	32	4.0	100-120
450	8.1	0.450	33 $\frac{1}{2}$	5.5	100-120
410	8.5	0.410	33 $\frac{3}{4}$	5.5	100-120
380	8.9	0.380	33 $\frac{3}{4}$	6.5	100-120
350	8.8	0.350	34	6.0	100-120
325	9.2	0.325	34 $\frac{1}{4}$	6.0	100-120

1 Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Recommended that no more than these lengths be cut from the front of the shaft.



PROTOUR™

- Lightweight carbon fiber bonded to a precision 7075 alloy core
- Polished black carbon finish
- Straightness $\pm .0015"$

POINTS • INSERTS • NOCKS

NEW 140 GRAIN TUNGSTEN POINTS OPTION



ProTour Pin™
(340 - 620) (8 gr.)



X10 Ballistic Tungsten Break-off
(100/110/120/130/140 gr.)



X10 Ballistic Tungsten Break-off
(100/110/120 gr.)



X10 Pin™
(670 - 770) (8 gr.)



Pin Nock™
(2 gr.)



G Pin™
(4 gr.)



X10 Stainless Steel Break-off
(100/110/120—80/90/100 gr.)


- Weight tolerance: ± 0.5 grains
- Components—sold separately
- Tapered design

SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains
770	6.0	0.770	29	No limit	90-110
720	6.2	0.720	29 $\frac{1}{2}$	No limit	90-110
670	6.5	0.670	29 $\frac{3}{4}$	4.0	100-110
620	6.7	0.620	30	4.5	100-110
570	6.9	0.570	31	5.0	100-120
520	7.3	0.520	32	5.5	100-120
470	7.6	0.470	33 $\frac{1}{4}$	6.0	100-120
420	8.0	0.420	33 $\frac{3}{4}$	6.5	100-120
380	8.4	0.380	34	7.0	100-120
340	8.8	0.340	34	7.0	100-120

1 Due to the taper design of the X10 Pro Tour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Recommended that no more than these lengths be cut from the front of the shaft.

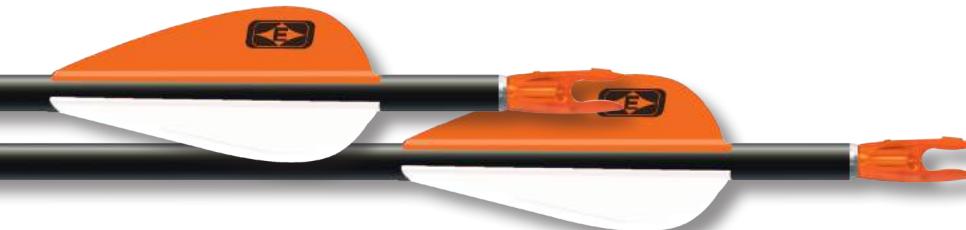

- High-strength carbon fiber bonded to a 7075 alloy core
- Polished black carbon finish
- Straightness: $\pm .0015"$

- Weight tolerance: ± 0.5 grains
- Components—sold separately
- Barelled design

POINTS • INSERTS • NOCKS

A/C/E® Insert and Point System 5-44 Thread

A/C/E Insert	Screw-in Point
Point Weight	#2-31gr. #3-36gr. #4-41gr. #5-46gr. #6-51gr.
Insert Weight	Total Weight (grains)—Insert and Point
H - 39gr.	70 75 80 85 90
J - 49gr.	80 85 90 95 100
L-59gr.	90 95 100 105 110

A/C/E Pin 4MM
(8 gr.)A/C/E Stainless Steel Break-off Point:
(60/70/80—80/90/100—100/110/120 gr.)G Nock™ 4MM
(7 gr.)Pin Nock™
(2 gr.)Screw-in Point
(31, 36, 41, 46, 51 gr.)A/C/E Insert
(39, 49, 59 gr.)One-piece Point
(50 gr.)G Pin™ Nock
(4 gr.)

SPECIFICATIONS

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ³	Recommended Point Weight Range
Grains per Inch	Deflection in Inches	Inches	Inches	Grains	
1250 ²	5.1	1.250	26 $\frac{1}{8}$	No limit	60-70
1100 ²	5.1	1.100	28 $\frac{1}{8}$	No limit	70-80
1000	5.7	1.000	28 $\frac{1}{8}$	No limit	70-80
920	5.8	0.920	28 $\frac{1}{8}$	9.5	70-80
850	5.7	0.850	28 $\frac{1}{8}$	No limit	70-80
780	6.0	0.780	29 $\frac{1}{8}$	No limit	80-90
720	6.4	0.720	29 $\frac{1}{8}$	6.0	80-90
670	5.9	0.670	30 $\frac{1}{8}$	No limit	80-90
620	6.1	0.620	30 $\frac{1}{8}$	No limit	90-100
570	6.3	0.570	31 $\frac{1}{8}$	10.0	90-100
520	6.7	0.520	31 $\frac{1}{8}$	4.5	90-100
470	6.8	0.470	32 $\frac{1}{8}$	6.5	90-110
430	7.0	0.430	32 $\frac{1}{8}$	5.5	100-120
400	7.5	0.400	32 $\frac{1}{8}$	4.0	100-120
370	7.9	0.370	32 $\frac{1}{8}$	4.0	110-120

1 Due to the barrel design of the A/C/E, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 5-6 grains.

2 Available as a special order only. Replaced with A/C/C -00 sizes.

3 Recommended that no more than these lengths be cut from the front of the shaft.

- Lightweight carbon fiber bonded to a 7075 alloy core
- Straightness $\pm .002"$
- Weight tolerance: ± 1.0 grains

- Components—sold separately
- Parallel design


POINTS • INSERTS • NOCKS

A/C/E Stainless Steel Break-off Point:
(60/70/80—80/90/100—100/110/120 gr.)A/C/E Insert
(39, 49, 59 gr.)Screw-in Point
(31, 36, 41, 46, 51 gr.)One-piece Point
(50 gr.)A/C/E Pin 4MM
(8 gr.)Pin Nock™
(2 gr.)G Pin™ Nock
(4 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Recommended Point Weight Range
Grains per Inch	Deflection in Inches	Inches	Inches	Grains
1500	4.7	1.500	28	50-70
1300	5.1	1.300	28 $\frac{1}{2}$	50-70
1150	5.5	1.150	28 $\frac{1}{2}$	50-70
1000	5.5	1.000	29	70-80
880	5.9	0.880	29 $\frac{1}{2}$	70-80
810	6.1	0.810	30	80-90
710	6.5	0.710	30 $\frac{1}{2}$	80-90
660	6.9	0.660	30 $\frac{3}{4}$	80-90
610	7.3	0.610	31	80-90
540 ¹	7.7	0.540	31 $\frac{1}{2}$	100
480 ¹	8.4	0.480	32	100-110
430 ¹	8.9	0.430	32 $\frac{1}{2}$	100-110

430, 480, 540 sizes use unique A/C/G point and nock pin. All others use A/C/E points and nock pins.

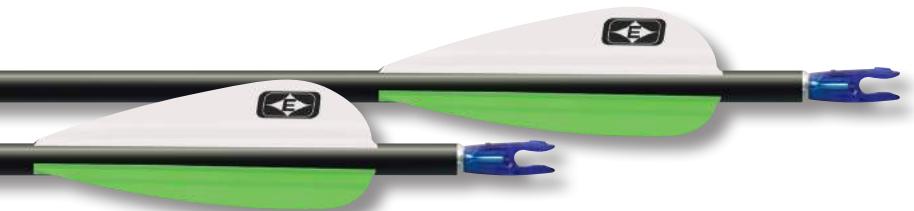

- High-strength carbon fiber bonded to a precision 7075 alloy core tube
- Polished carbon finish
- Straightness: $\pm .002"$

POINTS • INSERTS • NOCKS



A/C/C NIBB Point



A/C/C One-piece Parabolic Point



8-32 Half-out Threaded Insert



RPS Threaded Point



G Nock™ (7 gr.) 4 MM



UNI Bushing®



RPS Threaded Insert

- Weight tolerance: ± 0.5 grains
- Components—sold separately
- Parallel Design

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point/Insert Sizes	UNI System		One-Piece Parabolic Point					NIBB Point	RPS Inserts	RPS Point		
					Bushing	G Nock	Heavy Wt.	Med.Wt.	Light Wt.	Extra Light Wt.	Hyper Light Wt.					
2-00	4.7	1.500	28	-00*	—	7	—*	50*	—*	—*	—*	—	—	—	—	
3L-00	5.1	1.300	28½	-00*	—	7	—*	50*	—*	—*	—*	—	—	—	—	
3-00	5.5	1.150	28½	-00*	—	7	—*	—*	—*	50*	—*	—	—	—	—	
2L-04	6.1	1.020	29	-04	2	7	100	80	70	60	50	—	—	—	—	
2-04	6.5	0.920	29½	-04	2	7	100	80	70	60	50	—	—	—	—	
3X-04	6.7	0.830	29½	-04	2	7	100	80	70	60	50	—	—	—	—	
3L-04	7.0	0.750	30	-04	2	7	100	80	70	60	50	—	—	—	—	
3-04	7.2	0.680	30	-04	2	7	100	80	70	60	50	—	—	—	—	
3L-18	7.5	0.620	31	-18	3	7	—	100	82	70	60	70	16	—	17/64	
3-18	7.8	0.560	31	-18	3	7	—	100	82	70	60	70	16	—	17/64	
3-28	8.1	0.500	31½	-28	4	7	—	100	87	70	60	70	18	—	17/64	
3-39	8.6	0.440	31½	-39	5	7	—	100	85	70	60	70	22	—	932	
3-49	8.8	0.390	32	-49	6	7	—	100	80	70	80	—	9	932		
3-60	9.5	0.340	32½	-60	7	7	—	—	108	90	80	90	—	11	516	
3-71	9.9	0.300	33	-71	8	7	—	—	—	114	90	80	90	—	14	516

1 UNI—Universal Nock Installation System.

2 G Nock available in black, white, green, blue, deep red, orange, red, and comes in .088" and .098" string groove sizes.

3 NIBB Point grain weights are ± 0.5 grains; all other components are ± 1 grain.

4 RPS=Replaceable Point System.

5 RPS target points available in 50-125 grains. — Indicates not available.

* A/C/C-00 sizes use the same size core tube as A/C/E shafts and may use all A/C/E points, inserts, and nocks.

CARBON ONE®

- High-strength carbon fibers
- Micro-smooth finish
- Straightness: $\pm .003"$
- Weight tolerance: ± 1 grain

POINTS • INSERTS • NOCKS

Carbon One Stainless Steel Break-Off
(70/80/90—90/100/110 gr.—100/110/120 gr.)One Piece Point
(1400-2000 spine)G Nock™ 4MM
(7 gr.)G Pin™ Nock
(4 gr.)

- Components—sold separately
- Also uses A/C/E components
- Parallel Design

NEW SIZES

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Point	Nock Pin Adapter	Nock	Grains per Inch		Deflection in Inches		Inches	
							Grains per Inch	Deflection in Inches	Grains per Inch	Deflection in Inches	Grains per Inch	Deflection in Inches
2000	3.4	2.00	28 1/4	70 Gr. One Piece	A/C/E	G Pin Nock/G Nock	—	—	—	—	—	—
1800	3.6	1.80	28 1/2	70 Gr. One Piece	A/C/E	G Pin Nock/G Nock	—	—	—	—	—	—
1600	3.8	1.60	28 3/4	70 Gr. One Piece	A/C/E	G Pin Nock/G Nock	—	—	—	—	—	—
1400	4.2	1.40	29	70 Gr. One Piece	A/C/E	Pin Nock	—	—	—	—	—	—
1150	5.0	1.150	28 1/8	Carbon One	A/C/E	G Pin Nock	—	—	—	—	—	—
1000	5.0	1.000	28 3/8	90/80/70	A/C/E	G Nock	—	—	—	—	—	—
900	5.3	.900	28 3/4	80/90	A/C/E	G Nock	—	—	—	—	—	—
810	5.8	.810	29 1/8	80/90	A/C/E	G Nock	—	—	—	—	—	—
730	6.0	.730	29 3/4	—	—	—	—	—	—	—	—	—
660	6.6	.660	30 3/8	Carbon One	Carbon One-1	Pin Nock	—	—	—	—	—	—
600	6.9	.600	30 3/4	110/100/90	—	G Pin Nock	—	—	—	—	—	—
550	6.9	.550	31 3/32	—	—	G Nock	—	—	—	—	—	—
500	7.4	.500	31 1/2	Carbon One	Carbon One-2	Pin Nock	—	—	—	—	—	—
450	8.1	.450	31 7/8	120/110/100	—	G Pin Nock	—	—	—	—	—	—
410	8.5	.410	32 3/32	—	—	G Nock	—	—	—	—	—	—

Carbon One-#1 Pin

(550-730)

(9 gr.)

Carbon One-#2 Pin

(500-410)

(9 gr.)

Pin Nock™

(2 gr.)

A/C/E Pin™

(810-1150)

(9 gr.)

- Micro-smooth finish
- Straightness: $\pm .005"$
- Weight tolerance: ± 2.0 grain

POINTS • INSERTS • NOCKS



A/C/E Insert
(39, 49, 59 gr.)



Carbon One Stainless Steel Break-off
(70/80/90—90/100/110 gr.—100/110/120 gr.)



Pin Nock™
(2 gr.)



A/C/E Stainless Steel Break-off Point:
(60/70/80—80/90/100—100/110/120 gr.)



Apollo One-piece Point
(50/75/100 gr.)



G Pin™ Nock
(4 gr.)



Steel Point
(70 gr. for 1400-2000 sizes)



Carbon One-#2 Pin
(500-410) (9 gr.)



Carbon One-#1 Pin
(550-730) (9 gr.)

NEW SIZES

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Apollo	Nock Pin
	Grains per Inch	Deflection in Inches	Inches	Grains	
2000	3.4	2.000	28.25	70 Grain One Piece	A/C/E
1800	3.6	1.800	28.50	70 Grain One Piece	A/C/E
1600	3.8	1.600	28.75	70 Grain One Piece	A/C/E
1400	4.2	1.400	29	70 Grain One Piece	A/C/E
1200	5.5	1.200	27.5	50 Grain	A/C/E
1070	5.9	1.070	28	50 Grain	A/C/E
950	6.2	0.950	28.5	75 Grain	Carbon One - 1
840	6.5	0.840	29	75 Grain	Carbon One - 1
740	7.2	0.740	29.5	75 Grain	Carbon One - 1
670	7.7	0.670	30	75 Grain	Carbon One - 1
610	8.1	0.610	30.5	100 Grain	Carbon One - 2
560	8.4	0.560	31	100 Grain	Carbon One - 2

All Apollo sizes use: Pin Nock, G Pin Nock, G Nock



INSPIRE™

- Small-diameter, micro-smooth carbon finish
- Available in seven sizes
- One-piece points
- Parallel design

POINTS • INSERTS • NOCKS



Target Point
(50/75 gr.)



G Nock™ 4 MM
(7 gr.)



X Nock™ 4 MM
(9 gr.)



Steel Target Point
(70 gr. for 1400-2000 sizes)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Glue-In Point	Nock
	Grains per Inch	Deflection in Inches	Inches	Grains	
2000	3.4	2.000	28 ¹ / ₄	70	G
1800	3.6	1.800	28 ¹ / ₂	70	G
1600	3.8	1.600	28 ³ / ₄	70	G
1400	4.2	1.400	29	50	G
1200	7.2	1.200	27 ¹ / ₄	50	G
1000	7.2	1.000	27 ¹ / ₂	50	G
900	7.7	0.900	28 ¹ / ₂	50	G
750	8.1	0.750	29 ¹ / ₂	50	G
630	7.9	0.630	30 ¹ / ₂	75	X
570	8.2	0.570	31 ¹ / ₂	75	X



- Specifically engineered for indoor and 3D
- 23/64" (9.3mm) outside diameter
- Multi-layer wrapped carbon fibers
- Smooth matte black finish

POINTS • INSERTS • NOCKS



One-piece Point
(150/300 gr.)



RPS Point



FatBoy Insert



G-UNI Bushing®



Super UNI Bushing®
(19 gr.)



G Nock™ 4 MM
(7 gr.)



MicroLite™ Super Nock® 6.5 MM
(8 gr.)



Super Nock® or 3D Super Nock® 6.5 MM
(13 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super ¹ UNI Bushing	G Nock	G ¹ UNI Bushing	FatBoy RPS Insert	One-piece Point	RPS Point ²
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains	O.D. Inches
500	7.1	0.500	31½	13	8	9	7	13	40	80/100	11/32
400	7.8	0.400	32	13	8	9	7	13	40	80/100	11/32
340	8.3	0.340	33¼	13	8	9	7	13	40	80/100	11/32

1 Super or G-UNI Bushing factory installed.

2 RPS screw-in points available in 50-125 grains.

*FatBoy is 23 O.D. World Archery Tournament compliant.



SUPERDRIVE 25™

- Straightness: ± .002"
- Weight tolerance: ± 1.0 grain
- 25/64" outside diameter
- Specifically engineered for indoor and 3D
- Black, smooth matte finish

POINTS • INSERTS • NOCKS



G-UNI Bushing®
(18 gr.)



Super UNI Bushing®
(19 gr.)



Pin Adapter



SuperDrive One-piece Point
(100 & 125 gr.)



G Nock™ 4 MM
(7 gr.)



Super Nock® 6.5 MM
(13 gr.)



G Pin™ Nock®
(4 gr.)



Pin Nock®
(2 gr.)



MicroLite™ Super Nock® 6.5 MM
(8 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Super Nock	Microlite Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	Pin Nock Adapter	One-piece Point
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains
290	7.8	0.290	32	13	8	16	7	18	15	100/125



- 7178-T9 aerospace alloy diamond polished anodized silver finish
- Straightness: $\pm .001"$

POINTS • INSERTS • NOCKS



One-piece Point
(150/300 gr.)



Super UNI Bushing®
(19 gr.)



Super Nock® 6.5 MM
(13 gr.)



MicroLite™ Super Nock® 6.5 MM
(8 gr.)



3D Super Nock® 6.5 MM
(13 gr.)

- Weight tolerance: $\pm 0.75\%$
- Strength (PSI): 105,000
- Components—sold separately

SPECIFICATIONS

Model	Shaft Size	Shaft Weight	Spine @ 28" Span	Stock Length	UNI Bushing	Super Nock	RPS Insert	One-Piece Point	RPS Point
X ²³	2312	9.5	0.423	33	11	13	37	100	11/32
X ²³	2314	10.8	0.391	33.5	10	13	34	100	11/32
X ²³	2315	11.8	0.340	34	11	13	37	100	11/32
X ²⁷	2712	11.3	0.260	34.5	19	13	—	150/300	—

X7 ECLIPSE®

- 7178-T9 aerospace alloy
- Hard-anodized black finish
- Straightness: $\pm .001"$

- Weight tolerance: $\pm 0.75\%$
- Strength (psi): 105,000

POINTS • INSERTS • NOCKS



NBB Point



One-piece Point



RPS Point



G Nock™ 4 MM
(for sizes 1914 and smaller)
(7 gr.)



RPS Insert



G-UNI Bushing®
(for sizes 1914 and smaller)



Super UNI Bushing®
(19 gr.)



MicroLite™ Super Nock® 6.5 MM
(8 gr.)




3D Super Nock® 6.5 MM
(13 gr.)

SPECIFICATIONS

1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2413, 2511, 2512, 2613, 2712

• G-UNI or Super UNI Bushing—installed • Nocks and points—sold separately

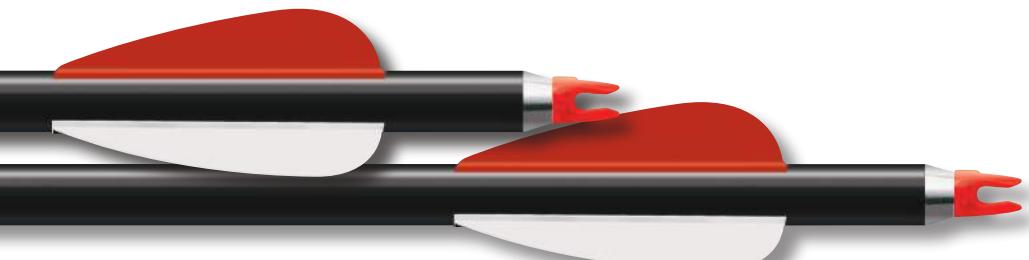

FMJ™ MATCH

NEW FULL METAL JACKET MATCH

- 7075 aerospace alloy diamond polished anodized silver finish
- Guaranteed straightness: $\pm .001"$
- Weight tolerance: ± 2.0 Grains
- Components—sold separately

POINTS • INSERTS • NOCKS



Carbon One Stainless Steel Break-Off
(100/110/120 gr.)



G Nock™ 4 MM
(7 gr.)

SPECIFICATIONS

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	G Nock
	Grains per Inch	Deflection in Inches	Inches	Grains
375	10.3	0.375	32	7
400	10.0	0.400	31½	7
450	9.4	0.450	31¼	7
490	8.9	0.490	31	7
530	8.4	0.530	30¾	7



TRIUMPH™

- All four sizes made to max World Archery 9.3mm O.D.
- Built-in 7% F.O.C.
- Front reinforcement for durability
- Multi-layer carbon fiber and 7075 alloy

POINTS • INSERTS • NOCKS



Triumph Point



Super UNI Bushing®
(19 gr.)



G-UNI Bushing®



Pin Adapter
(13 gr.)

MicroLite™ Super Nock® 0.5mm
(8 gr.)



Super Nock® or
3D Super Nock® 0.5mm
(13 gr.)



G Nock™ 4 MM
(7 gr.)



G Pin™ Nock
(4 gr.)



Pin Nock®
(2 gr.)

SPECIFICATIONS

Size	Shaft Weight @ 28"	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super UNI Bushing	G Nock	G UNI Bushing	One-piece Point
	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains
500	279	0.500	30¼	13	8	12	7	16	100/125/150/175/200
450	290	0.450	30¾	13	8	12	7	16	100/125/150/175/200
400	298	0.400	31¼	13	8	11	7	15	100/125/150/175/200
350	312	0.350	31¾	13	8	11	7	15	100/125/150/175/200

Triumph is World Archery Maximum Diameter Compliant in All Sizes



- 7075 aerospace alloy
- Hard-anodized
- Straightness: $\pm .005"$

- Weight tolerance: $\pm 2.5\%$
- Strength (psi): 90,000
- UNI bushing-installed

POINTS • INSERTS • NOCKS



One-piece Point



G-UNI Bushing®



N Nock™
(7 gr.)



National Archery in the Schools Program

LIGHTSPEED™ + LIGHTSPEED™ 3D

- Multi-layer wrapped carbon fibers
- Smooth matte black finish
- 3D straightness: $\pm .001"$
- LightSpeed straightness: $\pm .003"$
- LightSpeed 3D straightness: $\pm .001"$

POINTS • INSERTS • NOCKS



CB Point



RPS Threaded Point



G-UNI Bushing®



CB Threaded Insert



G Nock™ 4MM
(7 gr.)


SPECIFICATIONS

Size	Shaft Weight	Shaft Weight @ 29"	Spine @ 28" Span	Stock Length	UNI Bushing ¹	G Nock	CB Insert	CB Point ²	RPS Point
	Grains per Inch	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	O.D. Inches	
500	6.5	189	0.500	31½	12	7	21	80/100	932
400	7.4	215	0.400	32	12	7	21	80/100	932
340	8.2	238	0.340	32½	12	7	21	80/100	516

1 G-UNI Bushing factory installed.

2 RPS screw-in points, available in 50-125 grains.

Note: one-size CB Insert and CB Point fits all LightSpeed shaft sizes.

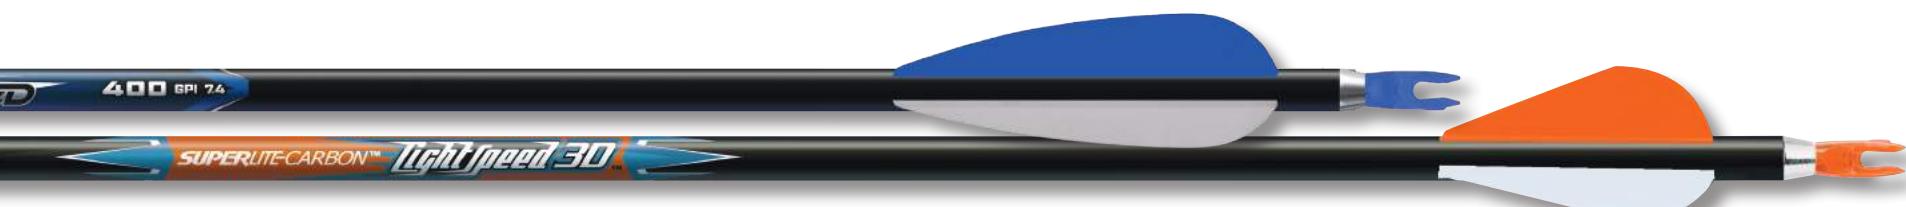

XX75™ PLATINUM® PLUS

- 7075-T9 aerospace alloy
- Hard-anodized finish
- Guaranteed straightness: $\pm .002"$
- Weight tolerance: $\pm 1\%$
- Strength (psi): 96,000

POINTS • INSERTS • NOCKS



SPECIFICATIONS

Sizes: 1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315

- G-UNI or Super UNI Bushing—installed
- Nocks and points—sold separately

**XX75® JAZZ™**

- 7075 aerospace alloy
- Hard-anodized finish
- Guaranteed straightness: $\pm .005"$
- Weight tolerance: $\pm 2\%$
- Strength (psi): 90,000
- Precision-ground nock swage

POINTS • INSERTS • NOCKS

**TRIBUTE™**

- 7075 aerospace alloy
- Hard-anodized black finish
- Guaranteed straightness: $\pm .005"$
- Weight tolerance: $\pm 2\%$
- Strength (psi): 90,000
- Precision-ground nock swage

POINTS • INSERTS • NOCKS



SPECIFICATIONS

Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

- Components—sold separately
- 1214 size uses the direct-fit G Nock

**NEOS™**

- 7075 aerospace alloy
- Hard-anodized gold
- Guaranteed straightness: $\pm .008"$
- Weight tolerance: $\pm 5\%$
- Precision-ground nock swage

POINTS • INSERTS • NOCKS



SPECIFICATIONS

Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

- Components—sold separately
- 1214 size uses direct-fit G Nock

SPECIFICATIONS

Sizes: 1618

- Components—sold separately

POINTS • INSERTS • NOCKS

POINTS



Bullet Point - Nickel-plated Hardened Steel

- Fits aluminum shafts, Fatboy
- 80 and 100 grains
- Packaging - Dozen Pack



CB™ Point - Nickel-plated Hardened Steel

- Fits Lightspeed Models
- 80 and 100 grains
- Packaging - Dozen Pack



NIBB Point - Nickel-plated Hardened Steel and Precision Alloy Tube

- Fits Aluminum shafts, A/C/C and Carbon One arrows
- Packaging - Dozen Pack



A/C/C™ One-Piece Parabolic Point - Nickel-plated Hardened Steel

- Fits A/C/C and Carbon One Arrows
- 80 and 100 grains
- Packaging - Dozen Pack



One-Piece & Apollo Point - Nickel-plated Hardened Steel

- Fits A/C/E, A/C/C, A/C/G, Carbon One and Apollo (810-1150) models
- 50 / 75 / 100 grains
- Packaging - Dozen Pack



Genesis One-Piece Point

- NASP Standard



SuperDrive One-piece Point

- 100 & 125 grains



Steel Target Point

- Carbon One, Apollo, Inspire
- 70 grain
- For sizes 1400-2000

BREAK-OFF POINTS



NEW 140 GRAIN OPTION X10® Ballistic Tungsten Break-Off

- Fits X10 and ProTour
- 80 to 120 grains & 100 to 140 grains
- Packaging - Dozen Pack



X10® Stainless Steel Break-Off

- Fits X10 and ProTour
- 80 to 100 and 100 to 120 grains
- Packaging - Dozen Pack



A/C/E® Stainless Steel Break-Off

- Fits A/C/E, A/C/G (610-1500)
- Three Models - 60 to 80, 80 to 100 and 100 to 120 grains
- Packaging - Dozen Pack



A/C/G™ Stainless Steel Break-Off

- Fits A/C/G (540-430)
- 100 to 120 grains
- Packaging - Dozen Pack



Carbon One™ Stainless Steel Break-Off

- Fits Carbon One (600-1150)
- Three Models - 70 to 90, 90 to 110 and 100 to 120 grains
- Packaging - Dozen Pack

SCREW-IN POINTS



RPS - Nickel-plated Hardened Steel

- 17/64" - 50 / 60 / 70 / 80 / 90 / 100 / 110 / 125 grains
- 9/32" - 50 / 60 / 70 / 80 / 90 / 100 / 110 / 125 grains
- Packaging - Dozen Pack



A/C/E® 5-44 - Nickel Plated Hardened Steel

- Fits A/C/E and A/C/G (610-1500)
- 31 / 36 / 41 / 46 / 51 grains
- Packaging - Dozen Pack



8-32 Multi Point

- 17/64" - 75 / 85 / 100 gr.
- 9/32" - 75 / 85 / 100 gr.
- 5/16" - 85 / 100 / 125 gr.
- 11/32" - 85 / 100 / 125 gr.
- Packaging - Dozen Pack or 1000 Count Box

INSERTS



A/C/E®, A/C/G™ and 5-44 Screw-in Insert - Nickel-plated

- Hardened steel and precision alloy tube
- Fits all A/C/E, A/C/G (610-1500) and Apollo
- 39 / 49 / 59 grains
- Packaging - Dozen Pack



Half-out RPS Insert - Precision Alloy Hard Anodized

- Fits A/C/C (3L-18 to 3-39) arrows
- Packaging - Dozen Pack



RPS Insert

- Fits aluminum arrows, A/C/C (3-49 to 3-71) and Fat Boy
- Packaging - Dozen Pack or 1000 Count Box



CB Insert

- Fits Lightspeed models
- Packaging - Dozen Pack

UNI BUSHINGS



G-UNI Bushings* - Precision Alloy

- Fits aluminum arrows
- Fits A/C/C, LightSpeed, Platinum (1914 and smaller), Fatboy, Superdrive 25 and FullBore arrows (see charts on select model pages)
- Packaging - Dozen Pack



Super-UNI Bushing* - Precision Alloy

- Fits aluminum arrows
- Fits Fatboy, Superdrive 25 and FullBore arrows (see charts on select model pages)
- Packaging - Dozen Pack

PINS



X10® Pin 7075 - Alloy

- Fits X10 and ProTour Arrows (670-770)
- Packaging - Dozen Pack



ProTour™ Pin 7075 - Alloy

- Fits X10 ProTour Arrows (380-620)
- Packaging - Dozen Pack



A/C/E® Pin 7075 - Alloy

- Fits All A/C/E, A/C/G Carbon One (810-1150) and Apollo (1200-1070)
- Packaging - Dozen Pack



A/C/G™ Pin 7075 - Alloy

- Fits All A/C/G (540-430)
- Packaging - Dozen Pack



Carbon One™ #1 Pin 7075 - Alloy

- Fits Carbon One (550-730) and Apollo (740-950)
- Packaging - Dozen Pack



Carbon One™ #2 Pin 7075 - Alloy

- Fits Carbon One (500-410) and Apollo (560-670)
- Packaging - Dozen Pack

PIN NOCKS



Pin Nock™ Polycarbonate Press-fit Indexable

- Large or small sizes available
- Fits all nock pins, see arrow models for fitment
- Colors: green, red, blue, orange, lemon lime, and crystal
- Packaging - Dozen Pack



G Pin Nock™ Polycarbonate Press-fit Indexable

- Fits all nock pins, see arrow models for fitment
- Colors: green, red, blue, orange, and lemon lime, and crystal
- Packaging - Dozen Pack

NOCK COLORS

SOLID



- Bone
- White
- Black
- Green
- Orange
- Yellow

TRANSPARENT



- Crystal
- Smoke
- Deep Red
- Red
- Pink
- Blue
- Teal
- Green
- Lemon Lime

NOCKS



N Nock™ - Precision-molded, Press-fit

- Fits Genesis
- Colors: red, white, green and yellow
- Packaging - Dozen Pack or 100-count Bulk



G Nock™ - Precision-molded, Press-fit (4MM)

- Large (098) or small (088)
- Fits UNI Bushing
- See arrow models for compatibility
- Colors: black, white, green, orange, red, blue and deep red
- Packaging - Dozen Pack or 100-count Bulk



MicroLite™ Super Nock* - Polycarbonate, Press-fit (6.5 MM)

- Fits FullBore and Fatboy aluminum shafts with Super UNI Bushings
- Colors: red, green, yellow, red and smoke
- Packaging - Dozen Pack or 100-count Bulk



Super Nock* and S Nock™ - Polymer Alloy, Press-fit (6.5 MM)

- Fits FullBore and Fatboy aluminum shafts with Super UNI Bushings
- Colors: black, green, orange and white
- Packaging - Dozen Pack or 100-count Bulk



Deep Six Nock™ - Polycarbonate, Press-fit (4MM)

- Colors: blue and red
- Packaging - Dozen Pack or 100-count Bulk



X10® Overnock - Polymer Alloy, Press-fit

- Fits X10, see arrow models for fitment
- Colors: orange, yellow and green
- Packaging - Dozen Pack



H Nock™ - Polycarbonate, Press-fit (6MM)

- Fits H Diameter Carbon Shafts
- Colors: black, white, blue, yellow, green, orange, deep red and pink
- Packaging - Dozen Pack



Conventional Nock for Swaged Shafts

- Fits swaged aluminum arrows
- Colors: black, green, orange, white, blue, red, and teal
- Packaging - Dozen Pack or 100-count Bulk



3D Super Nock* - Polycarbonate, Press-fit (6.5 MM)

- Fits FullBore and Fatboy aluminum shafts with Super UNI Bushings
- Colors: black, green, orange and white
- Packaging - Dozen Pack or 100-count Bulk



STABILIZERS

CONTOUR CS™

Quickly becoming a favorite of champions, the Contour CS™ features the most extreme stiffness to weight ratio we have ever developed for a stabilizer. Featuring aerospace-grade graphite fiber, the Contour CS is optimized for shooters looking for the stiffest possible stabilizer with superior hold and a wind-cheating slim profile for rock-solid aiming. Contour CS™—the most advanced stabilizer ever, from the company that pioneered carbon stabilizers—Easton.

	CONTOUR CS Stabilizer			CONTOUR CS Side Rod	
Size	27 in-69 cm	30 in - 76 cm	33 in - 84 cm	12 in-30 cm	15 in - 76 cm
Ounces	4.0	4.3	4.5	2.6	2.85
Grams	115	122	128	74	81

EASTON
ULTRA-HIGH MODULUS CARBON

Contour CS

EASTON

CONTOUR™

Proven performance Contour stabilizer uses a complex carbon fiber construction to damp out post-shot vibration while providing an unmatched aiming experience, even in crosswinds. The Windcutter-360™ design of Contour promotes a steady confidence in crosswinds while the large-diameter base promotes enhanced vibration reduction with no need for rubber decouplers. Choose the super-light, original Contour for a slightly softer feel on follow-through. Light and efficient, Contour is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari-weights for competitors seeking the most compact setup.

	CONTOUR Target Stabilizers				CONTOUR Side Rod		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9
Grams	106	114	123	131	71	75	83



EASTON

EASTON

Team Russia wields Contour for Rio 2016



PRO-LINK™ EXTENDER

The podium-proven Easton Pro-Link stabilizer extension is reinforced with a full-length Internal Stainless Steel Reinforcement Beam. This super-strong beam links the precision internal-bonded ferrules at each end to create a torque-resistant system capable of handling heavy loading, abusive v-bar torquing, and the stress of high-energy bows. The Internal Stainless Steel Beam of Pro-Link Extension has been tested and proven at the highest levels of competition by some of the best archers on the planet. Pro-Link is also the stiffest extension we've ever made. The precision-made Pro-Link extension is ideally matched to an Easton stabilizer, and is fully compatible with most other ATA compliant stabilizer systems with 5/16-24 threads.



	PROLINK Extender		
Size	6 in-15 cm	5 in - 13 cm	4 in - 10 cm
Ounces	4.64	4.32	4.00
Grams	131.5	122.5	113.4



Pro-link internal steel beam system

EASTON

EASTON

EASTON

STABILIZERS

Z FLEX™

provides extreme stiffness and high-moment weight system compatibility with minimum aiming float. AVRS™ chamber for rapid vibration amplitude dissipation after the shot. Z-Flex is compatible with 5/16"-24 flat vari-weights.

ZFlex and A/C Pro stabilizers come with a reusable protective sleeve



A/C™ PRO

Easton's technologically advanced A/C Pro stabilizers are among the most efficient stabilizers ever developed. The Ultra-High Resonance A/C Pro stabilizer is equipped with the proven, low-mass AVRS system. Compatible with 1/4"-20 weight systems or 5/16"-24 flat vari-weights.



NEW

MICRO FLEX™

The All-New MicroFlex™ stabilizer provides an excellent balance of low weight, high stiffness and smaller diameter to cheat the wind, in a highly efficient, High Modulus Carbon design. Micro-Flex™ is compatible with 5/16"-24 flat vari-weights or traditional 1/4-20 weights.



Size	Z-Flex Stabilizer			Z-Flex Stabilizer Rod			
	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in - 84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9
Grams	164	175	186	196	92	99	111

- Ultra-stiff design for steady aiming
- AVRS damping for active-shock management
- Lowest mass and highest efficiency

Size	A/C PRO Stabilizer			A/C PRO Side Rod		
	24 in-61 cm	29 in-74 cm	34 in-86 cm	9 in-23 cm	10 in-25 cm	11 in-28 cm
Ounces	4.3	5.0	6.0	1.7	1.8	1.9
Grams	122	142	170	48	51	54

- Proven A/C Construction
- AVRS Damping System for Shock Management
- Stiff Design for Steady Aiming

Size	Micro-FLEX Stabilizer			Micro-FLEX Side Rod	
	24 in-61 cm	27 in-69 cm	30 in-76 cm	10 in-25 cm	12 in-30 cm
Ounces	5.8	6.2	6.5	3.2	3.5
Grams	164	175	186	92	99

- Ultra-stiff design for steady aiming
- Fast-damping High Frequency response
- 100% High Modulus Carbon at a smaller 0.600" diameter

COMPONENTS

MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included



ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt included



CONTOUR AND Z-FLEX V-BAR CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down



VARI-WEIGHTS



ORIGINAL VARI-WEIGHTS 1/4-20 THREAD

	Ounces	Grams
Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43



FLAT VARI-WEIGHTS 5/16-24 THREAD

	Ounces	Grams
Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114

*available in black

TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz. and 1.0 FL oz.



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz. and 1.0 FL oz.



FASTSET™ VANE GEL

- Sizes: 3 gram and 9 gram



24-HOUR INSERT EPOXY SYRINGE

- Provides a permanent bond
- Flexible, non-brittle formula



3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner—removes dirt, wax & contaminants from bowstring
- Bowstring Revitalizer—restores color & penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



VC3® THREAD LOCKER

- Unique reusable formula.
- Apply to broadheads, practice points, & bow accessories for solid mounting and reduced vibration



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube

Fletch-Tite® is a registered trademark of Bohning Company LTD



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula makes for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



TOOLS & SUPPLIES

ARROW PULLER WEDGE

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



ARROW PULLER PUCK

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage



PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and 2.8 flat blade



PRO HEX STUBBY 10 PIECE

"L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes: 7/32, 3/16, 1/4



PRO ARCHERY NEEDLE NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



ELITE NOCK AND D-LOOP PLIERS

- Convenient and versatile archery tool
- Patented dual-jaw design
- Maximizes mechanical advantage for tightest possible D-loops
- Six tools in one



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



BROADHEAD WRENCH

- For safe installation & removal of broadheads from arrows



PRO SHOP TOWELS

- Durable and disposable lint-free towel especially suited for preparing arrow shafts for fletching and point installation



BOW STRINGER

- Molded rubber-cupped stringer for easy and recommended stringing of target recurve bow



BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-sights
- Includes 1m red thread & 1m black thread



BCY POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool

TOOLS & SUPPLIES


T AND L BOW SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



BCY* #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools

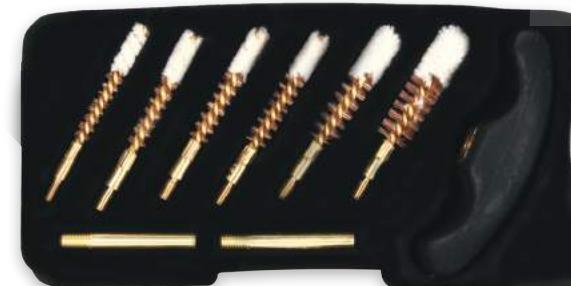

9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to max 27/64" diameters

ARCHERY ESSENTIALS™ 12-PIECE PRO SHOP TOOL KIT, 8-PIECE VALUE PACK, AND 6-PIECE CROSSBOW ESSENTIALS KIT

Kit items save 30% versus items sold separately.

- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors.

12 and 8 Piece Kits Include:

- Extra Large Folding Allen Wrench Set
- Nock Installation & Removal Tool
- Wedge Arrow Puller
- Zippered Case Cube
- Bowstring Wax
- Serving Thread
- D-Loop Rope
- Broadhead Wrench
- D-Loop Pliers
- Bow Square- L Model
- Small Folding Allen Wrench Set
- Arrow Prep Tool Kit

12-Piece Kit Adds:

- Small Folding Allen Wrench Set
- Zippered Cube Case
- Rail Lube Wax
- Wedge Arrow Puller
- Broadhead Wrench
- Scope Lens Cleaner Cloth

6-Piece Crossbow Kit includes:

- Small Folding Allen Wrench Set
- Zippered Cube Case
- Rail Lube Wax
- Wedge Arrow Puller
- Broadhead Wrench
- Scope Lens Cleaner Cloth



* BCY is a trademark of BCY Bowstring.

BEGINNER ARCHERY

BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard

Kit colors: Black, Pink, and Realtree™ Xtra



SCOUT 2™


- Durable fiberglass construction
- Over Nock - installed
- Sleeve Point - installed
- 26" or 28"



NEW

VECTOR™ CARBON ARROWS

- Ideal for beginners looking for higher performance
- Durable wrapped carbon construction
- Nocks and 65-grain points installed-ready to shoot
- Shield-feather fletch
- Available in 1000 and 1400 spine sizes
- Available in 4-pack or 72-count case
- 28" length

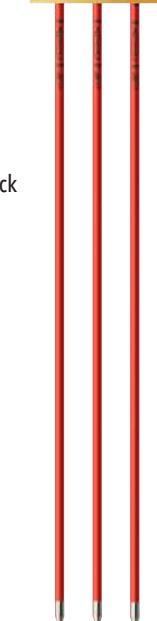

XX75®

- 7075 aerospace alloy
- Guaranteed straightness: $\pm .005$
- Weight tolerance: $\pm 2.5\%$
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock
- Pre-cut to 28" with point installed



BEGINNER FINGER TAB

- Ambidextrous design works well for right and left handed archers



ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high-strength 28" arrows
- Finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and Pink

TOOLS & SUPPLIES

EZ FLETCH™ TOOL



(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"



(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



SPIN WING VANES®



Colors ● Black ○ White ● Blue ● Red ○ Yellow

1.75-inch vanes available in right or left • Packaging - 50-count bag

DIAMOND™ SHRINK CRESTS

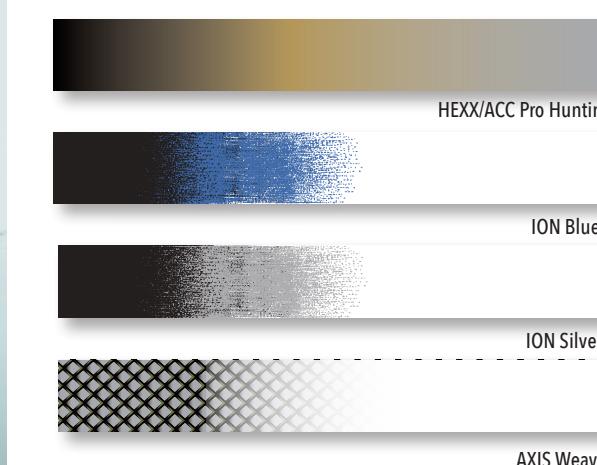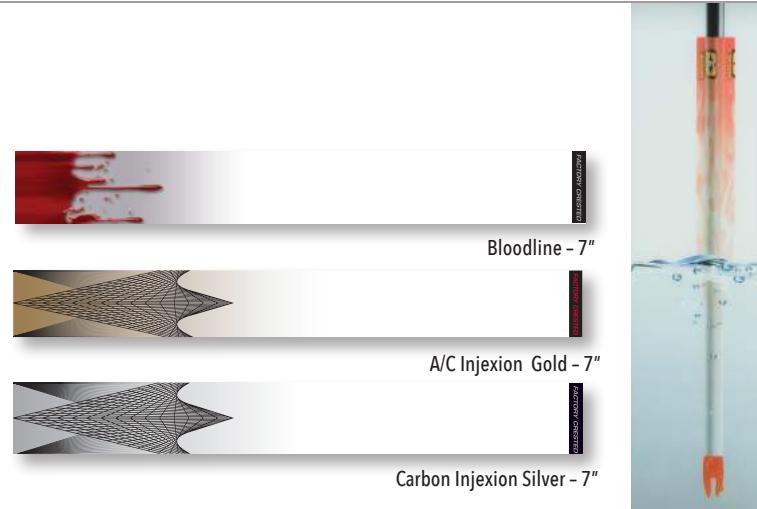

VANES & FEATHERS

BTV™ CROSSBOW VANES

- Height and profile designed specifically for high-powered crossbows
- Stiffening ridge cuts flutter at high speeds
- Increases accuracy and tightens broadhead groups



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	● Fire Orange ○ Bright Green ○ Yellow	● Red ○ White

All weights are within ±0.5 grain.

DIAMOND VANES®



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	○ Bright Green	● Fire Orange
235	2.375	.375	4	○ Sunset Gold	○ White
280	2.875	.500	6	○ Yellow	● Black
380	3.875	.500	8	○ Hot Pink	

All weights are within ±0.5 grain.

XPV™ VANES - High performance for broadhead use



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6	● Fire Orange ○ Hot Pink ○ Bright Green ○ Blue	● Red ○ Yellow ○ White ○ Indigo
				○ Red ○ Yellow ○ White ○ Indigo	100-count bag 500-count box

All weights are within ±0.5 grain.

TITE FLIGHT™ VANES - Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
175	1.750	.375	3	○ Bright Green	● Fire Orange
200	2.000	.330	4	● Black ○ Hot Pink ○ White	○ Hot Pink ○ White

All weights are within ±0.5 grain.

FEATHERS



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
3.0 R	3.000	.400	1.3	○ Yellow FL	● Brown
4.0 R	4.000	.550	2.8	○ Chartreuse	○ Yellow
5.0 R	5.000	.600	4.5	● Red ○ White ○ Green ○ Orange	● White ○ Green ○ Orange

All weights are within ±0.5 grain.

QUIVERS


ELITE FIELD QUIVER

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release style buckle for secure operation and positive engagement
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors*: Red, Blue, Grey, Carbon Black, and White




ELITE QUIVER BELT

- Sizes: One size fits most
- Innovative hook-and-loop adjustment
- Quick-release style buckle
- Included with Elite quivers—also sold separately
- Colors: Red, Blue, Grey, Carbon Black, and White




ELITE RELEASE POUCH

- Sizes: One size fits most



ELITE HIP QUIVER**

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release style buckle for secure operation and positive engagement
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors*: Red, Blue, Grey, Carbon Black, and White



DELUXE FIELD QUIVER

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch and belt sold separately
- Colors: NEW Flo-Green, NEW Teal, Silver, Green, Red, Blue, Purple, and Realtree™ Xtra



NEW



DELUXE QUIVER BELT

- Sizes: One size fits most
- Innovative hook-and-loop adjustment
- Easy On/Off T-Buckle connection



DELUXE RELEASE POUCH

- Sizes: One size fits most



NEW



DELUXE HIP QUIVER

- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Attached upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch and belt sold separately
- Colors: NEW Flo-Green, NEW Teal, Silver, Green, Red, Blue, Purple, and Realtree™ Xtra



* All colors available in right and left handed models

QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: NEW Flo-Green, NEW Teal, NEW Lost Camo XD™, Black, Red, Blue, Pink, Purple, and Realtree Xtra®

 REALTREE LOSTCAMO/XD

NEW



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: NEW Flo-Green, NEW Teal, NEW Lost Camo XD™, Black, Red, Blue, Pink, Purple, and Realtree Xtra®

 REALTREE LOSTCAMO/XD

NEW



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: NEW Flo-Green, NEW Teal, NEW Lost Camo XD™, Black, Red, Blue, Pink, Purple, and Realtree Xtra®

 REALTREE LOSTCAMO/XD

NEW



REPLACEMENT FLIPSIDE ARROW TUBE



REPLACEMENT BELT CLIP



RANGELITE™ HIP QUIVER

- Lightweight design
- Molded shank and arrow separator
- Easy-access pockets
- Top pocket for releases, pens or smart phones
- Available in right or left hand configurations
- Internal pocket dividers
- Colors: Silver, Red, Blue, Pink, and Realtree Xtra®

 REALTREE XTRA



BOW CASES

ELITE™ 4717 DOUBLE BOW CASE

- Two full-size target bow compatible
- Inside dimensions 46" x 16"
- Case-cube compatible double-fleece main compartments
- Double or single bow with opposite side clothing storage
- Dense EVA foam 360° exterior padding
- Re-positionable Velcro bow anchor system
- Six interior and exterior accessory pockets
- Compatible with Easton arrow tote
- The best YKK® reverse coil double zipper pulls
- Shoulder strap included
- Available in Pro Tour Black/Grey/Orange

NEW

WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with the Easton Deluxe Hip and Field quivers
- Dense 360° exterior padding and NEW corner cam padding
- Re-positionable Velcro bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: Flo-Green, Teal, Red, Black, Blue



NEW

WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers and maximum inside storage
- 8 interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable Velcro bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: Teal/Grey, Realtree® Xtra, Olive/Grey, and Lost® Camo XD

REALTREE
LOSTCAMO/XD



DELUXE 4517 BOW CASE & 4517 LADIES BOW CASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear
- Compatible with all Easton arrow tote and arrow case models
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (case cubes sold separately)
- Fits most bows – interior dimensions 44" x 16"
- Movable bow-anchoring straps for rock-solid bow security
- 360° padding for complete bow protection
- Elastic arm band with adjustable cord locks
- Colors: Black, Realtree® Max-1/Lavender, Lost® Camo, Realtree® Xtra, and Realtree® Max-1

REALTREE
LOSTCAMO



NEW

BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers and maximum inside storage
- 4 interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: Olive/Grey, Lost® Camo XD, Teal/Grey, and Realtree® Xtra

REALTREE
LOSTCAMO/XD



FLATLINE™ 4417

- Sleeve-style bow case for maximum protection and space saving compact size
- Compatible with all Easton arrow tote and arrow case models
- Premium oversized #10 zippers with easy grab pulls
- Fits most bows and arrow cases; interior dimensions of 43" x 16"
- Two exterior and one interior accessory pockets for release aids, range finders, tools or other archery essentials
- Colors: Black, Lost® Camo, Realtree® Xtra, and Realtree® Max-1

REALTREE
LOSTCAMO



BOW CASES

GENESIS® 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Lost® Camo, Pink, and Black

 REALTREE  LOST CAMO



NEW

MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: Flo Green/Blue, Pink/Yellow, Black/Grey, Grey/Red, Realtree Max1®, Realtree Xtra®, and Lost® Camo XD

 REALTREE  LOST CAMO/XD



NEW

CROSS-GO™ 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs.
- Overall dimensions 41" long x 26" wide
- 360° padded soft sided case with 3 interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton crossbow arrow tote
- Colors: Olive/Grey



ELITE 4716 & 4416 DOUBLE ROLLER BOW CASE

- Two full-size target bow compatible
- Three field-replaceable roller bearing wheels
- Available in two sizes (47" Lx16" Wx10" H) and (44" Lx16" Wx10" H) outside dimensions
- Double-walled protection – composite armor shield + foam 360° exterior padding
- Case-cube compatible double fleece main compartment
- Double seatbelt system to securely anchor bows
- Padded internal divider blanket for layered storage
- Five interior accessory pockets, adjustable padded walls
- Three expanding outside luggage compartments
- Four exterior accessory pockets
- The best YKK® reverse coil double zipper pulls
- Compatible with Easton arrow tote
- Airline Travel cover recommended (sold separately)
- Available in Pro Tour Black/Grey/Orange



DELUXE 3915 & 3615 COMPOUND/RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36" Lx15" Wx9" H) and (39" Lx15" Wx9" H)
- Compatible with the Easton Deluxe 33" & 36" arrow cases
- Case-cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Airline travel cover recommended (sold separately)
- Color: Black/Orange



DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe molded crossbow arrow case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Compatible with both standard and reverse limb crossbows
- Includes one corner case cube pocket
- Inside dimensions 41" x 26"
- Color: Black/Orange



BACKPACKS

ELITE™ RECURVE BACKPACK

- 6061-T6 aluminum internal frame suspension for easy carrying of heavy loads
- Fits up to 27" recurve handles and long limbs
- Collapsible stabilizer sleeve & arrow tote
- External, cinch-able tripod pocket
- Privacy mesh pocket for business cards
- High-denier nylon construction
- Cinch straps for total load security
- Arrow tote included
- Universal rain cover (included)



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items.
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with a modern sophisticated design
- High-denier ballistic POLY fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: NEW Teal, NEW Flo-Green, Grey, Blue, Red, and Black

NEW



10-RING™ TEAM-COLOR BACKPACK

- 1700 cubic inch/27 liter
- Bellowed front pocket
- Twin stretch hydration pockets
- YKK® zippers
- Hydration System compatibility
- Nylon 420D construction
- Colors: Black, Green, Blue/Red, Red/Yellow, Blue/Yellow, and Red/White



720 TEAM-COLOR BACKPACK

- Hydration System compatibility
- Durable Nylon 420D construction
- YKK® quality zippers
- Packs into itself for easy transport
- Integrated seat pad
- 1100 cubic inches, 18 liter capacity
- Colors: Red/White, Blue/Yellow, Black, Red/Yellow, Blue/Red, and Green



TECH TRAVELER™ BACKPACK

- Durable 1680D ballistic nylon
- Heavy-duty construction for daily use—extreme travel rated
- TSA-friendly laptop storage allows for easy security checks
- Fleece-lined key, glasses, and passport storage pockets
- Nine internal pockets
- Four huge exterior pockets
- Perfect for the traveler and student
- Headphone/charging and cord port
- Color: Grey



BOWCASE ACCESSORIES

CASE CUBES BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



ROLLER BOWCASE TRAVEL COVERS

- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot



BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all bowcases



STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length



NEW


STAY SHARP BROADHEAD CASE

- Patent-pending design ensures broadhead sharpness by supporting ferrules without contacting blades
- Hold 6 mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking Polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads




DELUXE ARM GUARDS

- Progressive designs molded from durable poly-carbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and bone configurations
- Colors: Blue, Red, Yellow, and Smoke

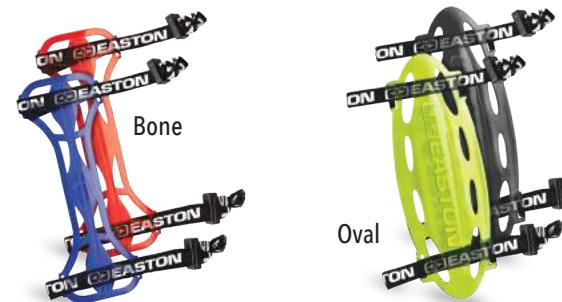

STIFF SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: Black



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL and XXL
- Color: Black/White

DELUXE PARACORD DIAMOND SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange



DELUXE NEOPRENE WRIST SLINGS

- Durable, lightweight neoprene construction
- Easy-adjust strap
- Designs: Diamond Plate, Elk, and Arrow/Whitetail



PROTOUR GEAR

EASTON TEAM JERSEY



COMPRESSION SHIRTS

- Four-way stretch breathable fabric
- Layer under shooter jerseys or hunting clothing
- Wicks moisture
- Compression comfort
- Sizes: S-XXL



PRO TOUR™ SUNGLASSES



PRO-TOUR™ VISORS



SHOOTER



FITTED SHOOTER



EASTON BUCKET



BLUE STONE

ORANGE STREAK

- Mens: S-3XL



EDGE

- Mens: S-3XL



SHOOTER TOWEL

PRO TOUR™ JACKET AND VEST

- Soft-shell tech fabric
- Micro fleece lining
- Sizes: S-XXL



USING THE TARGET ARROW SELECTION CHART


- Once you have determined your *Correct Target Arrow Length* and *Calculated or Actual Peak Bow Weight*, you are ready to select your correct shaft size:
 - Compound bows.** In the "Calculated Peak Bow Weight" column (left-hand side of the chart), select the column with the type of cam on your bow. Locate your *Calculated Peak Bow Weight* in that column.
 - Recurve bows and Modern Longbows.** In the "Recurve Bow Weight" column (right-hand side of the chart), select the column with the bow type. Next, locate your *Actual Peak Bow Weight* in that column.
- Move across that bow-weight row horizontally to the column indicating your *Correct Arrow Length*. Note the letter in the box where your *Calculated or Actual Peak Bow Weight* row and *Correct Target Arrow Length* column intersect. The "Shaft Size" box below the chart with the same letter contains your recommended shaft sizes. Select a shaft from the chart depending on the shaft material, shaft weight, and type of shooting you will be doing.

SELECTING THE CORRECT TARGET SHAFT SIZE


Our Target Shaft Selection Chart will help you find the perfect shaft match for your bow—quickly and easily. Advanced, interactive Spine Weight Comparison and Target Shaft Selection Charts are now available online at www.eastonarchery.com

1. Determining Correct Target Arrow Length

The *Correct Arrow Length* for bows (including bows with overdraws) is determined by drawing an extra-long arrow to full draw and having someone mark the arrow one inch in front of where the arrow contacts the most forward portion of the arrow rest.

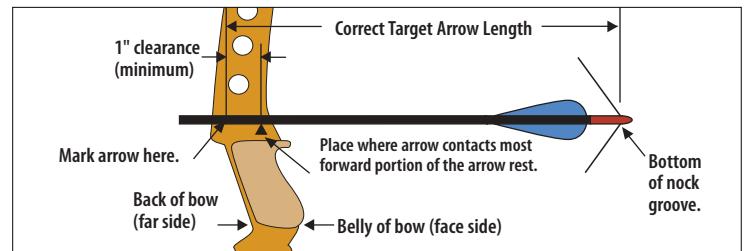

Bow Draw Length. Draw length is measured at full draw from the bottom of the nock groove to the back (far side) of the bow. Actual arrow length and draw length are only the same if the end of the arrow shaft is even with the back of the bow (far side) at full draw.

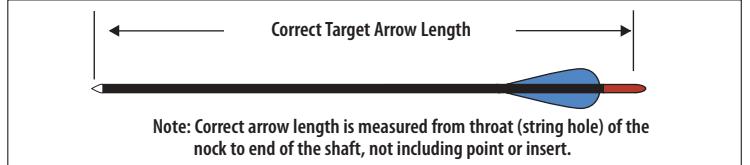

2. Determining Actual Peak Bow Weight Compound Bows

Compound bows must be measured at the peak bow weight as the bow is being drawn and not while letting the bow down.

The suggested shaft sizes in the charts were determined using a "Standard" Setup which includes:

- Use of a release aid
- Compound bow with brace height greater than 6 1/2"

If your setup differs from the "Standard" Setup, use the **Variables** (following) to make adjustments to determine the *Calculated Peak Bow Weight* so the correct arrow size can be selected on the chart.

Variables to the "Standard" Setup for Compound Bows

- Point weight over 100 grains—Add 3 lbs. for each 25 grains heavier than 100 grains.
- Bows with brace heights less than 6 1/2"—Add 5 lbs.
- Finger release—Add 5 lbs.

Overdraw Compound Bows

If you are using an overdraw, make the variable calculations (if any), and then modify the *Calculated Peak Bow Weight* of your bow using the chart below.

Length of Overdraw

For 50#-70# Actual/Calculated Peak Bow Weight, add to bow weight –

1"	2"	3"	4"	5"
1#	3#	6#	9#	12#

3. DETERMINING ACTUAL PEAK BOW WEIGHT RECURVE AND MODERN LONGBOWS

Your local archery pro shop is the best place to determine the actual draw weight of your bow. *Actual Peak Bow Weight* for recurve bows and longbows should be measured at your draw length.

LOW POUNDAGE RECURVE BOW

Bow Weight—lbs. Finger Release

21"	22"	23"	24"	25"	26"	27"
16-20 lbs. (7.3-9.1 kg)	Y1	Y1	Y2	Y3	Y4	Y4
20-24 lbs. (9.1-10.9 kg)	Y1	Y1	Y2	Y3	Y4	Y5
24-28 lbs. (10.9-12.7 kg)	Y1	Y1	Y2	Y3	Y4	Y6
28-32 lbs. (12.7-14.5 kg)	Y1	Y2	Y3	Y4	Y5	Y7
32-36 lbs. (14.5-16.3 kg)	Y2	Y3	Y4	Y5	Y6	Y7
36-40 lbs. (16.3-18.1 kg)	Y3	Y4	Y5	Y6	Y7	

Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.

YOUR ARROW LENGTH

Size	Spine	Model	Weight Grs/Inch	Size	Spine	Model	Weight Grs/Inch
Group Y1				Group Y2			
2000	2.000	Carb1	3.4	1800	1.800	Carb1	3.6
2000	2.000	Apollo	3.4	1800	1.800	Apollo	3.6
2000	2.000	Inspire	3.4	1800	1.800	Inspire	3.6
1214	2.501	75	5.9	1413	2.036	75	5.9
Group Y3				Group Y4			
1600	1.600	Carb1	3.8	15020	1.500	A/C/G	4.7
1600	1.600	Apollo	3.8	2-00	1.500	A/C/C	4.7
1600	1.600	Inspire	3.8	1400	1.400	Carb1	4.2
1416	1.684	75	7.2	1400	1.400	Apollo	4.2
				1400	1.400	Vector	3.9
				1416	1.684	75	7.2
Group Y5				Group Y6			
1250	1.250	A/C/E	5.1	1250	1.250	A/C/E	5.1
1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
3L-00	1.300	A/C/C	5.1	3-00	1.150	A/C/C	5.5
1200	1.200	Apollo	5.5	1150	1.200	Carb1	5.0
1200	1.200	Inspire	7.2	1200	1.200	Apollo	5.5
1400	1.400	Vector	3.9	1200	1.200	Inspire	7.2
1514	1.379	X7	6.8	1000	1.000	Vector	5.0
1516	1.403	75	7.3	1516	1.403	75	7.3
				1614	1.403	X7	7.7
Group Y7				KEY			
1000	1.000	A/C/E	5.7	A/C/E	Aluminum/Carbon/Extreme		
1100	1.100	A/C/G	5.1	X10	X10 Shafts (Aluminum/Carbon)		
1000	1.000	X10	5.3	A/C/G	A/C/G (Aluminum/Carbon)		
1000	1.000	A/C/G	5.7	A/C/C	Aluminum/Carbon/Composite		
3-00	1.150	A/C/C	5.5	Carb1	Carbon One N-FUSED® Carbon		
1000	1.000	Carb1	5.0	Apollo	Carbon Apollo		
1070	1.070	Apollo	5.9	Inspire	Carbon Inspire		
1000	1.000	Inspire	7.2	Vector	Carbon Vector		
1000	1.000	Vector	5.0	X7	X7 Eclipse (7178 alloy)		
1614	1.153	X7	7.7	75	XX75: Platinum Plus, Tribute, Jazz and Neos (7075 alloy)		

Note: To determine weight at your shaft length, multiply the grains-per-inch (gpi) by your actual shaft length not including point, insert, or UNI Bushing.

ARROW SELECTION

COMPOUND BOW

– Release Aid Calculated Peak Bow Weight–lbs

Bow Rating up to 275 FPS	Bow Rating 276–300 FPS	Bow Rating 301–320 FPS	Bow Rating 321–340 FPS	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	Bow Weight–lbs. Finger Release
29–35 lbs. (13.2–15.9 kg)				00	01	02	03	T1	T2	T3				21–27 lbs. (9.5–12.2 kg)
35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)			01	02	03	T1	T2	T3	T4	T5			27–32 lbs. (12.2–14.5 kg)
40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)	35–40 lbs. (15.9–18.1 kg)	02	03	T1	T2	T3	T4	T5	T6	T7		32–36 lbs. (14.5–16.3 kg)
45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	40–45 lbs. (18.1–20.4 kg)	03	T1	T2	T3	T4	T5	T6	T7	T8	T9	36–40 lbs. (16.3–18.1 kg)
50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	45–50 lbs. (20.4–22.7 kg)	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	40–44 lbs. (18.1–20.0 kg)
55–60 lbs (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	50–55 lbs. (22.7–24.9 kg)	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	44–48 lbs. (20.0–21.8 kg)
60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	55–60 lbs. (24.9–27.2 kg)	T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	48–52 lbs (21.8–23.6 kg)
65–70 lbs (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	60–65 lbs. (27.2–29.5 kg)	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	53–57 lbs (24.0–25.9 kg)
70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	65–70 lbs. (29.5–31.8 kg)	T5	T6	T7	T8	T9	T10	T11	T12	T13	T13	58–62 lbs. (26.3–28.1 kg)
76–82 lbs (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	70–76 lbs. (31.8–34.5 kg)	T6	T7	T8	T9	T10	T11	T12	T13	T13	T14	63–67 lbs. (28.6–30.4 kg)
82–88 lbs. (37.2–39.9 kg)	76–82 lbs (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	76–82 lbs. (34.8–37.2 kg)	T7	T8	T9	T10	T11	T12	T13	T13	T14		68–73 lbs. (30.8–33.1 kg)

For ATA Speed of 341–350 FPS: Start in 321–340 FPS column, drop down one row in chart Examples: 62lb–31in–345 FPS: drop down one row, still in Group T13 52lb–28in–345 FPS: drop down one row, shift from Group T8 to Group T9

YOUR ARROW LENGTH FOR TARGET • FIELD • 3D

For ATA Speed of 351+ FPS: Start in 321–340 FPS column, drop down two rows in chart. Examples: 62lb–31in–355 FPS: drop down two rows, shift from Group T13 to Group T14 52lb–28in–355 FPS: drops down two rows, shift from Group T8 to Group T10

Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch
Group 00															
1800	1.800	Carb1	3.6	2-00	1.500	A/C/G	4.7	1250	1.250	A/C/E	5.1	1100	1.100	A/C/E	5.1
1800	1.800	Apollo	3.6	1500	1.500	A/C/G	4.7	1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
1800	1.800	Inspire	3.6	1600	1.600	Carb1	3.8	3L-00	1.300	A/C/C	5.1	1400	1.400	Carb1	4.2
1214	2.501	75	5.9	1600	1.600	Apollo	3.8	1400	1.400	Carb1	4.2	1150	1.150	Carb1	5.0
1413	2.036	75	5.9	1600	1.600	Inspire	3.8	1400	1.400	Apollo	4.2	1200	1.200	Inspire	7.2
				1416	1.684	75	7.1	1400	1.400	Inspire	4.2	1200	1.200	Apollo	5.5
				1516	1.403	75	7.3	1400	1.400	Vector	3.9	1000	1.000	Vector	5.0
								1514	1.379	X7	6.8	1614	1.153	X7	7.7
Group T3															
*720-780R	0.720-0.780	A/C/E	6.4	*670-720R	0.670-0.720	A/C/E	5.9	*620-670R	0.620-0.670	A/C/E	6.1	*520-570R	0.520-0.570	A/C/E	6.3
*700-750R	0.700-0.750	X10	6.7	*650-700R	0.650-0.700	X10	6.8	*600-650R	0.600-0.650	X10	7.0	*500-550R	0.500-0.550	X10	7.5
720	0.720	ProTour	6.2	670	0.670	ProTour	6.5	620	0.620	ProTour	6.7	570	0.570	ProTour	6.9
*710-810R	0.710-0.810	A/C/G	6.5	*660-710R	0.660-0.710	A/C/G	6.9	*610-660R	0.610-0.660	A/C/G	7.3	*540-610R	0.540-0.610	A/C/G	7.7
3X-04	0.830	A/C/C	6.7	3L-04	0.750	A/C/C	7.0	3-04	0.680	A/C/C	7.2	3L-18	0.620	A/C/C	7.5
3L-04	0.750	A/C/C	7.0	660	0.660	Carb1	6.6	660	0.660	Carb1	6.6	600	0.600	Carb1	6.9
730	0.730	Carb1	6.0	660	0.660	Carb1	6.6	630	0.630	Inspire	7.9	570	0.570	Inspire	8.2
750	0.750	Inspire	8.1	630	0.630	Inspire	7.9	670	0.670	Apollo	7.7	610	0.610	Apollo	8.1
840	0.840	Apollo	6.5	740	0.740	Apollo	7.2	2013	0.610	75	9.0	500	0.500	LSpd	6.5
1813	0.874	75	7.9	1913	0.733	75	8.3	1914	0.658	X7	9.3	500	0.500	FB	7.1
1814	0.799	X7	8.6	1914	0.658	X7	9.3	1916	0.623	75	10.0	2013	0.610	75	9.0
1816	0.756	75	9.3					2014	0.579	X7	9.6	1916	0.623	75	10.1
Group T9															
*430-470R	0.430-0.470	A/C/E	7.0	*400-430R	0.400-0.430	A/C/E	7.5	*370-400R	0.370-0.400	A/C/E	7.9	370R	0.370	A/C/E	7.9
*410-450R	0.410-0.450	X10	8.5	*380-410R	0.380-0.410	X10	8.9	380R	0.380	X10	8.9	350R	0.350	X10	8.4
420	0.420	ProTour	8.0	380	0.380	ProTour	8.4	380	0.380	ProTour	8.4	340	0.340	ProTour	8.8w
*430-480R	0.430-0.480	A/C/G	8.9	3-39	0.440	A/C/C	8.6	3-39	0.390	A/C/C	8.8	3-60	0.340	A/C/C	9.5
3-39	0.440	A/C/C	8.6	3-39	0.390	A/C/C	8.8	375	0.375	FMJMatch	10.3	340	0.340	LSpd	8.2
450	0.450	FMJMatch	9.4	400	0.400	FMJMatch	10.0	400	0.400	LSpd	7.4	340	0.340	FB	8.3
450	0.450	Carb1	8.1	400	0.400	Carb1	8.5	400	0.400	FB	7.8	350	0.350	Triumph	
400	0.400	LSpd	7.4	410	0.410	Carb1	8.5	350	0.350	Triumph		290	0.290	SDRIVE 25	7.8
450	0.450	Triumph	7.4	400											

TARGET SHAFT MODELS

ALUMINUM SHAFT COMPONENT SPECIFICATIONS

Aluminum/Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes	
X10®	2	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 Pin	Pin Nocks X10 Overnock	±0.5 grains	±.0015"	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380, 350, 325	
X10® PROTOUT™	2	High-strength carbon fiber bonded to a precision 7075 alloy core tube –single-taper shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 or ProTour Pin	Pin Nocks	±0.5 grains	±.0015"	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380, 340	
A/C/E®	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft	A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015"	Polished Black Carbon	(1250, 1100) ⁵ , 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370	
A/C/C™	6	High-strength carbon fiber bonded to a precision 7075 alloy core tube	RPS Insert or Halfout Insert	One-piece Parabolic, NIBB, or RPS Point	UNI System	G Nock or Pin Nock	±0.5 grains	±.002"	Black, Micro-smooth Finish	2-00, 3L-00, 3-00, 2L-04, 2-04, 3X-04, 3L-04, 3-04, 3L-18, 3-18, 3-28, 3-39, 3-49, 3-60, 3-71	
TRIUMPH™	14	Alloy reinforced point end with multi-layer wrapped carbon fiber	N/A	Triumph One-Piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	500, 450, 400, 350	
A/C/G™	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube	A/C/E Insert	Screw-in, One-piece, A/C/E or A/C/G Stainless Steel Break-off	A/C/E & A/C/G Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grain	±.002"	Polished Black Carbon	1500, 1300, 1150, 1000, 880, 810, 710, 660, 610, 540, 480, 430	
FMJ MATCH™	14	High-strength carbon core bonded to a precision 7075 alloy jacket	A/C/E Insert	Screw-in, One-piece, A/C/E Stainless Steel Break-off	G Nock or G Pin Nock	G Nock	±2 grains	±.001"	Polished Silver finish	530, 490, 450, 400, 375	
Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ²	Color/Finish	Sizes	
CARBON ONE™	6	UltraLite carbon fibers	A/C/E Insert	Carbon One Stainless Steel Break-off	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±1 grains	±.003"	Black, Micro-smooth Finish	2000, 1800, 1600, 1400, 1150, 1000, 900, 810, 730, 660, 600, 550, 500, 450, 410	
APOLLO™	8	UltraLite carbon fibers	A/C/E Insert	Apollo One-Piece	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±2 grains	±.005"	Black, Micro-smooth Finish	2000, 1800, 1600, 1400, 1200, 1070, 950, 840, 740, 670, 610, 560	
FULL BORE™		SuperLite Carbon multi-layer wrapped fibers	N/A	One-piece Bullet	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	350, 270	
SUPERDRIVE 25™	10	Multi-layer wrapped Carbon fiber	N/A	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	290	
LIGHTSPEED 3D™ LIGHTSPEED™	16	SuperLite Carbon multi-layer wrapped fibers	CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.001" ±.003"	Black, Smooth-matte Finish	500, 400, 340	
FAT BOY™	10	Superlite Carbon multi-layer wrapped fibers	RPS Insert	One-piece or RPS Point	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340	
INSPIRE™	8	Small diameter protruded carbon	NA	Zinc One-piece Point	NA	G Nock or X Nock	NA	NA	Black, Smooth-matte Finish	2000, 1800, 1600, 1400, 1200, 1000, 900, 750, 630, 570	
Aluminum	Pg #	Aerospace Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
X23™ X27™	12	7178-T9	105,000	RPS Insert	NIBB, One-Piece Bullet or RPS Point	Super UNI System	3D Super, Super Nock or S Nock	±3/4%	+.001"	Diamond Polished Silver Anodized	2712, 2312, 2314, 2315
ECLIPSE™	12	7178-T9	105,000	Not Available	NIBB or One-piece Bullet	UNI or Super UNI System	3D Super Nock or G Nock	±3/4%	±.001"	Hard-Anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712
XX75 PLATINUM™ PLUS	18	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	UNI or Super UNI System	3D Super Nock or S Nock	±1%	±.002"	Hard-Anodized Platinum Grey	1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315
JAZZ™	18	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional or G Nock ⁶	±2%	±.005"	Hard-Anodized Purple/Silver	1214 ⁶ , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
TRIBUTE™	18	7075	90,000	RPS Insert 1716 & up	NIBB, One-Piece Bullet or RPS Point	Full-Diameter Taper Swag	Conventional or G Nock	±2%	±.005"	Hard-Anodized Black	1214 ⁶ , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
GENESIS™	16	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	N nock	±2.5 grains	±.005"	Hard-Anodized Bright Blue, Orange	1820
NEOS™	18	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008"	Hard-Anodized Gold	1618

1 Guaranteed straight to more stringent standards than ATA/ASTM methods.

2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.

3 Tensile strength value may vary ±3%.

4 Grains-per-shaft in a dozen bundle.

5 Special order only.

6 1214 size jazz uses direct-fit G Nock.

Edipse and Platinum Plus sizes in italics use UNI System and G Nock.

®™ Registered Trademark of Easton.

Size	Shaft Weight		Spine @ 28" Span		Stock Length ³		Conventional Nock Size ⁴		UNI System ⁵		NIBB Point	One-piece Bullet Point	RPS ⁷ Insert Alum.	RPS ⁷ Point Size		
	XX75 ¹		X7 ²		XX75 ¹		X7 ²		UNI Bushing ⁶							
	Grains per Inch		Deflection in Inches		Inches		Inches		Grains		Grains		Grains ⁸			
1214	5.9	—	2.501	—	26½	—	—	—	—	—	—	—	45	—		
1413	5.9	—	2.036	—	26	—	7/32	—	—	—	—	35	—	—		
1416	7.2	—	1.684	—	27	—	7/32	2	—	—	—	52	—	—		
1514	—	6.8	1.379	—	26½	—	5	—	—	—	—	61 ⁹	—	—		
1516	7.3	—	1.403	—	27½	—	1/4	3	—	—	—	48	—	54		
1614	—	7.7	1.153	—	28	—	—	—	5	—	—	51	—	—		
1616	8.4	—	1.079	—	28½	—	1/4	5	—	—	—	56	—	—		
1618	9.8	—	0.957	—	32½	—	1/4	—	—	—	—	50	—	—		
1713	7.4	—	1.044	—	29	—	—	7	—	—	—	54	—	—		
1714	—	8.1	0.963	—	29	—	—	7	—	—	—	56	—	—		
1716	9.0	—	0.880	—	29	—	1/4	7	—	—	—	60	—	10		
1813	7.9	—	0.874	—	30	—	1/4	8	—	—	—	56	—	14		
1814	—	8.6	0.799	—	29½	—	—	8	—	—	—	60	—	—		
1816	9.3	—	0.756	—	30	—	9/32	8	—	—	—	63	—	12		
1820	12.2	—	0.592	—	29½	—	9/32	—	—	—	—	59	—	—		
1913	8.3	—	0.733	—	31	—	9/32	9	—	—	—	64	—	18		
1914	—	9.3	0.658	—	30½	—	—	9	—	—	—	64	—	5/16		
1916	10.0	—	0.623	—	31	—	9/32	9	—	—	—	82	—	16		
201																

