



2011 | ARCHERY

carbonexpressarrows.com



Shoot Better with Carbon Express®

To gain the advantage in the field, you need the best equipment, which is why so many hunters insist on the Carbon Express brand. A year ago we created the Mayhem™ series, featuring K-360™ Weave Technology. This year we completely redesigned our top-of-the line Maxima® series arrows featuring the ALL NEW patented Dual Spine Weight Forward™ technology. Carbon Express – engineered to help you shoot better, every time.

BETTER > Innovation > Accuracy > Precision



INDEX

INTRODUCTION	2-10
Introduction	2
Index	3
Innovation	4-5
Precision	6-7
Accuracy	8-9
Features	10
HUNTING ARROWS	11-30
Maxima Hunter® KV	12
Maxima Hunter®	13
Maxima Blue Streak™	14
Maxima Blue Streak™ Select	15
Built-in Weight Forward™	16-17
Mayhem™ Hunter	18
Mayhem Hot Pursuit™	18
Mayhem™	19
PileDriver™ Hunter	20
PileDriver™	21
Mach 5™	22
Mutiny™	23
Predator™ II	24
Thunderstorm®	25
Heritage®	26
Flu Flu	27
Mathews® Edition - Maxima Hunter®	28
Mission® Edition - Terminator® Lite	29
Mission® Edition - Amped Youth Arrow	29
CX™ Aluminum	30
TARGET ARROWS	31-39
Nano-Pro™	32
Nano-XR®	33
Medallion™-Pro	34
Medallion™-XR	35
CXL™ Pro	36
X-Jammer-27™ Pro	37
LineJammer® Pro	38
Maxima Blue Streak™ Select	39
YOUTH ARROWS	40-44
Thunderstorm®	41
Predator™ II	42
Amped-XS	43
Thunder Express®	43
Amped-XS Golf Ball Flu Flu	44

BROADHEADS	45-55
F-15™ Dual Blade	46-47
Sabre™ XT Pro	48
Triloc® Pro	48
Assault LP 3-Blade	49
Quad Pro	49
XT 4-Blade	50
Nativ™ 100	50
Torrid™ 100	51
Torrid™ EXP	51
Torrid™ SS	51
Troika™ 100	52
Troika™ 125	52
Troika™ Lite 75	53
Troika™ ST3	53
Mayhem™ EXT	54
Shocker®	54
Broadhead Comparison Chart	55
ACCESSORIES	56-61
Lazer Eye™ Lighted Nocks	57
Peep Sight	58
String Silencer	58
String Loop	58
Nocking Point	59
Cam Kisser Button	59
Express Bond™ Archery Glue	59
Electronic Digital Grains Scale	59
Carbra-Max™ Stabilizer	60
String Tracker	60
Pro Bow Square	61
String Loop Nocking Pliers	61
*Teflon® Universal Cable Slide	61
ARROW SELECTION GUIDE	62-78
Bow Draw Weight Chart	63
Hunting Arrow Shaft Guide	64
Target Arrow Shaft Guide	65
Nocks	66
Field Points	66
Target Points	67
Parabolic Points	67
Arrow Component Guide	68-78

©2010 by Eastman International

*Teflon® is a registered trademark of E.I. DuPont de Nemours and Company.

MAXIMA[®]
DUAL SPINEWEIGHT FORWARD[™]



3-in-1 Arrow: Speed,
Accuracy and Penetration

Mach5[™]
Lightning Speed



Ultimate Penetration

MUTINY[™]
Deadly Reliable

DREDATOR[™] 
Vicious Value

BETTER > Innovation

NEW from Carbon Express in 2011

NEW MAXIMA® SERIES

Taking it to the maximum

Carbon Express' premium arrow series, the Maxima®, is better than ever in 2011, with three new arrows to give you a total of four Maxima® series options. Now the most accurate arrows in the Carbon Express® line have gotten even better with the introduction of the new Maxima Blue Streak™ and Maxima Blue Streak™ Select arrows. To complete the Maxima® series, we're introducing a new Maxima Hunter® KV arrow with a layer of Kevlar® fiber that provides superior durability for maximum strength.

*Kevlar® is a registered trademark of E.I. DuPont de Nemours and Company.

NEW DUAL SPINE WEIGHT FORWARD™

Rapid recovery and guidance control for arrows

As the leader in engineering arrows that help you shoot better, Carbon Express has developed a new, patented Dual Spine Weight Forward™ spine system that delivers maximum accuracy and performance. Dual Spine Weight Forward™ technology arrows are engineered to make today's high-powered bows shoot better. It's offered exclusively on all Maxima® series arrows for 2011.

NEW THE MACH 5™

Our fastest arrow

The new vertical fiber construction Mach 5™ is the lightest arrow in the Carbon Express® line, delivering new levels of speed.

NEW MAYHEM HOT PURSUIT™

3-in-1 performance arrow for the female hunter

The new Mayhem Hot Pursuit™ is designed for the female hunter, starting with a BuffTuff® custom front-end design, leading to the pink label and white and pink fletching, finished with a pink BullDog™ nock collar.



MAXIMA CARBON EXPRESS

BETTER > Precision

It's a simple fact: arrows with consistent spines ensure tighter groupings down-range and make consistently better, more accurate shooters. Carbon Express® arrows have the most consistent spines in the industry. We're also the only brand that laser sorts its premium hunting shafts to ensure all the arrows in a set have the same spine tolerance. Guaranteed.

SPINE CONSISTENCY

Consistent spines are the #1 factor in arrow performance. It's why we use a tightly controlled, computerized manufacturing process and only the highest grades of carbon fiber for each shaft.

THE STRAIGHT STORY

We laser check each of our arrows' straightness to a remarkable 1/10,000 of an inch to make sure they meet the strictest straightness tolerances in the industry. Unlike most manufacturers, our straightness tolerances are maximum measurements, not merely averages.

MATCHED WEIGHT

To take consistent performance to an even higher level, we use a fully automated, electronic sorting system to precisely match the weight of each arrow in a boxed set.

SPINE SELECTED

Carbon Express' exclusive process unmatched in the industry, arrow spines are laser checked to 1/10,000 of an inch to insure each set of arrows are within the specific spine tolerance. Spine consistency is the #1 factor in arrow performance and tight groupings.

BETTER > Accuracy

DUAL SPINE WEIGHT FORWARD™

Rapid Recovery and Guidance Control

Our patented Dual Spine Weight Forward™ technology is a breakthrough in arrow design that delivers unparalleled accuracy and performance. The fusion of two different carbon materials creates 2 spines in 1 arrow resulting in rapid recovery and guidance control. All new Maxima® series arrows feature Dual Spine Weight Forward™ technology in 2011.

POWER STEERING



WEIGHT FORWARD™

- Heavier front end
- Superior accuracy



FRONT SPINE OF ARROW

- Maximizes forgiveness
- Stays on track better
- More consistent arrow groupings

Dual Spine Weight Forward™ keeps your arrow on the path you intend

Rapid Recovery

The material used to construct the back part of the arrow spine is stiffer and manages energy like a “shock absorber”, harnessing the power of today’s high-performance bows. This “shock absorber” design dramatically improves arrow recovery out of the bow making it shoot straighter and faster for more consistent, tighter arrow groupings.

Guidance Control

The material used to construct the front part of the arrow is heavier and more forgiving, guiding the arrow immediately upon release, providing “power steering” to put your arrows right where you want them.

Shoot better than ever with Dual Spine Weight Forward™ technology only from Carbon Express.



BACK SPINE OF ARROW

- Lighter and stiffer spine
- Harnesses energy
- Gets on track faster

DUAL SPINE WEIGHT FORWARD™

DUAL SPINE WEIGHT FORWARD™

Dual Spine Weight Forward™ technology is a breakthrough in arrow design that delivers unparalleled accuracy and performance. The fusion of two different carbon materials creates 2 spines in 1 arrow resulting in rapid recovery and guidance control.

BUILT-IN WEIGHT FORWARD™

Carbon Express' exclusive patented arrow design that gradually shifts weight to the front two-thirds of the arrow. The unique design incorporates a lighter, stiffer back end that dramatically improves recovery out of the bow and increases velocity for greater penetration and down-range accuracy.



BUFFTUFF®

Carbon Express' exclusive patented process that integrates a super strong outer layer to arrows, providing the world's toughest and quietest carbon arrow finish.

BUFFTUFF® PLUS

Carbon Express' exclusive patented process that integrates a 100% high modular carbon weave into the outer layer of an arrow for excellent strength and durability.



DIAMOND WEAVE

The flagship of Carbon Express' exclusive patented outer layer process made with 100% diamond weave carbon to provide the ultimate in stiffness and unparalleled spine consistency.

BULLDOG™ NOCK COLLAR

Carbon Express' exclusive feature that protects arrows from nock end impact damage. Created with aircraft grade aluminum, the BullDog™ nock collar is specifically designed to form fit over the outside of the back end of the arrow shaft, providing a barrier if struck by another arrow. The BullDog™ nock collar provides superior durability.



K-360™

Carbon Express' exclusive patented process that integrates 100% low modular carbon weave into the outer layer of an arrow for excellent strength and spine consistency.

HUNTING ARROWS



"I love my new Carbon Express® Mayhem arrows. They perform like no other arrow I've shot. It's like shooting 3 arrows in 1!"

Tiffany Lakosky
The Crush with Lee and Tiffany

"Tiffany and I demand the highest performance from our equipment. Carbon Express laser checks each arrow for straightness. I know once I sight in, I'm going to get the same consistent performance from every CX arrow in my quiver."

Lee Lakosky
The Crush with Lee and Tiffany



NEW MAXIMA HUNTER® KV

The Strongest Maxima® Arrow

Maxima Hunter® KV is the strongest arrow available on the market today. Made with a layer of Kevlar®, a synthetic fiber that is pound per pound five times stronger than steel. Maxima Hunter® KV offers hunters unsurpassed strength, durability and the greatest penetration within the Maxima® series. The Maxima Hunter® KV is the best hunting arrow in the market!

Constructed using patented Dual Spine Weight Forward™ technology.

DUAL SPINE WEIGHT FORWARD™

FEATURES

- Dual Spine Weight Forward™ – rapid recovery and guidance control
- Patented BuffTuff® Plus carbon weave construction – excellent strength and durability
- BuffTuff® – the world's toughest and quietest carbon arrow finish with Mossy Oak® Break Up™ pattern
- Blazer™ vanes – added velocity for precision broadhead performance
- BullDog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025 "
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.0025 "

* Kevlar® is a registered trademark of E.I. Dupont de Nemours and Company.

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50665	250/12 pack	8.9	0.394"	0.300"
50666	350/12 pack	9.8	0.330"	0.306"
FLETCHED WITH BLAZER™ VANES				
50667	250/12 pack	8.9	0.394"	0.300"
50668	350/12 pack	9.8	0.330"	0.306"
50669	250/6 pack	8.9	0.394"	0.300"
50670	350/6 pack	9.8	0.330"	0.306"



NEW MAXIMA HUNTER®

Maximum Speed and Accuracy

The Maxima Hunter® maintains its heritage and adds the benefits of Dual Spine Weight Forward™ technology. It is the most proven and reliable premium grade 100% carbon arrow in the Carbon Express® line. The precision design Maxima Hunter® series is faster and offers tighter tolerances than traditional carbon arrows. The Maxima Hunter® is the fastest camouflage arrow in the Carbon Express® line!

Constructed using patented Dual Spine Weight Forward™ technology.

DUAL SPINE WEIGHT FORWARD™

FEATURES

- Dual Spine Weight Forward™ – rapid recovery and guidance control
- Patented BuffTuff® Plus carbon weave construction – excellent strength and durability
- BuffTuff® – the world's toughest and quietest carbon arrow finish with Mossy Oak® Treestand™ pattern
- Blazer™ vanes for added velocity or Fusion™ vanes for precision broadhead performance
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025 "
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.0025 "

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50675	250/12 pack	8.0	0.417"	0.295"
50676	350/12 pack	8.9	0.337"	0.297"
50677	450/12 pack	9.7	0.298"	0.302"
FLETCHED WITH BLAZER™ VANES				
50690	250/6 pack	8.0	0.417"	0.295"
50691	350/6 pack	8.9	0.337"	0.297"
50692	450/6 pack	9.7	0.298"	0.302"
50685	250/12 pack	8.0	0.417"	0.295"
50686	350/12 pack	8.9	0.337"	0.297"
50693	250/36 pack (bulk)	8.0	0.417"	0.295"
50694	350/36 pack (bulk)	8.9	0.337"	0.297"
FLETCHED WITH FUSION™ VANES				
50680	250/6 pack	8.0	0.417"	0.295"
50681	350/6 pack	8.9	0.337"	0.297"
50682	450/6 pack	9.7	0.298"	0.302"



NEW MAXIMA BLUE STREAK™

Taking Accuracy to a New Level

Maxima Blue Streak™ is the most accurate shooting arrow in the entire Carbon Express® hunting arrow line. The Maxima Blue Streak™ is made with new Diamond Weave, an innovative carbon cross-weave material design that delivers better spine uniformity resulting in better accuracy. This is the best shooting arrow we have ever made for hunting, delivering the ultimate in performance and accuracy.

Constructed using our patented Dual Spine Weight Forward™ technology.

DUAL SPINE WEIGHT FORWARD™

FEATURES

- Dual Spine Weight Forward™ – rapid recovery and guidance control
- Patented Diamond Weave – unparalleled spine consistency
- Patented BuffTuff® Plus carbon weave – excellent strength and durability
- Blazer™ vanes – added velocity for precision broadhead performance
- BullDog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025 "
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.0025 "

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50650	150/12 pack	6.5	0.508"	0.284"
50651	250/12 pack	7.4	0.413"	0.290"
50652	350/12 pack	8.3	0.347"	0.295"
FLETCHED WITH BLAZER™ VANES				
50653	150/12 pack	6.5	0.508"	0.284"
50654	250/12 pack	7.4	0.413"	0.290"
50655	350/12 pack	8.3	0.347"	0.295"
50656	150/6 pack	6.5	0.508"	0.284"
50657	250/6 pack	7.4	0.413"	0.290"
50658	350/6 pack	8.3	0.347"	0.295"
50659	250/36 pack (bulk)	7.4	0.413"	0.290"
50660	350/36 pack (bulk)	8.3	0.347"	0.295"



NEW MAXIMA BLUE STREAK™ SELECT

Raising the Bar on Accuracy

Maxima Blue Streak™ Select is the arrow with the tightest specifications for straightness in the Carbon Express® hunting arrow line. This is the step-up version of our Maxima Blue Streak™ for the shooter who demands the best.

Constructed using patented Dual Spine Weight Forward™ technology.

DUAL SPINE WEIGHT FORWARD™


FEATURES


- Dual Spine Weight Forward™ – rapid recovery and guidance control
- Patented Diamond Weave – unparalleled spine consistency
- Patented BuffTuff® Plus carbon weave – excellent strength and durability
- Tiger Blazer™ vanes/Tiger arrow wraps – added velocity and greater visibility after the shot
- BullDog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.001 "
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.0025 "

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
FLETCHED WITH BLAZER™ VANES				
50645	250 White/6 pack	7.4	0.413"	0.290"
50646	250 Yellow/6 pack	7.4	0.413"	0.290"
50647	350 White/6 pack	8.3	0.347"	0.295"
50648	350 Yellow/6 pack	8.3	0.347"	0.295"

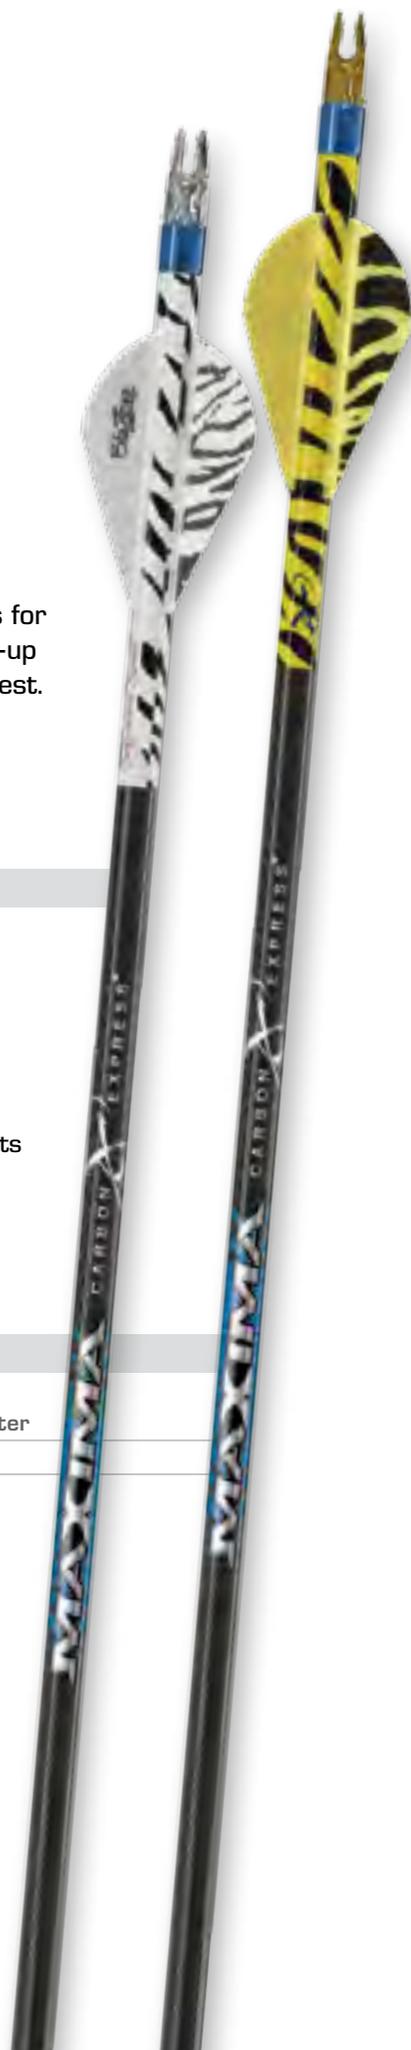

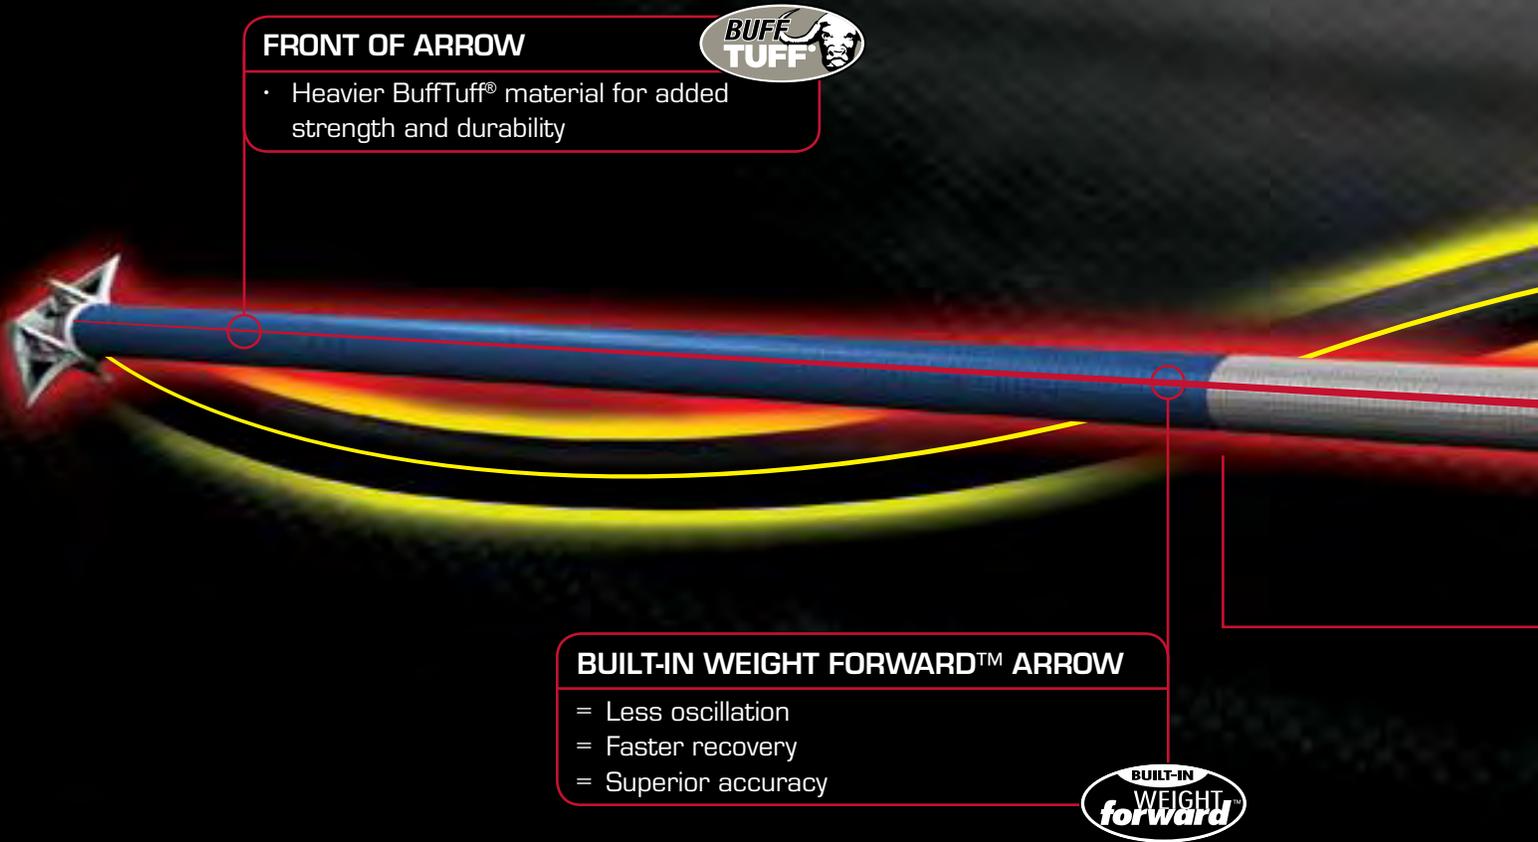

FRONT OF ARROW

- Heavier BuffTuff® material for added strength and durability



BUILT-IN WEIGHT FORWARD™ ARROW


- = Less oscillation
- = Faster recovery
- = Superior accuracy



BETTER > Accuracy

A Better Front of Center – Built-in Weight Forward™

For years, hunters and manufacturers alike have believed that shifting weight to the front of an arrow alone (front of center) was the way to increase down-range accuracy. At Carbon Express, we've literally turned this idea upside down with our innovative Built-in Weight Forward™ technology.

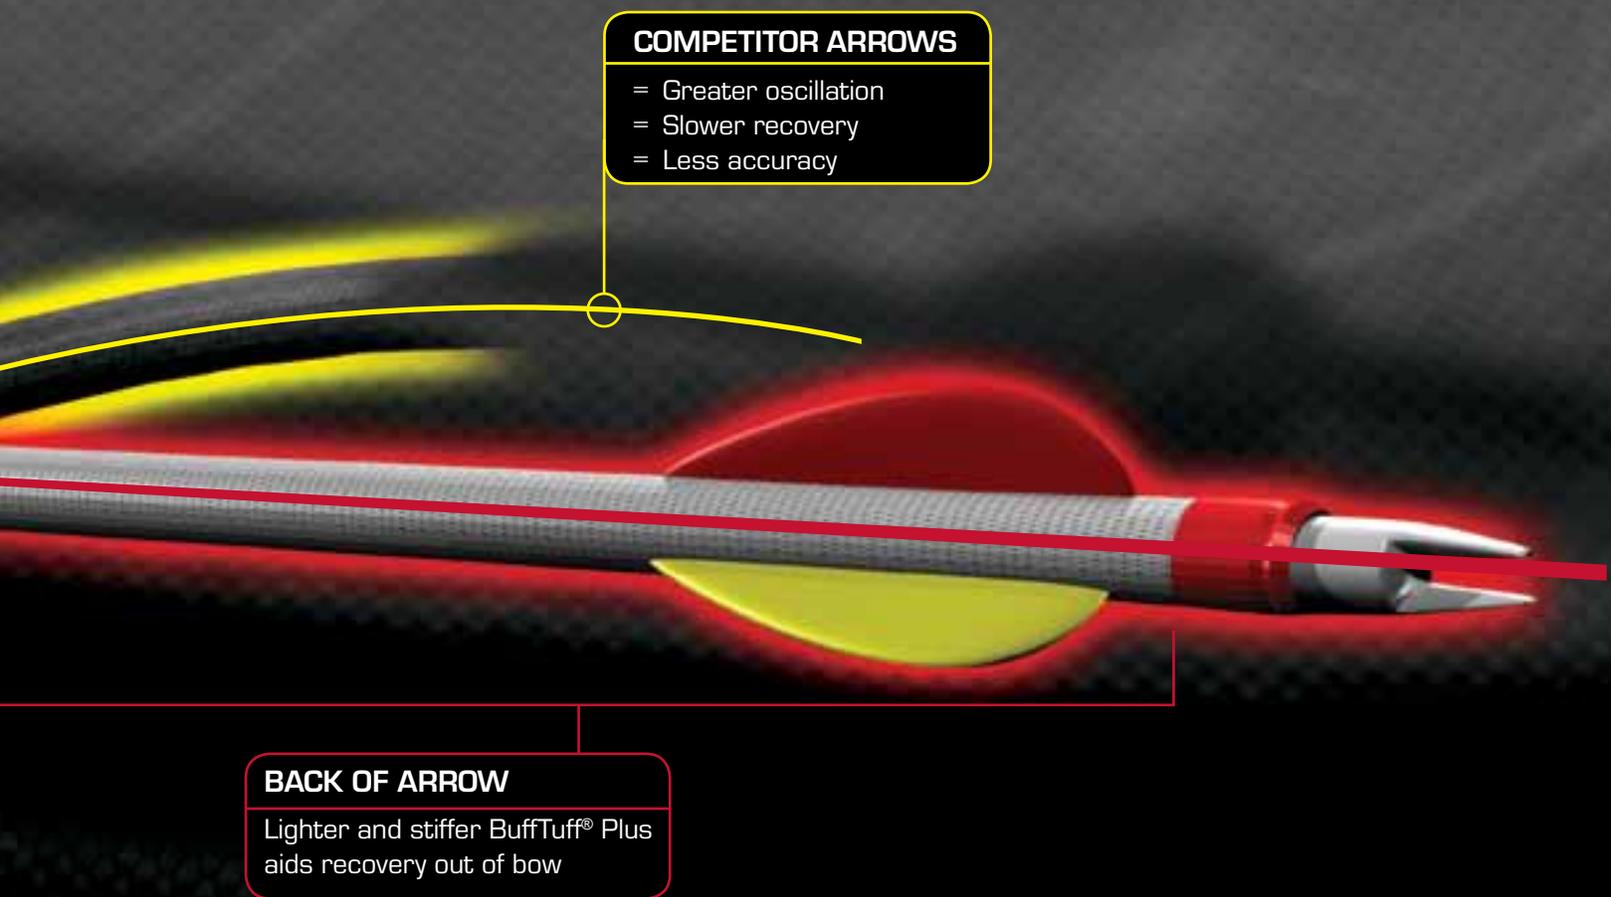

COMPETITOR ARROWS

- = Greater oscillation
- = Slower recovery
- = Less accuracy

BACK OF ARROW

Lighter and stiffer BuffTuff® Plus aids recovery out of bow

* Always use care when shooting any arrow.
BuffTuff® U.S. Patents: 6,520,876 6,866,599 and 7,201,818

The Built-in Advantage

Exclusive to Carbon Express, Built-In Weight Forward™ is a patented arrow design. It gradually shifts weight to the front two thirds of the arrow and uses a lighter and stiffer material in the back end. This unique Carbon Express® design and construction – the lighter stiffer back and front two-thirds weight shift – dramatically improves recovery out of the bow and increases velocity for greater penetration and accuracy.

MAYHEM™ HUNTER and NEW MAYHEM HOT PURSUIT™

3-in-1 Arrow:
Speed, Accuracy and Penetration

The Mayhem™ series is like 3 arrows in 1, engineered with our K-360°™ Weave Technology to provide 360° spine consistency and deliver the ultimate combination of speed, accuracy and penetration. The Mayhem™ Hunter also features our exclusive Carbon Express® Built-in Weight Forward™ technology for superior down-range accuracy with a broadhead. Equipped with Blazer™ or Fusion™ vanes for precise broadhead placement and Bulldog™ nock collars for added strength. We are setting a new standard for all-around hunting performance.

FEATURES

- Innovative Built-in Weight Forward™ technology – superior down range accuracy with a broadhead
- Patented K-360°™ Weave Technology – excellent strength and spine consistency for complete performance
- BuffTuff® – world's toughest carbon arrow finish in Mossy Oak® Obsession™ camouflage pattern
- Blazer™ vanes for added velocity or Fusion™ vanes for precision broadhead performance
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: $\pm 0.0035"$
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: $\pm 0.0025"$

MAYHEM™ HUNTER SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T1300	250/12 pack	8.9	0.418"	0.300"
T1301	350/12 pack	9.8	0.347"	0.303"
FLETCHED WITH BLAZER™ VANES				
T1242	250/12 pack	8.9	0.418"	0.300"
T1243	350/12 pack	9.8	0.347"	0.303"
T1304	250/36 pack (bulk)	8.9	0.418"	0.300"
T1305	350/36 pack (bulk)	9.8	0.347"	0.303"
T1323	250/6 pack	8.9	0.418"	0.300"
T1324	350/6 pack	9.8	0.347"	0.303"
FLETCHED WITH FUSION™ VANES				
T1302	250/6 pack	8.9	0.418"	0.300"
T1303	350/6 pack	9.8	0.347"	0.303"

MAYHEM HOT PURSUIT™ SPECIFICATIONS

SHAFT				
50622	150/12 pack	8.0	0.505"	0.294"
FLETCHED WITH FUSION™ VANES				
50623	150/6 pack	8.0	0.505"	0.294"
50624	150/36 pack (bulk)	8.0	0.505"	0.294"



MAYHEM™

3-in-1 Arrow: Speed, Accuracy and Penetration

The Mayhem™ offers the COMPLETE performance combination of speed, accuracy and penetration. The advanced design uses proprietary K-360°™ Weave Technology for remarkable strength and spine consistency, and most importantly, provides the most accurate arrow in its class. Featuring Blazer™ or Fusion™ vanes for added velocity along with Bulldog™ nock collars for improved durability.

FEATURES

- Patented K-360°™ Weave Technology – excellent strength and spine consistency for complete performance
- Blazer™ vanes for added velocity or Fusion™ vanes for precision broadhead performance
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: $\pm 0.0035"$
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: $\pm 0.0025"$

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T1248	250/12 pack	8.9	0.410"	0.299"
T1249	350/12 pack	9.8	0.334"	0.302"
FLETCHED WITH BLAZER™ VANES				
T1306	250/12 pack	8.9	0.410"	0.299"
T1307	350/12 pack	9.8	0.334"	0.302"
T1310	250/36 pack (bulk)	8.9	0.410"	0.299"
T1311	350/36 pack (bulk)	9.8	0.334"	0.302"
T1321	250/6 pack	8.9	0.410"	0.299"
T1322	350/6 pack	9.8	0.334"	0.302"
FLETCHED WITH FUSION™ VANES				
T1308	250/6 pack	8.9	0.410"	0.299"
T1309	350/6 pack	9.8	0.334"	0.302"



PILEDRIIVER™ HUNTER

Ultimate Penetration

The PileDriver™ series is engineered for the hunter who wants ULTIMATE penetration. The PileDriver™ Hunter is the heaviest arrow in the Carbon Express® line to create maximum kinetic energy and greater knock down power. Built-in Weight Forward™ technology delivers superior down-range accuracy while compact Predator vanes allow for extra arrow velocity.

FEATURES

- Innovative Built-in Weight Forward™ technology – superior down range accuracy with a broadhead
- BuffTuff® – world’s toughest carbon arrow finish in Mossy Oak® Brush™ camouflage pattern
- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.005"
- Weight tolerance: ± 1.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T1312	250/12 pack	10.4	0.402"	0.304"
T1313	350/12 pack	11.3	0.345"	0.308"
T1320	450/12 pack	13.6	0.300"	0.318"
FLETCHED WITH PREDATOR VANES				
T1314	250/6 pack	10.4	0.402"	0.304"
T1315	350/6 pack	11.3	0.345"	0.308"
T1316	250/12 pack	10.4	0.402"	0.304"
T1317	350/12 pack	11.3	0.345"	0.308"
T1318	250/36 pack (bulk)	10.4	0.402"	0.304"
T1319	350/36 pack (bulk)	11.3	0.345"	0.308"





PILEDRIIVER™

Ultimate Penetration

The PileDriver™ is designed with a high grains per inch ratio for increased kinetic energy and greater penetration. Heavier grains weight allows for exceptional stopping power and helps make the PileDriver™ remarkably durable and able to withstand the toughest hunting conditions. Compact Predator vanes allow for extra arrow velocity and increased accuracy down-range.

FEATURES

- Ultimate penetration – high grains per inch ratio creates increased penetration and exceptional stopping power
- Diamond-coat finish - provides smoother draw and stealth performance on an arrow rest
- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.005"
- Weight tolerance: ± 1.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T1256	250/12 pack	9.7	0.412"	0.298"
T1257	350/12 pack	10.4	0.345"	0.301"
FLETCHED WITH PREDATOR VANES				
T1258	250/6 pack	9.7	0.412"	0.298"
T1259	350/6 pack	10.4	0.345"	0.301"
T1260	250/36 pack (bulk)	9.7	0.412"	0.298"
T1261	350/36 pack (bulk)	10.4	0.345"	0.301"

NEW MACH 5™

Lightning Speed

The Mach 5™ is the lightest and fastest hunting arrow in the Carbon Express® line. The advanced 100% pure carbon construction delivers lightning speed ensuring tight pin gaps from 10 to 50 yards. The Diamond-coat finish provides greater durability and stealth performance on an arrow rest.

FEATURES

- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Diamond-coat finish – provides smoother draw and stealth performance on an arrow rest
- Tunable nocks – adjustable nocks for precision accuracy
- Straightness: ± 0.0025 " max.
- Weight tolerance: ± 1.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch*	Spine	Diameter
SHAFT				
50630	250/12 pack	7.0	0.404"	0.289"
50631	350/12 pack	8.1	0.331"	0.292"
FLETCHED WITH PREDATOR VANES				
50632	250/6 pack	7.0	0.404"	0.289"
50633	350/6 pack	8.1	0.331"	0.292"
50634	250/36 pack (bulk)	7.0	0.404"	0.289"
50635	350/36 pack (bulk)	8.1	0.331"	0.292"



MUTINY™

Deadly Reliable

The Mutiny™ is selectively engineered for higher velocity to create a flatter trajectory and increased accuracy. The advanced carbon composite design delivers greater consistency and exceptional durability. The Mutiny™ features Carbon Express' unique Diamond-coat finish that provides greater durability and a smoother, slicker surface for easy target removal.

FEATURES

- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Diamond-coat finish – provides smoother draw and stealth performance on an arrow rest
- Tunable nocks – adjustable nocks for precision accuracy
- Straightness: ± 0.003 " max.
- Weight tolerance: ± 2.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch*	Spine	Diameter
SHAFT				
T1329	150/12 pack	8.2	0.504"	0.284"
T1281	250/12 pack	8.5	0.404"	0.292"
T1282	350/12 pack	9.4	0.332"	0.297"
FLETCHED WITH PREDATOR VANES				
T1331	150/6 pack	8.2	0.504"	0.284"
T1283	250/6 pack	8.5	0.404"	0.292"
T1284	350/6 pack	9.4	0.332"	0.297"
T1333	150/36 pack (bulk)	8.2	0.504"	0.284"
T1285	250/36 pack (bulk)	8.5	0.404"	0.292"
T1286	350/36 pack (bulk)	9.4	0.332"	0.297"



PREDATOR™ II

Vicious Value

The Predator™ II is designed to offer outstanding strength, durability and high-powered performance perfect for the hunter searching for performance and affordability in a light weight arrow. The Predator™ II is a rugged carbon composite arrow certain to deliver impressive results. Predator™ II (2040 and 3050) series is perfect for light poundage bows with two spine offerings to fit 20-40 lb. bows and 30-50 lb. bows. Optimal sizes and weighting for young or beginner shooters.

FEATURES

- Multiple sizes – wide variety of spines ranging from 0.340" to 0.800" for use by experienced archers to youths with low poundage bows
- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Tunable nocks – adjustable nocks for precision accuracy
- Straightness: ± 0.006"
- Weight tolerance: ± 3.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
ADULT SHAFT				
T1175	4560/30"/12 pack	8.8	0.403"	0.293"
T1176	6075/31"/12 pack	9.7	0.344"	0.298"
ADULT ARROW FLETCHED WITH PREDATOR VANES				
T1254	4560/30"/36 pack (bulk)	8.8	0.403"	0.293"
T1255	6075/31"/36 pack (bulk)	9.7	0.344"	0.298"
YOUTH SHAFT				
T1275	700/30"/12 pack	6.3	0.700"	0.250"
T1276	800/30"/12 pack	7.5	0.800"	0.254"
T1250	2040/30"/12 pack	7.7	0.598"	0.280"
T1251	3050/30"/12 pack	8.3	0.505"	0.283"
YOUTH ARROW FLETCHED WITH PREDATOR VANES				
T1277	700/30"/36 pack (bulk)	6.3	0.700"	0.250"
T1278	800/30"/36 pack (bulk)	7.5	0.800"	0.254"
T1252	2040/30"/36 pack (bulk)	7.7	0.598"	0.280"
T1253	3050/30"/36 pack (bulk)	8.3	0.505"	0.283"

NOTE: All 700 and 800 spine arrows now come with half out inserts. Shafts have no inserts.



THUNDERSTORM®

Low Poundage Hunting Arrow

Thunderstorm® is an innovative carbon composite arrow designed for intermediate and low poundage shooters using 30 to 50 lbs. draw weights. It delivers high-performance with lightweight bows, even when shooting broadheads.

FEATURES

- Spined to fit the requirements of youth draw weights
- Adjustable nock for precision tuning and accuracy
- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T3002	29"/12 pack	8.3	0.499"	0.285"
FLETCHED WITH PREDATOR VANES				
T3021	29"/6 pack	8.3	0.499"	0.285"
T3020	29"/36 pack (bulk)	8.3	0.499"	0.285"



HERITAGE®

Tradition Meets Technology

The Heritage® arrow is designed for the hunter who wants the look and feel of classic cedar with the high-tech performance and toughness of carbon composite. This perfectly spined shaft is ideal for recurve or longbows.

FEATURES

- Patented BuffTuff® construction – the world's toughest and quietest carbon arrow finish
- Carbon composite construction for unsurpassed strength and durability
- Straightness: ± 0.005 " max.
- Weight tolerance: ± 2.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
W1413	75/12 pack	8.8	0.611"	0.288"
W1410	90/12 pack	9.4	0.530"	0.291"
W1402	150/12 pack	10.0	0.487"	0.300"
W1400	250/12 pack	11.0	0.373"	0.305"
W1401	350/12 pack	12.0	0.320"	0.309"



FLU FLU


Flu-Flu is the #1 choice for bird and small game hunters. Its carbon composite shaft offers excellent performance, strength and durability for a variety of shooting situations.

FEATURES

- Great for bird and small game hunting
- Carbon composite construction for unsurpassed strength and durability
- Offered with six 4" full feathers

SPECIFICATIONS

Model	Size/Qty
50502	4560/30" 1 pack
50501	6075/31" 1 pack
T4050	4560/30"/18 pack (bulk)
T4051	6075/31"/18 pack (bulk)

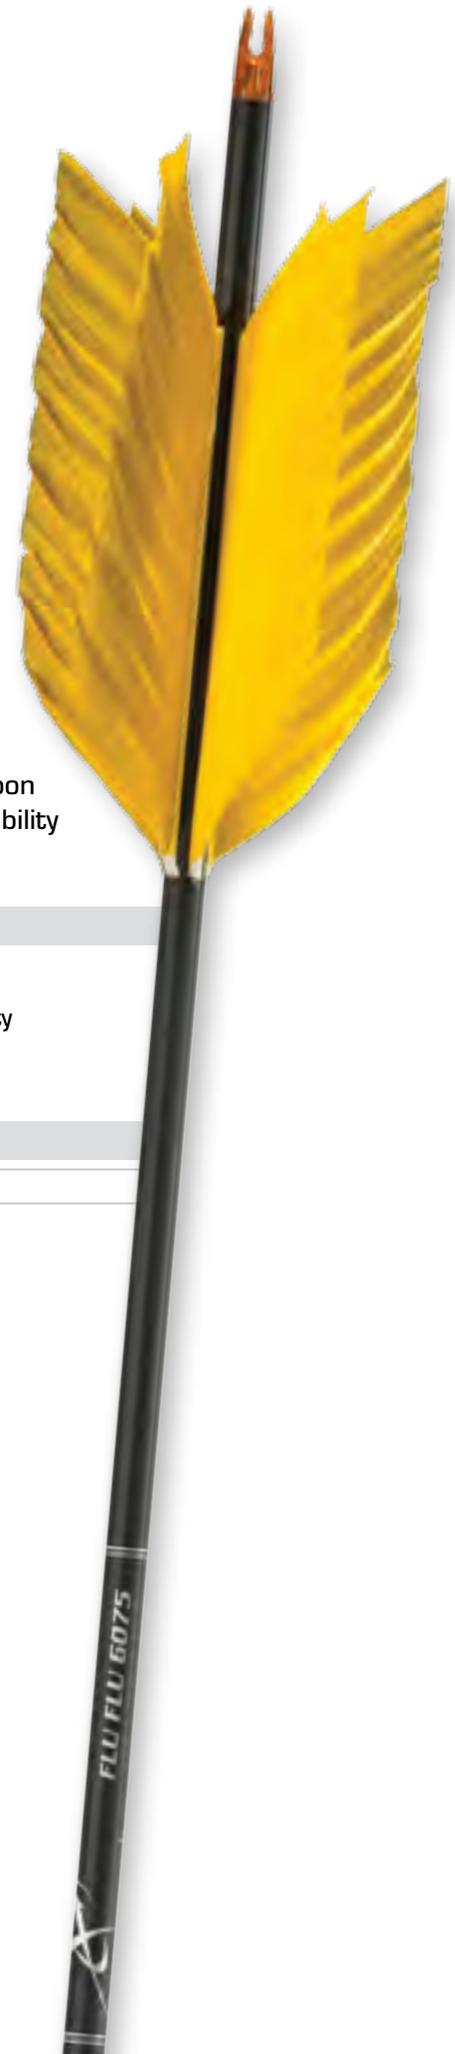

NEW MATHEWS® EDITION

Maxima Hunter®

The Mathews® Edition Maxima Hunter® is the most proven and reliable premium grade 100% carbon arrow in the Carbon Express® line. The precision design is faster and offers tighter tolerances than traditional carbon arrows. The Mathews® Edition Maxima Hunter® is the fastest camouflage arrow in the Carbon Express® line!

Constructed using patented Dual Spine Weight Forward™ technology.

* Mathews® edition shafts and arrows only available to authorized Mathews® dealers.

DUAL SPINE WEIGHT FORWARD™


FEATURES

- Dual Spine Weight Forward™ – rapid recovery and guidance control
- Patented BuffTuff® Plus carbon weave construction – excellent strength and durability
- BuffTuff® – the world's toughest and quietest carbon arrow finish with Mathew's® Lost Camo™ pattern
- Blazer™ vanes – added velocity for precision broadhead performance
- BullDog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025"
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.0025"

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50700	250/12 pack	8.0	0.417"	0.295"
50701	350/12 pack	8.9	0.337"	0.297"
FLETCHED WITH BLAZER™ VANES				
50702	250/12 pack	8.0	0.417"	0.295"
50703	350/12 pack	8.9	0.337"	0.297"

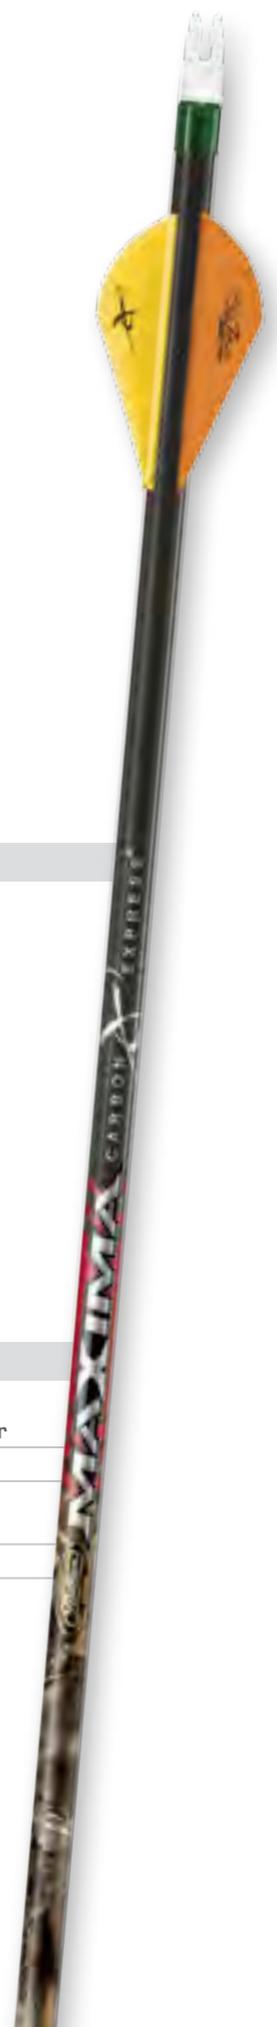

NEW MISSION® EDITION

Terminator® Lite

The Mission® Edition Terminator® Lite is a high-performance, high-value carbon composite hunting arrow with superior strength and straightness. Mission® Edition Terminator® Lite offers superior down-range accuracy.

* Mission® Edition shafts and arrows only available to authorized Mission® dealers.

FEATURES

- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Tunable nocks – adjustable nocks for precision accuracy
- Straightness: ± 0.004 " max.
- Weight tolerance: ± 1.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch*	Spine	Diameter
SHAFT				
50640	250/12 pack	8.3	0.399"	0.292"
50641	350/12 pack	8.9	0.335"	0.295"
FLETCHED WITH PREDATOR VANES				
50642	250/36 pack (bulk)	8.3	0.399"	0.292"
50643	350/36 pack (bulk)	8.9	0.335"	0.295"

NEW MISSION® EDITION

Amped - Youth Arrow

The Mission® Edition Amped composite arrow is designed for young and beginning archers looking for an arrow with an interchangeable point system. Designed for bow weights of 20-45 lbs.

* Mission® Edition shafts and arrows only available to authorized Mission® dealers.

FEATURES

- Dura™ vanes – for added durability and accuracy
- Composite shaft construction for extreme durability
- Standard screw-in inserts fit field points and broadheads
- Straightness: ± 0.006 " max.
- Designed for 20-45 lbs. bows

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty
ARROW	
52005	28"/36 pack (bulk)



CX™ ALUMINUM

The Original

The 7001-T6 alloy aluminum arrow is fully assembled with an insert and 4" vanes while also featuring tunable TCX nocks for greater accuracy.

FEATURES

- Aluminum arrows 7001-T6 alloy
- Tunable polycarbonate TCX nocks
- Tensile strength 88,000 PSI

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty
ARROWS	
A0401	30"/Black/2117/12 pack
A0403	31"/Black/2216/12 pack
A0401-3	30"/Black/2117/3 pack
A0403-3	31"/Black/2216/3 pack



"Carbon Express arrows are far more durable than any other arrow on the market. My Nano's consistently hold their initial spine so long that I have shot the same Nano Pro's for the past three seasons without losing accuracy! They are also weight matched and spin matched, which means 1 dozen arrows equals 1 dozen arrows, unlike most other manufactures. I truly feel Carbon Express makes the best carbon target arrows on the market and I have shot them all."

Dietmar Trillus

Carbon Express International Shooting Staff Director
 Winner 2010 World Archery Festival
 2008 FITA World Cup Winner
 2007 FITA Outdoor World 1st place winner



"If you want to shoot the best, shoot Carbon Express. Their arrows have the most consistent spines in the business. I am proud to be part of the Carbon Express Team."

Burley Hall


Carbon Express U.S. Shooting Staff Director

TARGET ARROWS

"I enter every tournament with confidence knowing I'm shooting the most technically advanced arrows on the market."

Camilla Soemod

Demark double Silver Medalist Mixed Doubles

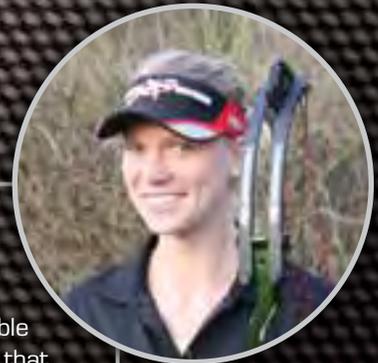

"Carbon Express is a very reliable and credible product, with tight tolerances and durability that make sure my groups stay tight and accurate. Right after I changed to CX, my scores went up and I had the best season of my archery career."

Martin Damsbo

3rd overall FITA World ranking
 1st place Danish Outdoor Nationals

"Quality craftsmanship and precision is why I rely on Carbon Express arrows to win."

Cara Fernandez

2010 IBO Pro Shooter of the Year
 2010 IBO Triple Crown Champion
 2010 ASA Classic Women's Open Pro Champion



"Consistent results are critical to my success. Carbon Express combines innovation, accuracy and precision to help me Shoot Better, every time."

Nathan Brooks

2010 1st IBO Texas
 2007 IBO National Champion
 2008 ASA Pro-Am, Texas

NANO-PRO™

FITA World Cup Champion

Nano-Pro™ is simply the best 100% carbon target arrow in the world! Designed for FITA, NAA and NFAA long-distance field shooting the Nano-Pro™ is engineered with incredibly light yet strong 46-ton carbon. Nano-Pro™ arrows recover even faster out of the bow than the Nano-XR® while delivering the flattest trajectory and superior down-range accuracy. It has the smallest diameter of any of our target arrows, nearly eliminating cross-wind drift.

Unlike aluminum core arrows, Nano-Pro™ arrows won't take a set (permanent) bend, consistently holding their initial spine tolerance for several seasons!

FEATURES

- Advanced technology, extreme accuracy
- Most durable, long lasting target arrows ever manufactured
- Straightness: ± 0.0015"
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.002"
- Each set is 100% weight and spine matched for guaranteed consistency

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50306	900/12 pack	5.3	0.900"	0.177"
50307	800/12 pack	5.7	0.800"	0.180"
50308	750/12 pack	6.0	0.750"	0.183"
50309	700/12 pack	6.2	0.700"	0.184"
50310	650/12 pack	6.4	0.650"	0.186"
50311	600/12 pack	6.8	0.600"	0.190"
50312	550/12 pack	7.1	0.550"	0.193"
50313	500/12 pack	7.5	0.500"	0.196"
50314	450/12 pack	8.0	0.450"	0.200"
50315	400/12 pack	8.6	0.400"	0.205"
50170	350/12 pack	9.5	0.350"	0.212"



NANO-XR®

FITA World Champion

Introduced in 2007, the Nano-XR® was the first target arrow engineered from 40-ton carbon to deliver superior down-range accuracy, strength and consistency shot after shot. Its ultra-small diameter dramatically reduces cross-wind drift and is the ideal arrow for FITA, NAA and NFAA long-distance shooting. In side-by-side tests, the Nano-XR® consistently out-performed comparable aluminum core carbon arrows in durability, recovery out of the bow, consistency and velocity.

FEATURES

- Advanced technology, extreme accuracy and durability
- Straightness: $\pm 0.0015"$
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: $\pm 0.002"$

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50107	1100/12 pack	4.9	1.110"	0.181"
50106	1000/12 pack	5.2	1.000"	0.184"
50118	900/12 pack	5.5	0.900"	0.186"
50117	830/12 pack	5.8	0.830"	0.189"
50116	730/12 pack	6.2	0.730"	0.191"
50115	680/12 pack	6.4	0.680"	0.194"
50114	630/12 pack	6.6	0.630"	0.196"
50113	580/12 pack	7.2	0.580"	0.201"
50112	530/12 pack	7.5	0.530"	0.203"
50111	490/12 pack	7.8	0.490"	0.205"
50110	450/12 pack	8.1	0.450"	0.208"
50109	410/12 pack	8.6	0.410"	0.212"
50108	380/12 pack	9.0	0.380"	0.214"



MEDALLION™-PRO

Laser Precision

The Medallion™ line of arrows features slim diameter technology designed for improved performance on long distance field shooting. The Medallion™-Pro is the flagship model for the series and features 30-ton carbon for enhanced performance, overall strength and improved recovery out of the bow – all together creating greater accuracy.

FEATURES

- Spine selection tolerance: ± 0.0025 " max.
- Weight tolerance: ± 1.0 grains
- Straightness: ± 0.002 "

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50416	1000/12 pack	5.0	1.000"	0.213"
50417	900/12 pack	5.3	0.900"	0.215"
50418	800/12 pack	5.7	0.800"	0.218"
50419	710/12 pack	6.0	0.710"	0.220"
50420	650/12 pack	6.5	0.650"	0.224"
50421	590/12 pack	6.9	0.590"	0.226"
50422	530/12 pack	7.3	0.530"	0.230"
50423	470/12 pack	7.8	0.470"	0.232"
50424	410/12 pack	8.5	0.410"	0.238"



MEDALLION™-XR

Aspiring Champions

The Medallion™-XR is the sister model to the Medallion™-Pro and incorporates 24-ton carbon in a slim diameter shaft for the aspiring target archer at a more economical price. The wide variety of spine offerings in this model works well with low poundage bows and even fits well with youth archers looking to become future FITA or Olympic champions.

FEATURES

- Spine selection tolerance: ± 0.0025 " max.
- Weight tolerance: ± 1.0 grains
- Straightness: ± 0.003 "

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
50413	2000/12 pack	5.1	1.110"	0.176"
50414	1800/12 pack	5.3	1.000"	0.177"
50401	1500/12 pack	6.4	1.900"	0.230"
50402	1300/12 pack	6.6	1.300"	0.232"
50403	1100/12 pack	4.6	1.100"	0.224"
50404	1000/12 pack	4.9	1.000"	0.226"
50405	900/12 pack	5.2	0.900"	0.228"
50406	800/12 pack	5.6	0.800"	0.230"
50407	700/12 pack	6.0	0.700"	0.233"
50408	600/12 pack	6.7	0.600"	0.239"
50415	500/12 pack	7.6	0.500"	0.244"



NEW CXL™ PRO

Line Cutter

The CXL™ Pro performs even better than its predecessors. The lightest line-cutting shaft in the Carbon Express® portfolio, its large diameter optimizes a shooter's ability to cut the line for a higher score. The CXL™ Pro is available in three sizes to fit all draw weights and meets all IFAA, NAA and FITA standards. Spine-selected for a consistent matched set.

FEATURES

- Patented Diamond Weave – unparalleled spine consistency
- BullDog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025 " max.
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.002 "

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
51510	150/12 pack	5.9	0.504"	0.348"
51511	250/12 pack	6.4	0.417"	0.350"
51512	350/12 pack	7.2	0.361"	0.354"



NEW X-JAMMER-27™ PRO

Wide Body

The X-Jammer-27™ Pro is engineered to be the ultimate indoor 20-yard spot target arrow. With a 27/64" diameter, X-Jammer-27™ Pro is the largest diameter target arrow in the Carbon Express® line. It also has the maximum diameter shaft allowed in most sanctioned tournaments. Features the Bulldog™ nock collar for added strength and protection.

FEATURES

- Patented Diamond Weave – unparalleled spine consistency
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025 " max.
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.002 "

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch*	Spine	Diameter
SHAFT				
51500	12 pack	7.5	0.297"	0.414"



NEW LINEJAMMER® PRO

Competition Proven

The LineJammer® Pro, the best-spined and weight shaft in its class, gets even stronger and better with the addition of our exclusive Diamond Weave technology. The high-performance LineJammer® Pro is competition-proven and offers maximum diameter line-cutting ability for ASA and IBO competition. Features the Bulldog™ nock collar for added strength and protection. Spine-selected for a consistent matched set.

FEATURES

- Patented Diamond Weave – unparalleled spine consistency
- BuffTuff® – the world's toughest and quietest carbon arrow finish
- Bulldog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.0025 " max.
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.002 "

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
51505	12 pack	7.0	0.358"	0.381"



NEW MAXIMA BLUE STREAK™ SELECT

Raising the Bar on Accuracy

Maxima Blue Streak™ Select is the arrow with the tightest specifications for straightness in the Carbon Express® arrow line. The Maxima Blue Streak™ Select is superbly engineered and a top choice for field and 3D archers.

Constructed using patented Dual Spine Weight Forward™ technology.

DUAL SPINE WEIGHT FORWARD™

FEATURES

- Dual Spine Weight Forward™ – rapid recovery and guidance control
- Patented Diamond Weave – unparalleled spine consistency
- Patented BuffTuff® Plus carbon weave – excellent strength and durability
- BullDog™ nock collar – unrelenting strength and durability for nock end impacts
- Straightness: ± 0.001 "
- Weight tolerance: ± 1.0 grains
- Spine selection tolerance: ± 0.002 "

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
51520	150/12 pack	6.4	0.508"	0.284"
51521	250/12 pack	7.4	0.413"	0.290"
51522	350/12 pack	8.3	0.347"	0.295"



YOUTH ARROWS

THUNDERSTORM®

Youth Arrow

Thunderstorm® is an innovative carbon composite arrow designed for intermediate and low poundage shooters using 30 to 50 lb. draw weights. It delivers high-performance with lightweight bows, even when shooting broadheads.

FEATURES

- Spined to fit the requirements of youth draw weights
- Adjustable nock for precision tuning and accuracy

SPECIFICATIONS

* Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T3002	29"/12 pack	8.3	0.499"	0.285"
FLETCHED WITH PREDATOR VANES				
T3021	29"/6 pack	8.3	0.499"	0.285"
T3020	29"/36 pack (bulk)	8.3	0.499"	0.285"



PREDATOR™ II

Youth Arrow

The Predator™ II is designed to offer outstanding strength, durability and high-powered performance. Predator™ II features optimal size and weighting for young or beginner shooters with four spine offerings to fit bows from 15-50 lbs. Equipped with compact Predator vanes for added velocity and an adjustable nock for precision tuning and accuracy.

FEATURES

- Predator vanes – high-performance compact design for added arrow velocity and greater accuracy
- Tunable nocks – adjustable nocks for precision accuracy
- Straightness: ± 0.006"
- Weight tolerance: ± 3.0 grains

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
SHAFT				
T1275	700/30"/12 pack	6.3	0.700"	0.250"
T1276	800/30"/12 pack	7.5	0.800"	0.254"
T1250	2040/30"/12 pack	7.7	0.598"	0.280"
T1251	3050/30"/12 pack	8.3	0.505"	0.283"
FLETCHED WITH PREDATOR VANES				
T1277	700/30"/36 pack (bulk)	6.3	0.700"	0.250"
T1278	800/30"/36 pack (bulk)	7.5	0.800"	0.254"
T1252	2040/30"/36 pack (bulk)	7.7	0.598"	0.280"
T1253	3050/30"/36 pack (bulk)	8.3	0.505"	0.283"

NOTE: All 700 and 800 spine arrows now come with half out inserts. Shafts have no inserts.



AMPED-XS

Durable Precision

Crafted from extremely durable composite material, the Amped-XS features Carbon Express' unique Diamond-coat finish that provides greater durability and a smoother, slicker surface for easy target removal.

FEATURES

- Diamond-coat finish – provides smoother draw and stealth performance on an arrow rest
- Straightness: ± 0.006 "
- Length: 30"
- Standard with a 70 grains cone tip installed

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty	Grains/Inch *	Spine	Diameter
ARROW				
T3035	30"/60 pack (bulk)	12.8	0.600"	0.280"
T3036	30" Red arrow/12 pack (bulk)	12.8	0.600"	0.280"
T3037	30" Black arrow/12 pack (bulk)	12.8	0.600"	0.280"
T3039	30" Red arrow/6 pack	12.8	0.600"	0.280"
T3040	30" Black arrow/6 pack	12.8	0.600"	0.280"

THUNDER EXPRESS®

Great for Aspiring Archers

The Thunder Express® is designed for young or beginning archers, made of fiberglass so it's safer than wood. It includes a weighted target point to ensure proper "front of center" balance and improved performance.

FEATURES

- Thunder Express® available in four lengths: 24, 26, 28 and 30 inches

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty
ARROW	
G0234	24"/72 pack (bulk)
G0236	26"/72 pack (bulk)
G0238	28"/72 pack (bulk)
G0240	30"/72 pack (bulk)
G0324	24"/3 pack
G0326	26"/3 pack



NEW AMPED-XS GOLF BALL FLU FLU

Crafted from extremely durable composite material, the Amped-XS features Carbon Express' unique Diamond-coat finish that provides greater durability for ground impact.


FEATURES

- Offered with three 4" full feathers
- Length 29.5"
- Standard with rubber golf ball point
- Black and red arrows

SPECIFICATIONS

*Bare shaft weight

Model	Size/Qty
ARROW	
55210	30"/18 pack (bulk)
55211	30"/2 pack

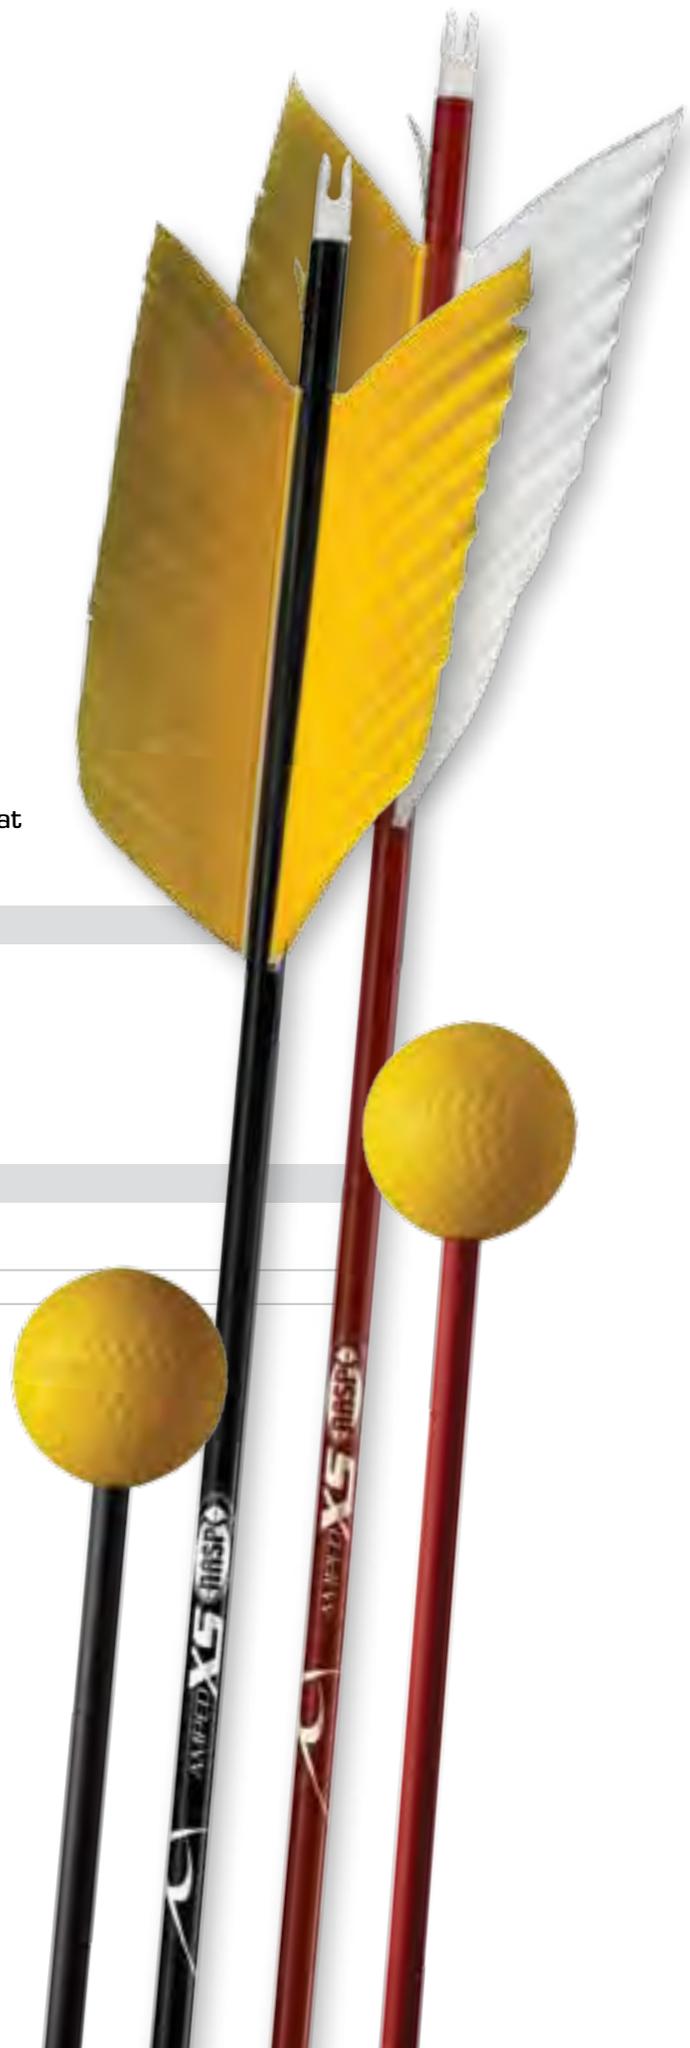

BROADHEADS

F-15™ DUAL BLADE BROADHEADS

Fly Fast. Kill Fast.

Introducing the 125 grain F-15™, the newest member of the dual blade broadhead family

For years, hunters seeking the latest advances in arrow technology have turned to Carbon Express. Now, we're bringing our reputation for breakthrough innovation to broadheads with the new F-15™ Dual Blade and F-15™ Expandable – two remarkable feats of engineering and design that will change the world of hunting.

Dual Blades: twice as deadly

The F-15™ is the only broadhead with dual, side-by-side cutting blades. The two razor-sharp blades give you six cutting edges and create up to a 250% greater wound opening than traditional broadheads. This means significantly greater blood loss, a better blood trail and ultimately, a faster kill.




F-15™ dual blade wound channel



Traditional 4-blade



Traditional 3-blade

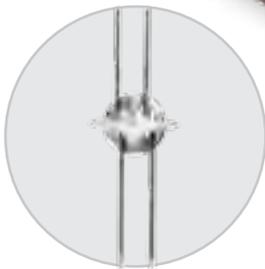

100 grains



SPECIFICATIONS

F-15™ EXPANDABLE BROADHEAD


Model	Size/Qty	
55630	100 grains/3 pack	
55633	100 grains/1 pack	
55631	Expandable Replacement Blades	
Cutting Diameter	Blade Thickness	Weight
1 3/8"	0.030"	100 grains

FEATURES

- Maximum damage – six cutting edges to create up to a 250% greater wound opening
- Field point accuracy – aerodynamic profile and 100% spin testing enhance precision and greater devastation
- Bone crushing strength – patented Pressure Injection Mold [PIM] technology uses one-piece 440 stainless steel



100 grains



NEW
125 grains

SPECIFICATIONS

F-15™ DUAL BLADE BROADHEAD

Model	Size/Qty
55625	100 grains/3 pack
55628	100 grains/1 pack
55640	125 grains/3 pack
55626	Fixed Replacement Blades

Cutting Diameter	Blade Thickness	Weight
1 1/8"	0.030"	100 grains
1 1/4"	0.030"	125 grains

SABRE™ XT PRO

Bone Crushing Strength

FEATURES

- 3-blade broadhead
- Trocar steel point for bone crushing strength



SPECIFICATIONS

SABRE™ XT PRO BROADHEAD

Model	Size/Qty		
55581	100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1 1/8"	0.030"	100 grains	



TRILOC® PRO

Locking Blades

FEATURES


- Pro-grade design with piercing trajectory
- Guarantee no blade loss with its 3 point locking blade system



SPECIFICATIONS

TRILOC® PRO BROADHEAD

Model	Size/Qty		
55596	100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1 1/8"	0.031"	100 grains	

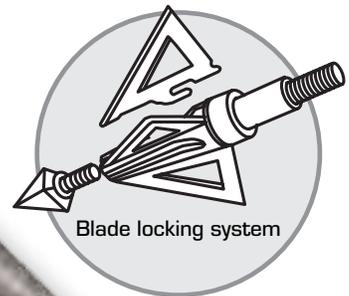


ASSAULT LP 3-BLADE

Missile Precision

FEATURES

- Heavy duty 3-blade broadhead with large cutting diameter
- Bone breaking, cut-on-contact steel point
- Low profile design for field point accuracy



SPECIFICATIONS

ASSAULT LP 3-BLADE BROADHEAD


Model	Size/Qty	
55560	100 grains/3 pack	
Cutting Diameter	Blade Thickness	Weight
1 1/8"	0.031"	100 grains

QUAD PRO

Lung Buster

FEATURES

- Solid 4-blade style with forward positioned bleeder design for field point accuracy
- 1" lead and bleeder blade cutting diameter



SPECIFICATIONS

QUAD PRO BROADHEAD

Model	Size/Qty	
55505	100 grains/3 pack	
Cutting Diameter	Blade Thickness	Weight
1"	0.045"	100 grains

XT 4-BLADE

Double Damage

FEATURES

- Strong one piece main blade construction
- Curved cutting blade surface for greater penetration
- Back of main and bleeder blade are sharpened for greater damage



SPECIFICATIONS

XT 4-BLADE BROADHEAD

Model	Size/Qty	
55515	100 grains/3 pack	
Cutting Diameter	Blade Thickness	Weight
1 1/8"	0.058"	100 grains



NATIV™ 100

Tradition Meets Technology

FEATURES

- Versatile – low to high poundage bows
- Solid 2-blade
- Aircraft-grade aluminum ferrule for superior lightweight strength



SPECIFICATIONS

NATIV™ 100 BROADHEAD

Model	Size/Qty	
55590	100 grains/3 pack	
Cutting Diameter	Blade Thickness	Weight
1 1/8"	0.047"	100 grains



TORRID™ 100

Expandable 3-Blade


FEATURES

- Field point accuracy and dependable blade retention system
- Large cutting diameter with bone crushing lead blade for maximum penetration
- Aircraft-grade aluminum ferrule

SPECIFICATIONS

TORRID™ 100 BROADHEAD

Model	Size/Qty		
55510	100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1½"	0.031"	100 grains	

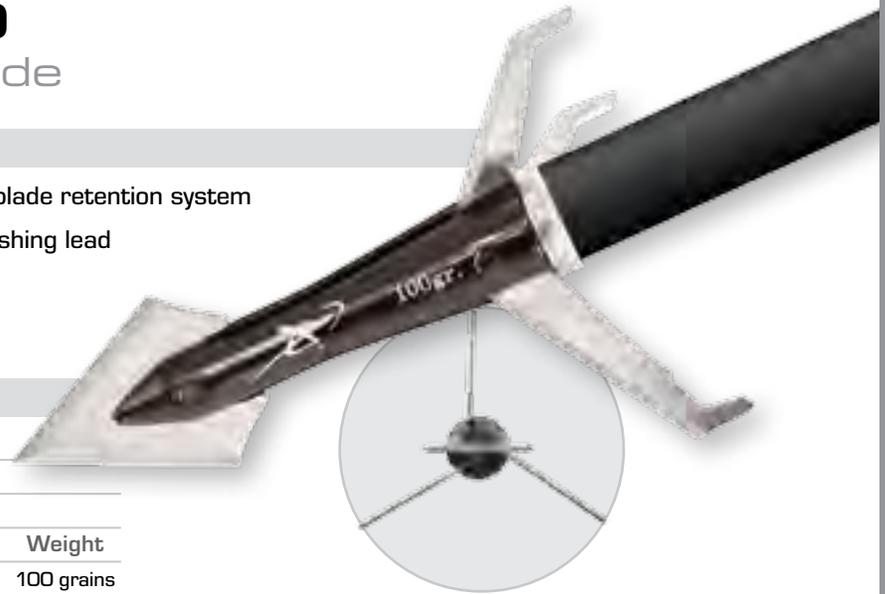

TORRID™ EXP

Expandable 2-Blade

FEATURES

- Fixed cut-on-contact head for increased penetration
- Expanding blades follow cut-on-contact blade producing a large cross-cutting diameter
- Popular choice for low poundage bows

SPECIFICATIONS

TORRID™ EXP BROADHEAD

Model	Size/Qty		
55501	100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1¼"	0.031"	100 grains	



TORRID™ SS

Expandable 3-Blade


FEATURES

- Trocar, hollow-ground chisel point
- Aircraft-grade aluminum ferrule for increased strength and penetration
- 3-blade expandable design for increased cutting action
- Weight adjustment collar allows for either an 85 or 100 grains broadhead (doubles as a stop washer)

SPECIFICATIONS

TORRID™ SS BROADHEAD

Model	Size/Qty		
55540	85-100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1½"	0.031"	85-100 grains	

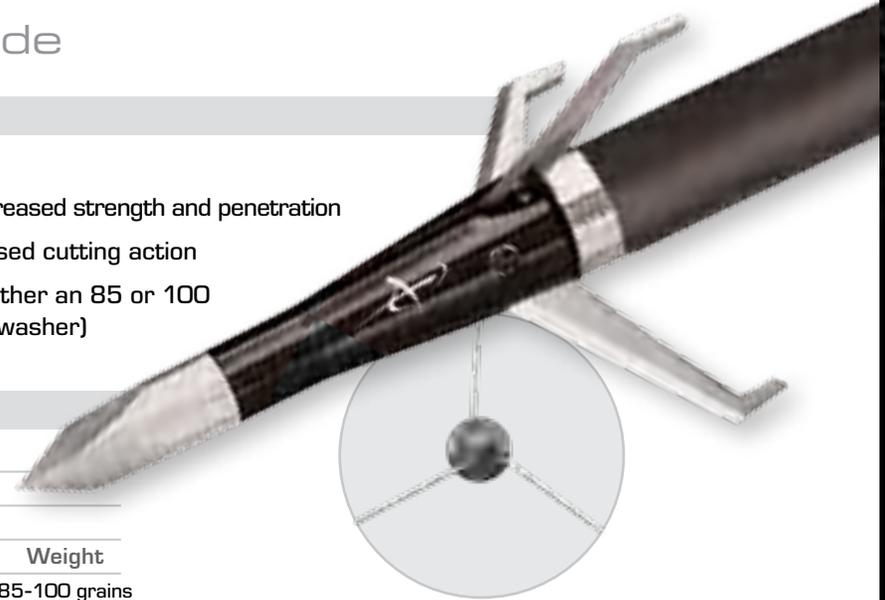


TROIKA™ 100

Triple Threat

FEATURES

- Bone breaking steel Trocar tip
- Heavy duty 3-blade design for strength and accuracy

**SPECIFICATIONS**

TROIKA™ 100 BROADHEAD

Model	Size/Qty		
55520	100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1 1/8"	0.020"	100 grains	

TROIKA™ 125

Triple Threat

FEATURES

- Bone breaking steel Trocar tip
- Heavy duty 3-blade design for strength and accuracy

**SPECIFICATIONS**

TROIKA™ 125 BROADHEAD


Model	Size/Qty		
55525	125 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1 3/16"	0.020"	125 grains	

TROIKA™ LITE 75

Super Sonic

FEATURES

- Great for youth or low poundage bows
- Bone breaking steel Trocar tip
- Heavy duty 3-blade design for strength and accuracy



SPECIFICATIONS

TROIKA™ LITE 75 BROADHEAD



Model	Size/Qty	
55636	75 grains/3 pack	
Cutting Diameter	Blade Thickness	Weight
1 1/8"	0.020"	75 grains

TROIKA™ ST3

One Shot. One Kill.

FEATURES

- Offset, cut-on-contact lead blade provides outstanding penetration
- Patented 3 point locking system design

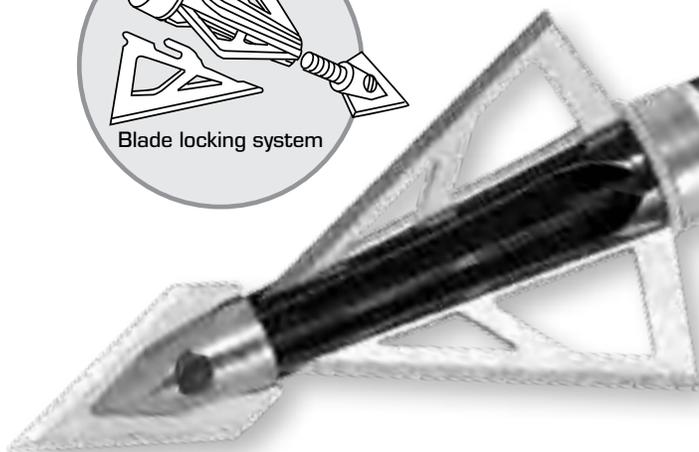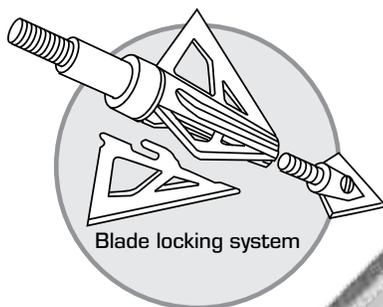

SPECIFICATIONS

TROIKA™ ST3 BROADHEAD


Model	Size/Qty	
55555	100 grains/3 pack	
Cutting Diameter	Blade Thickness	Weight
1 1/8"	0.031"	100 grains

MAYHEM™ EXT

100% Steel. 100% Lethal.

FEATURES

- Fixed 3-blade
- Low-profile design flies like a field point
- All steel for extra strength



SPECIFICATIONS

MAYHEM™ EXT BROADHEAD

Model	Size/Qty		
55545	100 grains/3 pack		
Cutting Diameter	Blade Thickness	Weight	
1"	0.017"	100 grains	

SHOCKER®

Small Game

FEATURES

- Five spring, steel claws grip turf to prevent the arrow from burrowing into the ground
- Tremendous shocking power for small-game hunting
- Perfect for stump shooting

SPECIFICATIONS

SHOCKER® BROADHEAD

Model	Size/Qty		
55530	100 grains/2 pack		
55531	125 grains/2 pack		

BROADHEAD COMPARISON CHART

SPECIFICATIONS

Model	Weight	Tip Style	Cutting Diameter	Cutting Blades	Blade Thickness	Feature
F-15™ Fixed	100 grains	Cut-on-Contact	1 ¹ / ₈ "	6	0.030"	One Piece PIM Ferrule
F-15™ Fixed	125 grains	Cut-on-Contact	1 ¹ / ₄ "	6	0.030"	One Piece PIM Ferrule
F-15™ Expandable	100 grains	Cut-on-Contact	1 ³ / ₈ "	6	0.030"	One Piece PIM Ferrule
SABRE™ XT PRO Fixed	100 grains	Trocar	1 ¹ / ₈ "	3	0.030"	
TRILOC® PRO Fixed	100 grains	Cut-on-Contact	1 ¹ / ₈ "	3	0.031"	3 point Locking Blades
ASSAULT LP 3-BLADE Fixed	100 grains	Cut-on-Contact	1 ¹ / ₈ "	3	0.031"	Low Profile
QUAD PRO Fixed	100 grains	Chisel	1"	4	0.045"	
XT 4-BLADE Fixed	100 grains	Cut-on-Contact	1 ¹ / ₈ "	4	0.058"	Sharpened Blade Back
NATIV™ 100 Fixed	100 grains	Cut-on-Contact	1 ¹ / ₈ "	2	0.047"	Low Poundage Bows
TORRID™ 100 Expandable	100 grains	Cut-on-Contact	1 ¹ / ₂ "	5	0.031"	3 Expanding Blades
TORRID™ EXP Expandable	100 grains	Cut-on-Contact	1 ¹ / ₄ "	4	0.031"	2 Expanding Blades
TORRID™ SS Expandable	85-100 grains	Trocar	1 ¹ / ₂ "	3	0.031"	Adjustable Weight
TROIKA™ 100 Fixed	100 grains	Trocar	1 ¹ / ₈ "	3	0.020"	Locking Blades
TROIKA™ 125 Fixed	125 grains	Trocar	1 ³ / ₁₆ "	3	0.020"	Locking Blades
TROIKA™ LITE Fixed	75 grains	Trocar	1 ¹ / ₈ "	3	0.020"	Great for Youth
TROIKA™ ST3 Fixed	100 grains	Cut-on-Contact	1 ¹ / ₈ "	5	0.031"	Offset COC Blade
MAYHEM™ EXT Fixed	100 grains	Trocar	1"	3	0.017"	Low Profile
SHOCKER® Small Game	100-125 grains	Spring				Small Game Head

ACCESSORIES



Color: Yellow
Model: #W3425



Color: Red
Model: #W3423



Color: Green
Model: #W3424

NEW LAZER EYE™ LIGHTED NOCKS

The Lazer Eye™ lighted nock aids the bow hunter in following the flight of an arrow and determining the location of impact. As most bow hunters know, having insight on the location of impact on the animal aids in the recovery process. It also prevents arrow loss in the event of a pass-through shot or even that unfortunate misguided shot.

Weighing in at only 18.5 grains, the Lazer Eye™ nock is only 8 grains heavier than the standard Carbon Express® nock, which equates to no difference in arrow flight or impact area up to approximately 40 yards.

The Lazer Eye™ is activated upon release of the arrow, when the bow string compresses forward upon the arrow, ensuring the nock will illuminate on each and every shot. After recovery of the arrow, the Lazer Eye™ is simple to turn off by pulling the nock from the arrow of the shaft approximately 1/16".

The Lazer Eye™ is engineered and durably constructed for repeated use, and offers up to 7 hours of illumination.

FEATURES

- Adjustable nock for precision tuning and accuracy

SPECIFICATIONS

Model	Description
W3423	Red Lazer Eye™
W3424	Green Lazer Eye™
W3425	Yellow Lazer Eye™
58016	Red Lazer Eye™/2 pack
W3426	Multicolor Lazer Eye™/3 pack

PEEP SIGHTS

Sure Vision Peep

- Allows visibility regardless of angle and twist of bowstring

SPECIFICATIONS

Model	Qty
57517	1 pack



57517

True Vision Peep

- Constructed of aircraft-grade machined aluminum
- Hole diameter 3/16"

SPECIFICATIONS

Model	Qty
57518	1 pack



57518



57518

In-Line Peep

- Beveled peep hole provides ample viewing in dim light
- Hole diameter 1/4"

SPECIFICATIONS

Model	Qty
57516	1 pack



57516



57514

Dusk Vision Peep

- Glowing dots naturally gather light to surround peep sight hole, allowing hunter to visually locate and center peep in dim light
- Hole diameter 1/8"

SPECIFICATIONS

Model	Qty
57514	1 pack

STRING SILENCER

FEATURES

- Rubber "whiskers" dramatically reduce vibration noise

SPECIFICATIONS

Model	Qty
57509	1 pack



57509

STRING LOOP

FEATURES

- Eliminates serving wear and string twist
- Improves arrow release
- Includes instructions and sample for proper knot tying

SPECIFICATIONS

Model	Qty
57507	3 pack



57507

NOCKING POINTS

FEATURES

- Rounded brass outer sleeve reduces string serving wear
- Vinyl lining holds nock in place without slipping
- Hunting nocking points fit 14-18 strand string
- Cam nocking points fit 20-24 strand string



SPECIFICATIONS

Model	Qty
57515 HUNTING	5 pack
57519 CAM	5 pack

CAM KISSER BUTTONS

FEATURES

- Achieve the same anchor point every time
- Includes metal clips for secure placement



SPECIFICATIONS

Model	Qty
57508	1 pack

EXPRESS BOND™ ARCHERY GLUE

FEATURES

- Specially designed to bond both inserts and fletching
- Works on carbon or aluminum shafts
- Clog-free cap, precision nozzle
- Bonds in seconds
- Builds dozens of arrows



SPECIFICATIONS

Model	Qty
M1037	1 pack

ELECTRONIC DIGITAL GRAINS SCALE

FEATURES

- LCD digital screen display
- 0.15 grain accuracy
- Weighs — grains, grams, ounces and CWT
- Extremely small (5" x 3" x 3/4") and lightweight (6 oz)

SPECIFICATIONS

Model	Qty
60200	1 pack



NEW CARBRA-MAX™ STABILIZER

The Carbra-Max™ features a main body carbon woven tube with an outer aluminum tube weight and three ribbed rubber modules. Combined, these dramatically reduce bow shock and vibration. The rubber modules also dampen vibration waves in all directions, creating less hand torque and a quieter bow.

FEATURES

- Uses Carbon Express woven carbon tubes
- Free floating aluminum weight system
- Three rubber vibration damping modules

SPECIFICATIONS

Model	Color
57545	Black
57546	Mossy Oak® Break-Up™
57547	* Mathew's® Lost Camo™

* Mathews® components are available at authorized Mathews® dealers only.



STRING TRACKER AND TRACKER BRACKET

The world's most successful game recovery system.

FEATURES

- Low friction center wound spool reduces line drag for improved arrow flight
- 2,500 feet of string
- Works for all big game and turkey

SPECIFICATIONS

Model	Name
57511	String Tracker
57512	Replacement Spools
57513	Tracker Bracket



PRO BOW SQUARE

FEATURES

- Critical for precision bow tuning
- Includes metal clips for secure placement
- Works on recurve and compound bows



SPECIFICATIONS

Model	Qty
58001	1 pack

STRING LOOP NOCKING PLIERS

FEATURES

- Pre stretches D-loop
- Permanently tightens D-loop to string
- Opens nock set without damage
- Two hole sizes for nock set installation
- Heavy duty comfortable extra large grip



SPECIFICATIONS

Model	Qty
58004	1 pack

TEFLON® UNIVERSAL CABLE SLIDE

FEATURES

- Fits 3/8" cable guard rods
- 100% Teflon, eliminates friction and noise

SPECIFICATIONS

Model	Qty
57510	1 pack



*Teflon® is a registered trademark of E.I. Dupont de Nemours and Company.

ARROW SELECTION GUIDE

BOW DRAW WEIGHT

Adjusted Weight Chart

Proper spine selection is the key to optimum arrow flight. With today's modern compounds, there are many variables that effect how an arrow reacts when it is thrust from the bow. The bow's cam, bow speed, arrow length and many other conditions effect performance during flight. Given the number of variables that require consideration, Carbon Express **STRONGLY** recommends that you begin by using the company's adjusted bow draw weight chart to calculate a final pound number for your bow.

It is **CRITICAL** that you determine your proper adjusted bow draw weight before selecting hunting arrow shafts.

	Bow Draw Weight 59.9 lbs. or under	Bow Draw Weight 60 lbs. or over	Calculated Draw Weight
1. Measured Draw Peak Weight	-----	-----	= _____
2. Round Wheel	0	0	
Modified Cam	+5	+7	
High-Energy Cam	+6	+8	= _____
3. 65% - 80% Let-Off	-4	-5	
50% Let-Off	0	0	
Recurve	-4	-7	
Longbow	-10	-15	= _____
4. Glue-In Target Points 60-79 grains	-9	-9	
Glue-In Target Points 80-99 grains	-7	-7	
Glue-In Target Points 100 grains	-6	-6	
Glue-In Target Points 110-120 grains	-5	-5	
Glue-In Target Points 145 grains	-4	-4	
Insert & 70-79 grains Screw-In Point	-9	-9	
Insert & 80-99 grains Screw-In Point	-8	-8	
Insert & 100 grains Screw-In Point	-7	-7	
Insert & 125 grains Screw-In Point	-6	-6	
Insert & 145 grains Screw-In Point	-5	-5	= _____
5. Arrow Length 25.9" or less	-2	-2	
Arrow Length 26" to 27.9"	+1	+1	
Arrow Length 28"	+2	+3	= _____
6. Finger Release	+3	+6	= _____
7. If the bow's speed rating exceeds:	AMO	IBO	
	240 FPS	300 FPS	+2
	245 FPS	306 FPS	+3
	250 FPS	313 FPS	+4
	255 FPS	319 FPS	+7
	260 FPS	325 FPS	+9
	270 FPS	335 FPS	+11
	280 FPS	345 FPS	+13
	290 FPS	360 FPS	+15
			= _____

Adjusted Bow Draw Weight =

HUNTING ARROW SHAFT SELECTION GUIDE

Adjustable Bow Draw Weight

TOTAL ARROW LENGTH

	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	33"
25-30 lbs.	AP PT800	AP PT800	AP PT800 HE75	AP PT800 HE75 MAX150	AP PT800 HE75 MAX150	AP PT700 HE90 MAX150 MMP150	TS PT700 HE90 MAX150 MMP150	TS PT2040 HE150 MAX150	M5TL250 TR4560 HE150 MAX250	M5TL250 TR4560 HE250 MAX250	M5TL250 TR4560 HE250 MAX250
30-35 lbs.	AP PT800	AP PT800 HE75	AP PT800 HE75 MAX150	AP PT800 HE75 MAX150	AP PT700 HE75 MAX150 MMP150	AP TS PT2040 TR4560 HE90 MAX150 MMP150	TS PT2040 TR4560 HE90 MAX150 MMP150	TS PT3050 TR4560 HE150 MAX150	M5TL250 TR4560 HE150 MAX250	M5TL250 TR4560 HE250 MAX250	M5TL250 TR4560 HE250 MAX250
36-39 lbs.	AP PT800 HE75	AP PT800 HE75	AP PT700 HE75 MAX150	AP TS PT700 HE75 MAX150 MMP150	AP TS PT2040 TR4560 HE90 MAX150 MMP150	AP TS PT2040 TR4560 HE90 MAX150 MMP150	TS PT3050 TR4560 HE150 MAX250	PT4560 M5TL250 TR4560 HE150 MAX250	M5TL250 TR4560 HE250 MAX250	M5TL250 TR4560 HE250 MAX250	M5TL250 TR4560 HE250 MAX250
40-45 lbs.	AP PT800 HE75	AP PT700 HE75	AP TS PT700 TR4560 HE75 MAX150 MMP150	AP TS PT2040 TR4560 HE90 MAX150 MMP150	AP TS PT3050 TR4560 HE90 MAX150 MMP150	TS PT3050 TR4560 HE150 MAX150 MMP150	PT4560 M5TL250 TR4560 HE150 MAX250	PT4560 M5TL250 TR4560 HE250 MAX250	M5TL250 TR4560 HE250 MAX250	M5TL350 TR4560 HE250 MAX350	M5TL350 TR6075 HE350 MAX350
46-51 lbs.	AP PT700 HE75	AP TS PT2040 HE90	AP TS PT2040 TR4560 HE90 MAX150 MMP150	AP TS PT3050 TR4560 HE90 MAX150 MMP150	TS PT3050 TR4560 HE150 MAX150 MMP150	PT4560 M5TL250 TR4560 HE150 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT6075 M5TL250 TR4560 HE250 MAX250	M5TL350 TR6075 HE350 MAX350	M5TL350 TR6075 HE350 MAX350
52-57 lbs.	AP TS HE90	AP TS PT3050 HE90	TS PT3050 TR4560 HE90 MAX150 MMP150	PT4560 M5TL250 TR4560 HE150 MMP250 MAX250	PT4560 M5TL250 TR4560 HE150 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT6075 M5TL350 TR6075 HE350 MAX350	M5TL350 TR6075 HE350 MAX350	M5TL350 TR6075 HE350 MAX350
58-63 lbs.	TS HE90	TS PT3050 HE90	PT4560 M5TL250 TR4560 HE150 MMP250 MAX250	PT4560 M5TL250 TR4560 HE150 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	M5TL350 TR6075 HE350 MAX350	M5TL350 TR6075 HE350 MAX350
64-69 lbs.			PT4560 M5TL250 TR4560 HE150 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	M5TL350 TR6075 HE350 MMP450 MAX450	M5TL350 HE350 MMP450 MAX450
70-75 lbs.			PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT4560 M5TL250 TR4560 HE250 MMP250 MAX250	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	M5TL350 HE350 MMP450 MAX450	MMP450 MAX450
76-81 lbs.			PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 HE350 MMP350 MAX350	MMP450 MAX450	MMP450 MAX450	MMP450 MAX450
82-87 lbs.			PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 HE350 MMP450 MAX450	MMP450 MAX450	MMP450 MAX450	MMP450 MAX450	MMP450 MAX450
88-93 lbs.			PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 TR6075 HE350 MMP350 MAX350	PT6075 M5TL350 HE350 MMP450 MAX450	MMP450 MAX450	MMP450 MAX450	MMP450 MAX450	MMP450 MAX450	MMP450 MAX450

BOW DRAW WEIGHT

LEGEND: AP = Amped TS = Thunderstorm® PT = Predator™ II HE = Heritage®
 TR = Terminator® and Rebel® MAX = Maxima® M5TL = Mach 5™, Terminator® Lite
 MMP = Mayhem™, Mutiny™ and PileDriver™

TARGET ARROW SHAFT SELECTION GUIDE

Adjustable Bow Draw Weight

TOTAL ARROW LENGTH

	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	
13-18 lbs.	MXR2000	MXR1800	MXR1500	MXR1300	NA1100 MXR1100	NA1000 MXR1000 MPR1000	NP900 NA900 MXR900 MPR900					
19-24 lbs.	MXR1500	MXR1300	PT800 NA1100 MXR1100	PT800 NA1000 MXR1000 MPR1000	PT800 NA1000 MXR1000 MPR1000	CXL150 MAX150 PR800 NP800 NA830 MXR800 MPR800	CXL150 MAX150 PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 NP700 SD550 NP600 NA630 MXR600 MPR650	CXL150 MAX150 NP650 NA630 MXR600 MPR650			
25-34 lbs.	MXR1300	PT800 MXR1100	PT800 NA1000 MXR1000 MPR1000	PT800 NP900 NA900 MXR900 MPR900	CXL150 MAX150 PT800 NP800 NA830 MXR800 MPR800	CXL150 MAX150 PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 LJ250 PT700 NP700 NA680 MXR630 MPR650	CXL150 MAX150 LJ250 SD550 NP600 NA630 MXR600 MPR650	CXL250 MAX250 LJ250 SD550 NP600 NA580 MXR600 MPR590	CXL250 LJ250 MAX250	CXL250 LJ250 MAX250	
35-39 lbs.	MXR1100	PT800 NA1000 MXR1000 MPR1000	CXL150 MAX150 PT800 NP900 NA900 MXR900 MPR900	CXL150 MAX150 PT800 NP800 NA830 MXR800 MPR800	CXL150 MAX150 PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 LJ250 PT700 NP700 NA680 MXR630 MPR650	CXL150 MAX150 LJ250 PT550 NP550 NA580 MXR530 MPR530	CXL250 MAX250 LJ250 SD550 NP600 NA580 MXR600 MPR590	CXL250 MAX250 LJ250 XJ* SD550 NP500 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP500 NA490 MXR500 MPR470	CXL250 LJ250 MAX250 XJ* SD450 NP450 NA450 MXR410	
40-45 lbs.	PT800 NA1000 MXR1000 MPR1000	CXL150 MAX150 PT800 NP900 NA900 MXR900 MPR900	CXL150 MAX150 PT800 NP800 NA830 MXR800 MPR800	CXL150 MAX150 PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 LJ250 PT700 NP700 NA680 MXR630 MPR650	CXL150 MAX150 LJ250 PT700 NP650 NA630 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP550 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD550 NP500 NA500 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL350 MAX350 XJ*
46-51 lbs.	PT800 NP900 NA900 MXR900 MPR900	CXL150 MAX150 PT800 NP800 NA830 MXR800 MPR800	CXL150 MAX150 PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 LJ250 PT700 NP700 NA680 MXR630 MPR650	CXL150 MAX150 LJ250 PT700 NP650 NA630 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP550 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD550 NP500 NA500 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA410 MXR410	CXL250 MAX250 LJ250 XJ* SD450 NP400 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP400 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA350 MXR350
52-57 lbs.	PT800 NP800 NA830 MXR800 MPR800	CXL150 MAX150 PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 LJ250 PT700 NP700 NA680 MXR630 MPR650	CXL250 MAX250 LJ250 SD550 NP650 NA630 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP600 NA580 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP550 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP500 NA500 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA410 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP400 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP400 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR350
58-63 lbs.	PT700 NP750 NA730 MXR700 MPR710	CXL150 MAX150 PT700 NP700 NA680 MXR630 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP650 NA630 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP600 NA580 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP550 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP500 NA490 MXR500 MPR470	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL250 MAX250 LJ250 XJ* SD450 NP450 NA410 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP400 NA410 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR350
64-69 lbs.	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP600 NA580 MXR600 MPR650	CXL250 MAX250 LJ250 XJ* SD550 NP550 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP500 NA490 MXR500 MPR470	CXL350 MAX350 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP450 NA410 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP400 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR350	
70-75 lbs.	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	CXL250 MAX250 LJ250 XJ* SD550 NP550 NA530 MXR500 MPR530	CXL250 MAX250 LJ250 XJ* SD450 NP500 NA490 MXR470	CXL350 MAX350 LJ250 XJ* SD450 NP450 NA450 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP400 NA410 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR410	CXL350 MAX350 LJ250 XJ* SD450 NP350 NA380 MXR350	

BOW DRAW WEIGHT

LEGEND: XJ = X-Jammer-27™ Pro LJ = LineJammer® Pro CXL = CXL™ Pro NA = Nano-XR®
 MPR = Medallion™-Pro MXR = Medallion™-XR NP = Nano-Pro™ PT = Predator™ II
 MAX = Maxima Blue Streak™ Select

*A heavier point may be required to achieve proper arrow flight.

NOCKS

Strength and Durability

All TCX nocks are made of polycarbonate for strength and durability.

TCX Standard Nocks



Fits all standard Carbon Express® shafts with a 0.244 inside diameter.

TCX #2 Nocks



Fits all Carbon Express® shafts with a 0.234 inside diameter.

Pin Nock Soma



Polycarbonate for extra strength. Available in two inner throat sizes: #1 fits 14-18 strand strings; #2 fits 20-24 strand strings.

Pin Nock Adapter



Carbon Express® pin nock adapters fit all standard pin nocks. The models designed for the Nano-Pro™ and Nano-XR™ are constructed from aircraft grade 7075-T6 aluminum for added durability. Pin nock adapters for Medallion™ series, CXL™ Pro, LineJammer® Pro, X-Jammer-27™ Pro and standard 0.244 diameter arrows are made from premium grade 2011 aluminum.

Post Nock



Center axis design allows for ultimate precision and overall performance. One piece nock construction features a tool steel pin molded inside the nock for extreme strength and greater durability.

Available for both Nano-Pro™ and Nano-XR®

FIELD POINTS

Field Points



Carbon Express is proud to offer our classic Bullet Point Field Points. The points are made of black zinc-coated steel and are available in three diameters: 19/64 to fit the standard carbon shafts and 21/64 and 11/32 to fit crossbow and aluminum arrows.

SPECIFICATIONS

Model	Size - Grains Weight
55902	19/64 - 100 grains
55903	19/64 - 125 grains
55904	21/64 - 100 grains
55905	21/64 - 125 grains
55900	11/32 - 100 grains
55901	11/32 - 125 grains

TARGET POINTS

Tungsten Points

Premium high density point in a compact design, ideal for long distance field shooting. Constructed from 92% pure tungsten – highest density in the market – and featuring weight segments for optimizing point performance from 120 grains down to 90 grains between the two available models.



Available for Nano-Pro™

A-1 Tool Steel

The strongest point in the Carbon Express® line is made of high quality machine tool steel that will NOT bend. The tool steel material is machined to the tightest tolerances in the industry and is strong enough to withstand the hardest of targets. Combine the strength factor with the ability to optimize the point weight from 120 grains down to 90 grains for the ultimate in precision and performance.



Available for both Nano-Pro™ and Nano-XR®

Stainless Steel

Constructed from 440 stainless steel, these precision machined points are available for Carbon Express® field shafts. The points are specifically designed with a parabolic shape for improved use in removing from the target and drawing through the clicker. Precision weight segments allow for optimal customization from 120 grains down to 80 grains.



Available for Nano-Pro™, Nano-XR® and Medallion™ Pro

PARABOLIC POINTS

Steel construction features a threaded weight that incorporates break off grooves for different weight increments.

Medallion™ XR



Standard CX 0.244



Large Diameter Shafts

Steel point construction with a threaded inner chamber that allows different threaded weight segments for precise point weight adjustments.

CXL™ Pro, LineJammer® Pro and X-Jammer-27™ Pro

Custom weight for large diameter shaft points.
Weights available: 20 grains; 45 grains; 60 grains; 85 grains



MAXIMA HUNTER® KV 250, 350

The Strongest Maxima® Arrow

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 BullDog™ Nock Collar 4.0 grains	 TCX Nock 10.2 grains
W2039	W3001 - 250 - (Type 1) W3002 - 350 - (Type 2)	W2024 - 250 W2025 - 350	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAXIMA HUNTER® 250, 350, 450

Maximum Speed and Accuracy

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 BullDog™ Nock Collar 4.0 grains	 TCX Nock 10.2 grains
W2039	W3001 - 250 - (Type 1) W3001 - 350 - (Type 1) W3002 - 450 - (Type 2)	W2024 - 250 W2025 - 350 50190 - 450	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAXIMA BLUE STREAK™ 150, 250, 350

Taking Accuracy to a New Level

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 BullDog™ Nock Collar 3.7 grains or 4.0 grains	 TCX Nock 10.2 grains
W2039	50196 - 150 - (Type O) 50196 - 250 - (Type O) W3001 - 350 - (Type 1)	50207 - 150 - (3.7 grains) 50208 - 250 - (4.0 grains) 50209 - 350 - (4.0 grains)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAXIMA BLUE STREAK™ SELECT 150, 250, 350

Raising the Bar on Accuracy

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 BullDog™ Nock Collar 3.7 grains or 4.0 grains	 TCX Nock 8.7 grains
W2039	50196 - 150 - (Type O) 50196 - 250 - (Type O) W3001 - 350 - (Type 1)	50207 - 150 - (3.7 grains) 50208 - 250 - (4.0 grains) 50209 - 350 - (4.0 grains)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAYHEM™ HUNTER 250, 350

Speed, Accuracy and Penetration

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 Bulldog™ Nock Collar 4.0 grains	 TCX Nock 10.2 grains
W2039	W3001 - 250 - (Type 1) W3002 - 350 - (Type 2)	50192 - 250 50193 - 350	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAYHEM HOT PURSUIT™ 150

Speed, Accuracy and Penetration

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 Bulldog™ Nock Collar 4.0 grains	 TCX Nock 10.2 grains
W2039	W3001 - 150 - (Type 1)	Call for more information	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAYHEM™ 250, 350

Speed, Accuracy and Penetration

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 Bulldog™ Nock Collar 4.0 grains	 TCX Nock 10.2 grains
W2039	W3001 - 250 - (Type 1) W3002 - 350 - (Type 2)	50194 - 250 50195 - 350	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

PILEDRIIVER™ HUNTER 250, 350, 450

Ultimate Penetration

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 Bulldog™ Nock Collar 3.7 grains or 4.0 grains	 TCX Nock 10.2 grains
W2039	W3002 - (Type 2)	50200 - 250 50201 - 350 50202 - 450	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

PILEDRIVER™ 250, 350

Ultimate Penetration

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 BullDog™ Nock Collar 4.0 grains	 TCX Nock 10.2 grains
W2039	W3001 - 250 - (Type 1) W3002 - 350 - (Type 2)	50203 - 250 50204 - 350	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MACH 5™ 250, 350

Lightning Speed

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 TCX Nock 10.2 grains
W2039	50196 - 250 - (Type 0) W3001 - 350 - (Type 1)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MUTINY™ 150

Deadly Reliable

 Parabolic Target Point #2 90 grains	 Point Insert #4 11 grains	 TCX Nock #2 9.0 grains
55920	W3003 - (Type 4)	W2120 - yellow W2122 - white

MUTINY™ 250, 350

Deadly Reliable

 Parabolic Point Adjustable 60 – 100 grains	 Point Inserts 11 grains	 TCX Nock 10.2 grains
W2039	W3001 - (Type 1)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

PREDATOR™ II 700, 800

Vicious Value

		
Parabolic Point Adjustable 80 grains	Predator™ II Half Out Insert 46.6 grains	Amped-XS Nock 10.8 grains
W4010	50171	50177 - white 50178 - yellow 50179 - green 50180 - flo red

PREDATOR™ II 2040, 3050

Vicious Value

		
Parabolic Target Point #2 90 grains	Point Insert #4 11 grains	TCX Nock #2 9.0 grains
55920	W3003	W2120 - yellow W2122 - white

PREDATOR™ II 4560, 6075

Vicious Value

		
Parabolic Point Adjustable 60 – 100 grains	Point Inserts 11 grains	TCX Nock 10.2 grains
W2039	W3001 - (Type 1)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

THUNDERSTORM®

Low Poundage Hunting Arrow

		
Parabolic Target Point #2 90 grains	Point Insert #4 11 grains	TCX Nock #2 9.0 grains
55920	W3003 (Type 4)	W2120 - yellow W2122 - white

HERITAGE® 75, 90

Tradition Meets Technology

	
Point Insert #4 11 grains	TCX Nock #2 9.0 grains
W3003	W2120 - yellow W2122 - white

HERITAGE® 150, 250, 350

Tradition Meets Technology

		
Parabolic Point Adjustable 60 - 100 grains	Point Inserts 11 grains	TCX Nock 10.2 grains
W2039	W3002 - (Type 2)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

MAXIMA HUNTER® 250, 350

Mathews® Edition

			
Parabolic Point Adjustable 60 - 100 grains	Point Inserts 11 grains	BullDog™ Nock Collar 4.0 grains	TCX Nock 10.2 grains
W2039	W3001 - (Type 1)	W3416 - 250 W3409 - 350	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

TERMINATOR® LITE 250, 350

Mission® Edition

		
Parabolic Point Adjustable 60 - 100 grains	Point Inserts 11 grains	TCX Nock 10.2 grains
W2039	50196 - 250 - (Type O) W3001 - 350 - (Type 1)	W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear

AMPED YOUTH

Mission® Edition

 <p>Point Inserts 11 grains</p>	 <p>TCX Nock #2 9.0 grains</p>
<p>Call for more information</p>	<p>W2121 - yellow W2122 - white</p>

TERMINATOR® 4560, 6075

 <p>Parabolic Point Adjustable 60 – 100 grains</p>	 <p>Point Inserts 11 grains</p>	 <p>TCX Nock 10.2 grains</p>
<p>W2039</p>	<p>W3001 - 4560 - (Type1) W3002 - 6075 - (Type 2)</p>	<p>W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear</p>

REBEL® 4560, 6075

 <p>Parabolic Point Adjustable 60 – 100 grains</p>	 <p>Point Inserts 11 grains</p>	 <p>TCX Nock 10.2 grains</p>
<p>W2039</p>	<p>W3001 - 4560 - (Type1) W3002 - 6075 - (Type 2)</p>	<p>W2041 - clear yellow W2215 - white W2216 - green W2217 - orange W2239 - clear</p>

NANO-PRO™ 600, 650, 700, 750, 800, 900

FITA World Cup Champion

 <p>Points</p>	 <p>Pin Nock Adapter 6.9 grains</p>	 <p>BullDog™ Nock Collar 1.3 grains</p>	 <p>Post nock - 11 grains Soma nock - 3.4 grains</p>
<p>50147 - Stainless #2 110-100 grains 50148 - Stainless #2 90-80 grains 50150 - Tool Steel #2 A-1 110-90 grains 50152 - Tungstun #2 A-1 110-90 grains</p>	<p>50123 - Pin nock adapter #2</p>	<p>50128 - Nano-Pro™ 600 50159 - Nano-Pro™ 650 50160 - Nano-Pro™ 700 50161 - Nano-Pro™ 750 50162 - Nano-Pro™ 800</p>	<p>50134 - Post nock - green 50135 - Post nock - orange 50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

NANO-PRO™ 450, 500, 550

FITA World Cup Champion

 <p>Points</p>	 <p>Pin Nock Adapter 7.1 grains</p>	 <p>BullDog™ Nock Collar 1.3 grains</p>	 <p>Post nock - 11 grains Soma nock - 3.4 grains</p>
<p>50145 - Stainless #1 120-110 grains 50146 - Stainless #1 100-90 grains 50149 - Tool Steel #1 A-1 120-100 grains 50151 - Tungstun #1 A-1 120-100 grains</p>	<p>50122 - Pin nock adapter #1</p>	<p>50125 - Nano-Pro™ 450 50126 - Nano-Pro™ 500 50127 - Nano-Pro™ 550</p>	<p>50134 - Post nock - green 50135 - Post nock - orange 50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

NANO-PRO™ 350, 400

FITA World Cup Champion

 <p>Points</p>	 <p>Pin Nock Adapter 7.1 grains</p>	 <p>BullDog™ Nock Collar 1.3 grains</p>	 <p>Post nock - 11 grains Soma nock - 3.4 grains</p>
<p>50176 - Stainless #3 120-110 grains 50175 - Tool Steel #3 A-1 100-90 grains</p>	<p>50122 - Pin nock adapter #1</p>	<p>50124 - Nano-Pro™ 400 50172 - Nano-Pro™ 350</p>	<p>50134 - Post nock - green 50135 - Post nock - orange 50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

NANO-XR® 830, 900, 1000, 1100

FITA World Champion

 <p>Points</p>	 <p>Pin Nock Adapter 7.7 grains</p>	 <p>Post nock - 11 grains Soma nock - 3.4 grains</p>
<p>50215 - Stainless #3 100-90 grains 50216 - Stainless #3 80-70 grains 50144 - Tool Steel #3 A-1 100-80 grains</p>	<p>50202 - Pin nock adapter #2</p>	<p>50132 - Post nock - green 50133 - Post nock - orange 50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

NANO-XR® 530, 580, 630, 680, 730

FITA World Champion

 <p>Points</p>	 <p>Pin Nock Adapter</p>	 <p>BullDog™ Nock Collar 1.3 grains</p>	 <p>Post nock - 11 grains Soma nock - 3.4 grains</p>
<p>50214 - Stainless #2 100-110 grains 50213 - Stainless #2 80-90 grains 50143 - Tool Steel #2 A-1 90-110 grains</p>	<p>50202 - Pin nock adapter #2 7.7 grains (Use with 680 and 730) 50201 - Pin nock adapter #1 8.0 grains (Use with 530, 580 and 630)</p>	<p>50167 - Nano-XR® 530 50168 - Nano-XR® 580 50169 - Nano-XR® 630</p>	<p>50132 - Post nock - green 50133 - Post nock - orange 50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

NANO-XR® 380, 410, 450, 490

FITA World Champion

 <p>Points</p>	 <p>Pin Nock Adapter 8.0 grains</p>	 <p>BullDog™ Nock Collar 1.3 grains</p>	 <p>Post nock - 11 grains Soma nock - 3.4 grains</p>
<p>50212 - Stainless #1 120-110 grains 50211 - Stainless #1 100-90 grains 50142 - Tool Steel #1 A-1 120-100 grains</p>	<p>50201 - Pin nock adapter #1</p>	<p>50163 - Nano-XR® 380 50164 - Nano-XR® 410 50165 - Nano-XR® 450 50166 - Nano-XR® 490</p>	<p>50132 - Post nock - green 50133 - Post nock - orange 50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

MEDALLION™-PRO 650, 710, 800, 900, 1000

Laser Precision

 <p>Points</p>	 <p>Pin Nock Adapter 7.5 grains</p>	 <p>Soma nock 3.4 grains</p>
<p>50157 - Stainless #2 120-100 grains 50158 - Stainless #2 90-70 grains</p>	<p>50154 - Pin nock adapter #2</p>	<p>50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

MEDALLION™-PRO 410, 470, 530, 590

Laser Precision

 <p>Points</p>	 <p>Pin Nock Adapter 7.6 grains</p>	 <p>Soma nock 3.4 grains</p>
<p>50155 - Stainless #1 120-100 grains 50156 - Stainless #1 90-70 grains</p>	<p>50153 - Pin nock adapter #1</p>	<p>50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

MEDALLION™-XR 1800, 2000

Aspiring Champions

 <p>Points</p>	 <p>Pin Nock Adapter 6.9 grains</p>	 <p>Soma nock 3.4 grains</p>
<p>50148 - Stainless #2 - 90-80 grains</p>	<p>50123 - Pin nock adapter #2</p>	<p>50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

MEDALLION™-XR 500, 600, 700, 800, 900, 1000, 1100, 1300, 1500

Aspiring Champions

 <p>Points</p>	 <p>Pin Nock Adapter 8.0 grains</p>	 <p>Soma Nock 3.4 grains</p>
<p>50411 - Adjustable 110 - 60 grains</p>	<p>50410 - pin nock adapter</p>	<p>50136 - Soma nock #1 - green 50137 - Soma nock #2 - green 50138 - Soma nock #1 - yellow 50139 - Soma nock #2 - yellow</p>

CXL™ PRO 150, 250, 350

Line Cutter

 Points	 Pin Nock Adapter 17.6 grains	 BullDog™ Nock Collar 4.6 grains	 CXL™ nock, 11grains Soma nock, 3.4 grains
55918 - Parabolic - 70 grains 55919 - Parabolic - 120 grains	W2027 - CXL™ pin nock adapter	W3403 - CXL™ - 150 W3404 - CXL™ - 250 W3405 - CXL™ - 350	W2030 - CXL™ - flo yellow W2032 - CXL™ - black 50136 - Soma nock #1 green 50137 - Soma nock #2 green 50138 - Soma nock #1 yellow 50139 - Soma nock #2 yellow
 Screw in weights			
W4111 - 20 grains W4112 - 45 grains W4113 - 60 grains W4114 - 85 grains			

X-JAMMER-27™ PRO

Wide Body

 Points	 Pin Nock Adapter 27.1 grains	 BullDog™ Nock Collar 5.6 grains	 Soma nock 3.4 grains
W2044 - Parabolic - 120 grains W2045 - Parabolic - 210 grains	W2043 - XJ-27	W2046 - XJ-27	50136 - Soma nock #1 green 50137 - Soma nock #2 green 50138 - Soma nock #1 yellow 50139 - Soma nock #2 yellow
 Screw in weights			
W4111 - 20 grains W4112 - 45 grains W4113 - 60 grains W4114 - 85 grains			

LINEJAMMER® PRO

Competition Proven

 Points	 Pin Nock Adapter 17.6 grains	 BullDog™ Nock Collar 5.2 grains	 Soma nock 3.4 grains
W4107 - Parabolic - 90 grains W4108 - Parabolic - 140 grains	W2028 - LJ pin nock adapter	W3402 - LineJammer®	50136 - Soma nock #1 green 50137 - Soma nock #2 green 50138 - Soma nock #1 yellow 50139 - Soma nock #2 yellow
 Screw in weights			
W4111 - 20 grains W4112 - 45 grains W4113 - 60 grains W4114 - 85 grains			

MAXIMA BLUE STREAK™ SELECT 150, 250, 350

Raising the Bar on Accuracy

 <p>Parabolic Point Adjustable 60 – 100 grains</p>	 <p>Pin Nock Adapter 10.2 grains</p>	 <p>BullDog™ Nock Collar 3.7 grains or 4.0 grains</p>	 <p>TCX nock, 8.7 grains Soma nock, 3.4 grains</p>
<p>W2039</p>	<p>W2026 - CX</p>	<p>50207 - 150 - (3.7 grains) 50208 - 250 - (4.0 grains) 50209 - 350 - (4.0 grains)</p>	<p>W2041 - TCS - clear, yellow W2215 - TCX - white W2216 - TCX - green W2217 - TCX - orange W2239 - TCX - clear 50136 - Soma nock #1 green 50137 - Soma nock #2 green 50138 - Soma nock #1 yellow 50139 - Soma nock #2 yellow</p>

AMPED-XS

Durable Precision

 <p>Amped-XS Point 70 grains</p>	 <p>Amped-XS TCX nock 10.8 grains</p>
<p>50181</p> <p>Note: Arrow comes complete with components Length: 30 inches</p>	<p>50177 - white 50178 - yellow 50179 - green</p>

THUNDER EXPRESS®

Great for Aspiring Archers

Length: 24, 26, 28, 30 inches

For technical assistance on any
Carbon Express® arrow and dealer
orders call 1.800.241.4833

For instructions and arrow assembly,
refer to our website.

For safe shooting refer to:
www.safearrow.com



3476 Eastman Drive
Flushing, MI 48433
P: 800.241.4833
F: 810.733.2077

carbonexpressarrows.com

P5067-11