

PSE
PRO
SERIES

2017 new



Carbon Air™ 34 ECS

2017 new



Carbon Air™ 32 ECS

2017 new



Carbon Air™ HD



Full Throttle™

ATA/IBO SPEED	336-328 FPS	342-334 FPS	340-332 FPS	370-362 FPS
BRACE HEIGHT	6-7/8"	6-3/8"	6-1/8"	5-1/4"
AXLE-TO-AXLE	34"	31-1/2"	32"	33-1/4"
LETOFF %	80%-90%	80%-90%	80%	70%
DRAW LENGTH RANGE	26 - 31-1/2"	24-1/2" TO 30"	24-1/2" TO 30-1/2"	26-1/2" TO 30"
PEAK WEIGHT	60, 65, 70#	60, 65, 70#	50, 60, 65, 70#	50, 60, 65, 70#
MASS WEIGHT	3.6 LBS.	3.3 LBS.	3.2 LBS.	4.1 LBS.
MAX LIMB BOLT TURNS FROM BOTTOM	10	10	7	7
COLOR OPTIONS	BREAK-UP® COUNTRY®, SKULLWORKS® 2, BLACK CAMO OR ALL BLACK	BREAK-UP® COUNTRY®, SKULLWORKS® 2, BLACK CAMO OR ALL BLACK	BREAK-UP® COUNTRY®, SKULLWORKS® 2, BLACK CAMO OR ALL BLACK	BREAK-UP® COUNTRY®, SKULLWORKS® 2 OR ALL BLACK
PART NUMBER	1731HL	1631HL	1631HD	1431FT

PSE
PRO
SERIES

2017 new



2017 new



2017 new



2017 new



2017 new



Evolve™ 35

Evolve™


Decree® 32

Decree® 35

Beast™

Inertia™

ATA/IBO SPEED	340-332 FPS	346-338 FPS	340-332 FPS	338-330 FPS	350-342 FPS @ 33" 320-312 FPS @ 30"	348-340 FPS
BRACE HEIGHT	6-1/2"	6-1/4"	6"	6-1/2"	7-1/4"	6"
AXLE-TO-AXLE	35"	31"	32"	35"	38"	31-3/8"
LETOFF %	80%-90%	80%-90%	80%	80%	80% & 65%	75%
DRAW LENGTH RANGE	26" TO 31-1/2"	24-1/2" TO 30"	24-1/2" TO 30-1/2"	25-1/2 TO 31-1/2"	28" TO 33"	24-1/2" TO 30"
PEAK WEIGHT	50, 60, 70#	60, 70#	60, 70#	60, 70#	60, 70, 80#	60, 70#
MASS WEIGHT	4.6 LBS.	4.3 LBS.	3.9 LBS.	4.1 LBS.	4.8 LBS.	3.9 LBS.
MAX LIMB BOLT TURNS FROM BOTTOM	10	10	7	7	13	10
COLOR OPTIONS	BREAK-UP® COUNTRY®, SKULLWORKS® 2, IMPERIAL PURPLE, PLATINUM, ELECTRIC LIME OR ALL BLACK	BREAK-UP® COUNTRY®, SKULLWORKS® 2 OR ALL BLACK				
PART NUMBER	1734HL	1735HL	1738HD	1531HD	1636DB	1330IC

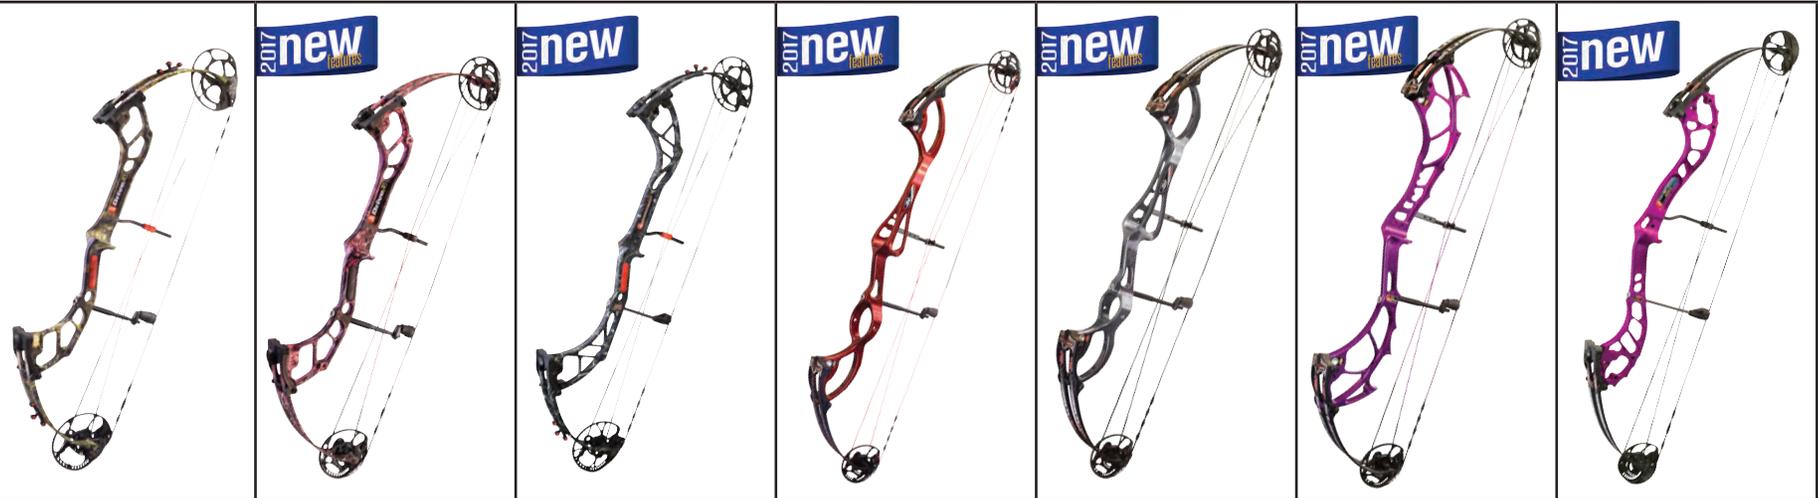

Drive R™

Drive R™ SD

Vendetta™ VX

Xpression™

Xpression™ 3D

Supra™ EXT

Phenom™ SD

ATA/IBO SPEED	336-328 FPS	312-304 FPS @28"	342-334 FPS	316-308 FPS	324-316 FPS	325-317 FPS	310-306 FPS @29"
BRACE HEIGHT	6-3/4"	6-1/4"	6"	7-1/8"	7"	7"	7"
AXLE-TO-AXLE	30"	30"	34-3/8	40"	36-1/2"	37"	35-1/2"
LETOFF %	75%	75%	80%	75% & 65%	75% & 65%	75% & 65%	75%
DRAW LENGTH RANGE	25" TO 30-1/2"	23" TO 28"	24-1/2" TO 30-1/2	26" TO 31-1/2"	25" TO 30-1/2"	25" TO 30-1/2"	23-1/2" TO 29"
PEAK WEIGHT	50, 60, 70#	40,50,60,70	50, 60, 70#	50, 60#	50, 60, 70#	40, 50, 60, 70#	40,50
MASS WEIGHT	3.8 LBS.	3.8 LBS.	4.1 LBS.	4.8 LBS.	4.7 LBS.	4.5 LBS.	4 LBS.
MAX LIMB BOLT TURNS FROM BOTTOM	13	13	13	13	13	13	13
COLOR OPTIONS	BREAK-UP® COUNTRY®, SKULLWORKS® 2 OR ALL BLACK	BREAK-UP® COUNTRY®, OR MUDDY GIRL	COUNTRY®, SKULLWORKS® 2 OR ALL BLACK	ELECTRIC LIME, IMPERIAL PURPLE, HIGH VOLTAGE, SCARLET RED, ADMIRAL BLUE, PEARL WHITE, BLACK ONYX OR PLATINUM	ELECTRIC LIME, IMPERIAL PURPLE, HIGH VOLTAGE, SCARLET RED, ADMIRAL BLUE, PEARL WHITE, BLACK ONYX OR PLATINUM	COUNTRY®, ELECTRIC LIME, IMPERIAL PURPLE, HIGH VOLTAGE, SCARLET RED, ADMIRAL BLUE, PEARL WHITE, BLACK ONYX OR PLATINUM	ELECTRIC LIME, IMPERIAL PURPLE, SCARLET RED, ADMIRAL BLUE, BLACK ONYX OR PLATINUM
PART NUMBER	1632DC / RTS: 1643DC	1632DM / RTS: 1643DM	1737MH	1634DM	1635DM	1636DM	1739MD



2017 PRO SERIES COMPOUND BOWS

TECHNOLOGY & INNOVATIONS

CARBON AIR® TECHNOLOGY



S-RAC
CORE TECHNOLOGY

PSE's S-RAC Technology Stops Vibration at the Core! The TrueCarbon™ shell of the PSE Carbon Air® is filled with our proprietary Structural Rigid Acoustic Core (S-RAC™) Technology. This lightweight fill material is designed to absorb and suppress vibration and noise at the bow's core, making the bow quiet on the shot and dead in your hand.

Unbelievably Light

Thanks to PSE's TrueCarbon™ shell and proprietary S-RAC™ core of the Carbon Air®, the bow weighs significantly less than other carbon or aluminum bows, while the titanium limb and pocket hardware also reduces weight by another 2.5 oz. This drops the physical weight of the Carbon Air® to an incredibly light 3.2 lbs., making it the lightest high-performance compound bow on the market.



The Exclusive "Arch Bridge" Riser Design

In addition to our new TrueCarbon™ and S-RAC™ technologies, PSE also set out to advance riser design with something that would create a fundamentally improved riser structure, making it amazingly strong and stable.

That's how the PSE Carbon Air® got its unique "arch bridge" design. Instead of pushing straight down, the weight load of an arch bridge is carried outward along the curve of the arch to the supports at each end. PSE engineers designed the Carbon Air® to do the exact same thing, offsetting the stress weight and producing an incredibly strong new riser design never before accomplished in a compound bow!

TRS TORQUE REDUCING SYSTEM

PSE's all-new Torque Reducing System (TRS)

is a cable guide designed to move the cable inward during the draw cycle and eliminate

torque, making for an incredibly stable draw and shot. The TRS is also highly adjustable for precise tuning and vane clearance, and is also designed to maintain high

performance under all weather conditions.

The TRS is designed to work with PSE's new

RollerGlide™ or a traditional cable slide.

TRS
TORQUE REDUCING SYSTEM



AIRGLIDE™ AND ROLLERGLIDE™ SYSTEMS

CARBON AIR
AIRGLIDE
CABLE GUARD™



Rest



Full Draw



The all-new PSE AirGlide™ Cable Guard is an amazing leap forward in cable guard technology. Exclusive to PSE's Carbon Air models, the AirGlide™ rolls and pivots with your cable angle, dramatically reducing cable friction and wear.

rollerglide
CABLE GUARD




The new PSE RollerGlide™ Cable Guard is the smoothest cable slide on the market, rolling with your cable to eliminate cable friction. Compatible with Flexxslide™ 1 and Flexxslide™ 2 bows, or any standard 3/8" diameter cable guard rod, the RollerGlide™ is a new leap forward in cable guard technology.

L.A.S. POCKET TECHNOLOGY

PSE shook up the target bow market last year with the first ever Lateral Adjustment System (L.A.S.) for compound bows, and for 2017 we are making it even better with our new Micro-Adjust Lateral Adjustment System!

The new Micro-Adjust L.A.S. offers even more robust tuning and makes it even easier to adjust your limb tips left or right with a single micro-adjusting screw. We've also made the Micro-Adjust L.A.S. even more reliable for 2017 to insure that your adjustments are locked securely into place and eliminating movement.

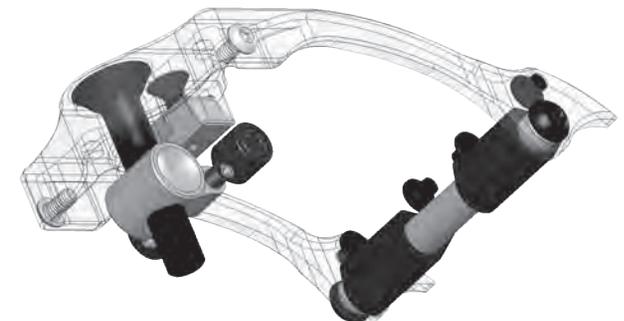

An Unbelievable Shooting Experience

Nothing compares to the all-new EVOLVE™ Cam System (ECS) from PSE! The ECS was engineered by PSE from the ground up to deliver maximum “shootability” with ZERO sacrifice in high performance. One shot and you’ll know that this is an amazing shooting experience unlike any cam you’ve ever shot before! The ECS smoothly eases you from peak weight into a deep valley before resting in a consistent and relaxed pocket with a rock solid back wall at up to 90% let-off. This allows you to hold and aim at full draw with unparalleled comfort and consistency.

The ECS also provides a greater string angle over two-track cam systems to provide maximum comfort and delivering the feel of a longer axle-to-axle bow to bows with a shorter length.

The Ultimate Quad-Track Cam System


Specially engineered to eliminate cam lean and lateral nock travel, our EVOLVE™ Cam System (ECS) features a quad-track cable design with split 3D cable grooves and a centered string tack to provide a more stable and accurate shot over two-track systems. These balanced string and cable forces deliver not only a better shot, but also create a system that is highly resistant to changes caused by environmental factors such as heat, cold, or humidity.

Easy to Adjust, Easy to Tune

The EVOLVE™ Cam System (ECS) is the easiest tuning cam we've ever made, but it's also the easiest to adjust! The ECS features rotating cam modules designed to give you maximum ease of adjustment with no bow press required for all let-off options and draw lengths. Our draw stop is designed to move with the module, and is adjustable for let-off options of 80%, 85%, and 90% with the standard module. The ECS is also available with an optional low let-off module for 65%, 70%, and 75% let-off options to increase speeds by up to 8 fps.

Maximum Comfort. Maximum Performance

There are other cams out there that offer 90% let-off, but they all sacrifice performance for comfort. Thanks to PSE’s all-new EVOLVE™ Cam System (ECS) and our incredible X-Force geometry, you no longer have to make that sacrifice. Bows featuring our ECS are still the hard hitting, high performance monsters you expect from PSE, but are also incomparably shootable.

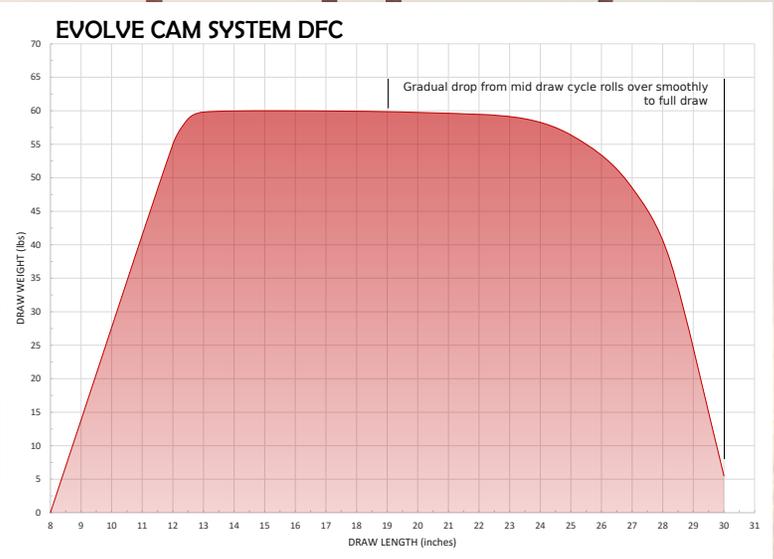



2017 PRO SERIES COMPOUND BOWS

PSE LIVEWIRE® STRINGS



PSE knows that a bow is only as good as the string and cables that you put on it. Historically, in order to make a quality bowstring you needed a really strong stringing operator placing as much tension on the string as possible and then serving the string. Unfortunately, humans are only so strong, and they get fatigued. Was your string made the first thing in the morning, or at the end of the day when the operator is tired?


That is why the best strings and cables were made by custom string makers, otherwise it was impossible to get the quality needed when mass producing strings... UNTIL NOW!

Our proprietary LiveWire™ bowstring machines use a fully automated, computer controlled process that is capable of stretching each individual strand of the string to the optimal tension - stretched to capacity but short of the point of creating fatigue. The machine then wraps the bundle under that optimal tension and serves the string under full load at tensions previously impossible to achieve.


In addition, LiveWire™ strings and cables use only the finest premium BCY materials available and builds each string from a single bundle of 452x string material and Halo serving material. The result is bowstrings and cables that are ultra-long lasting, have almost zero stretch, and virtually no peep rotation.

LiveWire premium strings and cables are the ultimate evolution of the bowstring, and the only strings and cables worthy of the PSE Pro Series name.

LIVEWIRE™ BOW STRINGS & CABLES

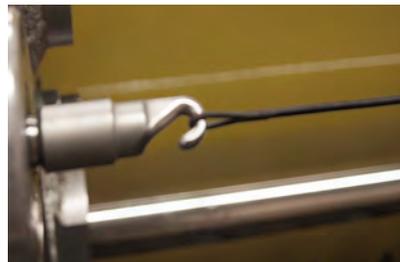

PSE's exclusive LiveWire™ bowstring machine stretches each individual strand to its optimal tension.

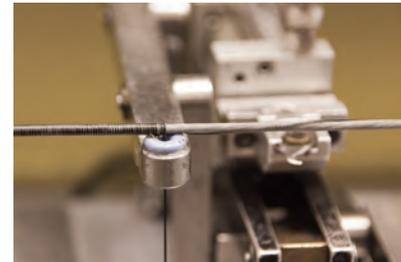

The LiveWire™ machine then wraps the string under full load, serving throughout the entire process at tensions previously impossible to achieve.




This automated process results in strings that have virtually zero stretch or peep rotation and are ultra-long lasting.



2017 PRO SERIES COMPOUND BOWS

CARBON AIR® 34 ECS

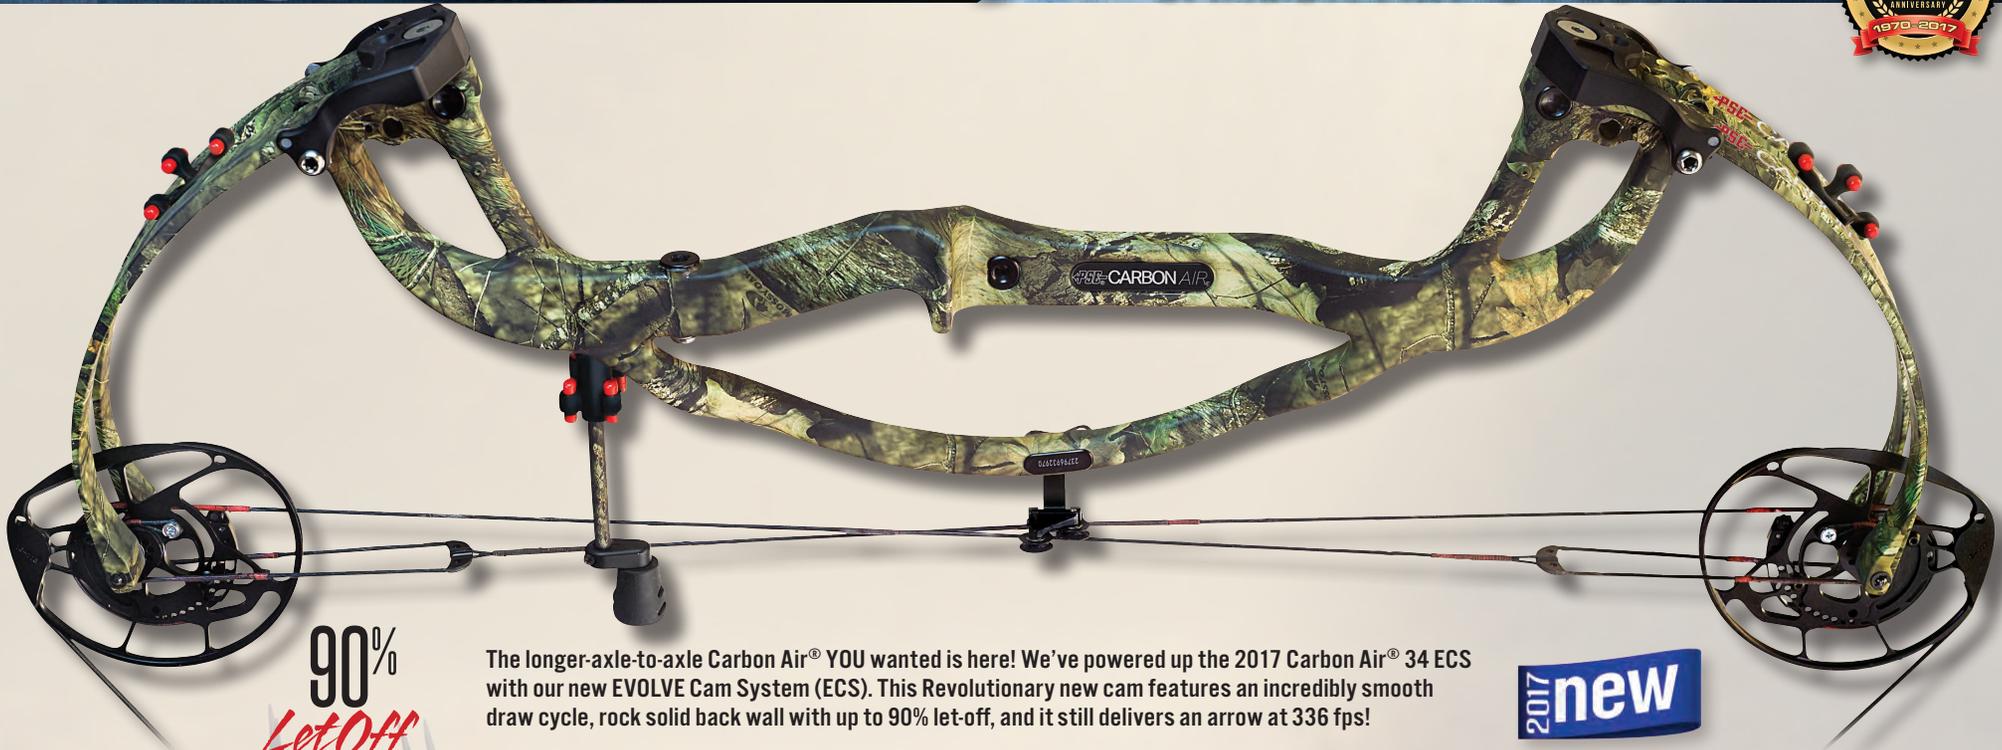

90%
Let Off

336 FPS

The longer-axle-to-axle Carbon Air® YOU wanted is here! We've powered up the 2017 Carbon Air® 34 ECS with our new EVOLVE Cam System (ECS). This Revolutionary new cam features an incredibly smooth draw cycle, rock solid back wall with up to 90% let-off, and it still delivers an arrow at 336 fps!

2017 **new**

The Carbon Air® 34 ECS also features our new AirGlide® cable guard for the ultimate in friction reduction and our Wide-Track Limb system for unparalleled shot stability, delivering a smooth, stable shot every time and giving you the lightest, strongest, and most SHOOTABLE carbon bow on the market!

Carbon Air® 34 ECS Specifications

Brace Height:.....	6-7/8"	Draw Length Range:.....	26" - 31-1/2"
Axle-to-Axle:.....	34"	Draw Weights (lbs.):.....	60, 65, 70
ATA/IBO Speed:.....	336-328	Max. Limb Bolt Turns From Bottom:.....	10 Turns
Letoff:.....	80%-90%	Shipped In:.....	29
Mass Weight:.....	3.6 lbs.	Cam.....	HL



CY
Mossy Oak Country®

BK/BC
All Black or
Black Riser/Camo Limbs

S2
PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
CARBON AIR®34 ECS	1731HL	CY,BK,BC,S2	26TO 31-1/2"	60, 65, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

CARBON AIR® 32 ECS



90%
Let Off

342 FPS

The ultimate carbon hunting bow has EVOLVED for 2017! We've powered up the 2017 Carbon Air® 32 ECS with our new EVOLVE® Cam System (ECS) to give it a buttery smooth draw cycle, hard back wall, and an unbelievable 90% let-off that you'll have to feel to believe! This bow is amazingly comfortable to draw and hold at full draw with rock solid aim, and thanks to our new AirGlide® cable guard system, every draw is free of unnecessary string friction. The Carbon Air® 32 ECS also doesn't sacrifice speed for the incredible feel either, shooting an amazing 342 fps!

2017 **new**

Carbon Air® 32 HL Specifications

Brace Height:.....	6-3/8"	Draw Length Range:.....	24-1/2" - 30"
Axle-to-Axle:.....	31-1/2"	Draw Weights (lbs.):.....	60, 70
ATA/IBO Speed:.....	342-334	Max. Limb Bolt Turns From Bottom:.....	10 Turns
Letoff:.....	80%-90%	Shipped In:.....	29
Mass Weight:.....	3.3 lbs.	Cam.....	HL



CY
Mossy Oak Country®

BK/BC
All Black or
Black Riser/Camo Limbs

S2
PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
CARBON AIR®32 ECS	1631HL	CY,BC,BK,S2	24-1/2 TO 30"	60, 65, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

CARBON AIR® HD



The carbon bow that took the archery world by storm is back! Engineered with PSE True Carbon™ technology to be the lightest and strongest carbon bow on the market, the Carbon Air is a true performer with an HD Hybrid cam that delivers a smooth draw cycle, while our new AirGlide® cable guard system insures that every draw is free of unnecessary string friction. The Carbon Air®HD also features our Center Lock Speed Pocket and X-Force™ limb technology, giving it the energy to fire arrows at a blazing 340 fps!

340 FPS

The Carbon Air®HD is also dead quiet and comfortable in your hand, with PSE's proprietary S-RAC core suppressing noise and vibration, as well as acting with the carbon as an insulator against the heat and cold.

Carbon Air® Specifications

Brace Height:.....	6-1/8"	Draw Length Range:.....	24-1/2" - 30-1/2"
Axle-to-Axle:.....	32"	Draw Weights (lbs.):.....	50, 60, 65, 70
ATA/IBO Speed:.....	340-332 fps	Max. Limb Bolt Turns From Bottom:.....	7 Turns
Letoff:.....	80%	Shipped In:.....	29
Mass Weight:.....	3.2 lbs.	Cam.....	HD



CY Mossy Oak Country®

BK/BC All Black or Black Riser/Camo Limbs

S2 PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
CARBON AIR® 32	1631HD	CY, BC, BK, S2	24-1/2 TO 30-1/2"	50, 60, 65, 70#



2017 PRO SERIES COMPOUND BOWS

EVOLVE®



90%
Let Off

346 FPS

Evolve your hunt with the 2017 PSE Evolve®! Engineered from the ground up to be the most comfortable hunting bow we've ever made, we started with our amazing new EVOLVE® Cam System (ECS), which gives this hunting bow an unbelievable 90% let-off and the smoothest shot on the market.

But PSE wasn't done yet...we paired the ECS with our all-new ultra stiff forged riser design for amazing rigidity and shot stability, our Wide-Track Limb System and Wedge Lock™ Speed Pocket for deadeye accuracy and 346 fps of shooting power, and topped it all off with our new RollerGlide® cable guard system to eliminate friction. We also added built-in riser stabilization ports to deliver a bow that is pure shooting nirvana!

2017 new

Evolve® Specifications

Brace Height:.....	6-1/4"	Draw Length Range:.....	24-1/2" - 30"
Axle-to-Axle:.....	31"	Draw Weights (lbs.):.....	60, 70
ATA/IBO Speed:.....	346-338 fps	Max. Limb Bolt Turns From Bottom:.....	10 Turns
Letoff:.....	80%-90%	Shipped In:.....	29
Mass Weight:.....	4.3 lbs.	Cam.....	HL



EVOLVE
cam system

FLEXSLIDE 2



PSE skullworks 2



CY
Mossy Oak Country®



BK
Black



S2
PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
EVOLVE®	1735HL	CY, BK, S2	24-1/2 TO 30"	60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

EVOLVE® 35



90%
Let Off

340 FPS

Evolve your hunt with the 2017 PSE Evolve™ 35! Engineered from the ground up to be the most comfortable hunting bow we've ever made, we started with our amazing new EVOLVE™ Cam System (ECS), which gives this 35" axle-to-axle hunting bow an unbelievable 90% let-off and the smoothest shot on the market.

But PSE wasn't done yet...we paired the ECS with our all-new ultra stiff forged riser design for amazing rigidity and shot stability, our Wide-Track Limb System and Wedge Lock™ Speed Pocket for deadeye accuracy and 340 fps of shooting power, and topped it all off with our new RollerGlide® cable guard system to eliminate friction. We also added built-in riser stabilization ports to make shooting this bow an experience you'll never forget!

2017 **new**

Matte Finish

Evolve® 35 Specifications

Brace Height:.....	6-1/2"	Draw Length Range:.....	26" - 31-1/2"
Axle-to-Axle:.....	35"	Draw Weights (lbs.):.....	50, 60, 70
ATA/IBO Speed:.....	340-332 fps	Max. Limb Bolt Turns From Bottom:.....	10 Turns
Letoff:.....	80%-90%	Shipped In:.....	29
Mass Weight:.....	4.6 lbs.	Cam.....	HL



EVOLVE
cam system



PSE
skullworks 2

FLEXSLIDE 2



CY Mossy Oak Country® BK Black S2 PSE Skullworks® PR Imperial Purple PT Platinum GN Electric Lime

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
EVOLVE® 35	1734HL	CY, BK, S2	26 TO 31-1/2"	60, 70#
EVOLVE® 35	1734HL	PR, PT, GN	26 TO 31-1/2"	50, 60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

DECREE® 35 HD



The Decree® HD delivers rock solid performance for archers who like a longer bow. With its 35" axle-to-axle and a 6 1/2" brace height, the Decree® HD 35 hits the sweet spot for the shooter who spends serious time on the hunt and on the target range. With its special 3D structural riser for increased rigidity and stability, and shooting speeds of up to 338 fps with a smooth draw and 80% let-off, the Decree® HD delivers the legendary PSE performance you need!

338 FPS

Decree® 35 HD Specifications

Brace Height:.....	6-1/2"	Draw Length Range:.....	25-1/2" - 31-1/2"
Axle-to-Axle:.....	35"	Draw Weights (lbs.):.....	60, 70
ATA/IBO Speed:.....	338-330 fps	Max. Limb Bolt Turns From Bottom:	7 Turns
Letoff:.....	80%	Shipped In:	29"
Mass Weight:.....	4.1 lbs.	Cam:	HD

FLEXSLIDE 2

HD
cam system

BACKSTOP 4

PSE
skullworks 2

LIVEWIRE
BOW STRINGS & CABLES

BREAK-UP
COUNTRY
MOSSY OAK



CY
Mossy Oak Country®

BK
Black

S2
PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
-------	--------	--------------	-------------	-------------

DECREE™ 35 HD	1531HD	CY, BK, S2	25-1/2 TO 31-1/2"	60, 70#
---------------	--------	------------	-------------------	---------

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

DECREE® 32 HD



2017 **new**

We've taken the original PSE Decree and made this workhorse whitetail bow even better with our smooth shooting HD Cam! Built on a 7075 forged aluminum riser, the Decree's special structural design increases stability and rigidity, making for a steady and precise shooting experience each and every time. You've only got seconds to make your shot, so make it count with the 2017 PSE Decree HD 32!

340 FPS

Decree® 32 HD Specifications

Brace Height:.....6"	Draw Length Range:.....24-1/2" - 30-1/2"
Axle-to-Axle:.....32"	Draw Weights (lbs.):.....60, 70
ATA/IBO Speed:.....340-332 fps	Max. Limb Bolt Turns From Bottom:7 Turns
Letoff:.....80%	Shipped In:29"
Mass Weight:.....3.9 lbs.	Cam:HD

FLEXSLIDE 2

HD cam system

BACKSTOP 4

PSE skullworks 2

LIVEWIRE BOW STRINGS & CABLES

BREAK-UP COUNTRY MOSBY OAK



CY Mossy Oak Country®

BK Black

S2 PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
DECREE™ 32 HD	1738HD	CY,BK,S2	24-1/2 TO 30-1/2"	60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

FULL THROTTLE™



The fastest, most powerful bow in the world still reigns supreme in 2017! The PSE Full Throttle™ is a true feat of precision engineering...shooting at a lightning fast 370 fps with deadly accuracy. Engineered with PSE's patented X-Technology, shooting the Full Throttle™ means not having to pull as many pounds to get the performance you're looking for, and with our pre-loaded, parallel limbs you get a clean and forgiving shot from a short brace height.

370 FPS

Full Throttle™ Specifications

Brace Height:.....	5-1/4"	Draw Length Range:.....	26-1/2" - 30"
Axle-to-Axle:.....	33-1/4"	Draw Weights (lbs.):.....	50, 60, 65, 70
ATA/IBO Speed:.....	370 - 362 fps	Max. Limb Bolt Turns From Bottom:.....	7 Turns
Letoff:.....	70%	Shipped In:.....	DL Specific*
Mass Weight:.....	4.1 lbs.	Cam.....	FT

FLEXSLIDE 2

PSE skullworks 2

BACKSTOP 4

BREAK-UP COUNTRY MOSSY OAK

Pt PLATINUM SERIES

HANDCRAFTED IN THE USA



CY Mossy Oak Country®

BK Black

S2 PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
FULL THROTTLE™	1431FT	CY,BK,S2	26-1/2 TO 30"	50, 60, 65, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

BEAST™ EXT



The PSE Beast™ EXT was engineered to be the ultimate long-draw bow. Featuring PSE's revolutionary new Wide-Track™ Target Limbs and Micro Adjust LAS, the Beast EXT features a 38" axle-to-axle, a 7 1/4" brace height, and is ready to take down a target or a whitetail at up to 350 fps. With its forged riser, Drive™-style target cam, and our new RollerGlide® cable guard system designed to eliminate friction, the Beast EXT provides a stable, rigid, and silky smooth shot with an 80% let-off. Additionally, the all-new Wedge Lock™ limb pocket and improved Micro-Adjust Limb Adjustment System allows for fast, easy adjustment with its elegant lead screw design.

350 FPS

Beast™ EXT Specifications

Brace Height:	7-1/4"	Draw Length Range:	28" - 33"
Axle-to-Axle:	38"	Draw Weights (lbs.):	60, 70, 80
ATA/IBO Speed:	350-342 @ 33" / 320-312 @ 30"	Max. Limb Bolt Turns From Bottom:	13 Turns
Letoff:	80% / 65%	Shipped In:	32"
Mass Weight:	4.8 lbs.	Cam:	DB



CY
MOSSY OAK® COUNTRY®



S2
PSE SKULLWORKS® 2



BK
BLACK ONYX

MODEL	PART #	COLORS	DRAW LENGTH	PEAK WEIGHT
BEAST™ EXT	1636DB	CY, S2, BK	28 TO 33"	60, 70, 80#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

INERTIA™



348 FPS

Looking for the perfect balance of pro-level performance and price? Then the PSE Inertia™ is the bow to beat! Featuring the high-performance 75% let-off IC Cam, the Inertia™ shoots arrows with speeds up to 348 fps while still providing a smooth draw and solid back wall. With a 6" brace height, an axle-to-axle of 31-3/8", and a mass weight of only 3.9 lbs., the Inertia™ is a great Pro Series hunting bow at a great price.

Inertia™ Specifications

Brace Height:.....6"	Draw Length Range:.....24-1/2" - 30"
Axle-to-Axle:.....31-3/8"	Draw Weights (lbs.):.....60, 70
ATA/IBO Speed:.....348-340 fps	Max. Limb Bolt Turns From Bottom:.....10 Turns
Letoff:.....75%	Shipped In:.....29"
Mass Weight:.....3.9 lbs.	Cam.....IC

LIVEWIRE
BOW STRINGS & CABLES

FLEXSLIDE 2

PSE skullworks 2

BREAK-UP
COUNTRY
MOSSY OAK

HANDCRAFTED IN THE
USA



CY
Mossy Oak Country®

BK
Black

S2
PSE Skullworks®

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
INERTIA™	1330IC	CY, BK, S2	24-1/2 TO 30"	60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

DRIVE R™



2017 new features



336 FPS

The 2017 PSE Drive R™ is the best compound bow value on the pro market! Featuring the super smooth Drive Hybrid Cam, and PSE X-Tech™ split limb technology, the PSE Drive R™ delivers a comfortable draw and a smooth shot of speeds up to 336 fps. It's also a smooth performer with a 75% let-off and a draw length adjustability of 25" to 30 1/2". The Drive R™ is the perfect bow for those who want Pro Series level performance without breaking the bank.

Drive R™ Specifications

Brace Height:.....	6-3/4"	Draw Length Range:.....	25" - 30-1/2"
Axle-to-Axle:.....	30"	Draw Weights (lbs.):.....	50, 60, 70
ATA/IBO Speed:.....	336-328 fps	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	75%	Shipped In:.....	29"
Mass Weight:.....	3.8 lbs.	Cam.....	DC



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
DRIVE R™	1632DC	BK, CY, S2	25 TO 30-1/2"	50, 60, 70#
DRIVE R™ PRO PKG	1643DC	CY, S2	25 TO 30-1/2"	60, 70#

PRO PACKAGE INCLUDES: AMP PRO SIGHT, PHANTOM DROPAWAY REST, SPIRE STABILIZER, RAVEN QUIVER, PSE NEOPRENE SLING, RED ALUMINUM PEEP AND NOCK LOOP



BK Black, CY Mossy Oak Country®, S2 PSE Skullworks®

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOW

DRIVE R™ SD



312 FPS

Now the best compound bow value on the pro market is available in a shorter draw model! Perfect for shooters looking for something a little more compact, the 2017 DriveR™ SD features a 6 1/4" brace height, a draw length range of 23"-28" and is available in peak weights down to 40#! The Drive R™ SD is the perfect short draw bow for those who want Pro Series level performance without breaking the bank.

2017 **new** features

Drive-R™ SD Specifications

Brace Height:.....	6-1/4"	Draw Length Range:.....	23" - 28"
Axle-to-Axle:.....	30"	Draw Weights (lbs.):.....	40, 50, 60, 70
ATA/IBO Speed:.....	312-304 fps @28"	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	75%	Shipped In:.....	25"
Mass Weight:.....	3.8 lbs.	Cam.....	SD

LIVEWIRE
BOW STRINGS & CABLES



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
DRIVE-R™ SD	1632DM	CY	23 - 28"	50, 60, 70#
DRIVE R™ SD PKG	1643DM	CY	23 - 28"	50, 60, 70#
DRIVE-R™ SD	1632DM	MG	23 - 28"	40, 50#
DRIVE R™ SD PKG	1643DM	MG	23 - 28"	40, 50#

PRO PACKAGE INCLUDES: AMP PRO SIGHT, PHANTOM DROPAWAY REST SPIRE STABILIZER, RAVEN QUIVER, PSE NEOPRENE SLING, RED ALUMINUM PEEP AND NOCK LOOP



CY
Mossy Oak® Country®

MG
Muddy Girl® Reduced

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

VENDETTA™ VX



The PSE Vendetta™ is back with the 2017 Vendetta™ VX. The Vendetta™ VX features the high-performance VX Drive Style Hybrid Cam, delivering power, precision, and unbelievable ease of adjustment at an amazing price point! It's also wicked fast at 342 fps!

Combine that with an all-new forged riser for increased rigidity and stability and the Vendetta™ VX delivers unmatched stability and shooting comfort in a Pro Series bow at this price point.

2017 **new**

342 FPS

Vendetta™ VX Specifications

Brace Height:.....6"	Draw Length Range:.....24-1/2" - 30-1/2"
Axle-to-Axle:.....34-3/8"	Draw Weights (lbs.):.....50, 60, 70
ATA/IBO Speed:.....342-334 fps	Max. Limb Bolt Turns From Bottom:.....13 Turns
Letoff:.....80%	Shipped In:.....29"
Mass Weight:.....4.1 lbs.	Cam.....MH

LIVEWIRE
BOW STRINGS & CABLES

PSE
skullworks²

BREAK-UP
COUNTRY
MOSSY OAK

HANDCRAFTED IN THE
USA



CY
Mossy Oak Country®



BK
Black



S2
PSE Skullworks® 2

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
VENDETTA™ VX	1737MH	CY, BK, S2	24-1/2 TO 30-1/2"	50, 60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

XPRESSION™



PSE re-established itself as the leader in target bows with the PSE Xpression™, and the bow is back and better than ever for 2017! Engineered with PSE's revolutionary Wide-Track™ Target Limbs, all-new Micro-Adjust Limb Adjustment System, and our new RollerGlide® cable guard and TRS cable guide to eliminate friction and torque, the Xpression™ is the ultimate target bow... ready for any and all competition. The Xpression™ also features a Drive™ style target cam, which provides a silky smooth shot and ideal adjustability. This is a bow that conforms to the way YOU shoot, so the Xpression™ also allows for a cable stop, limb stop, or aftermarket hard stop, and has a highly adjustable back wall.

2017 new features

316 FPS

Xpression™ Specifications

Brace Height:.....	7-1/8"	Draw Length Range:.....	26" - 31-1/2"
Axle-to-Axle:.....	40"	Draw Weights (lbs.):.....	50, 60
ATA/IBO Speed:.....	316 - 308 fps	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	75% / 65%	Shipped In:.....	29"
Mass Weight:.....	4.8 lbs.	Cam.....	DM



GN ELECTRIC LIME PR IMPERIAL PURPLE YL HIGH VOLTAGE RD SCARLET RED BL ADMIRAL BLUE PW PEARL WHITE BK BLACK ONYX PT PLATINUM

MODEL	PART #	COLORS	DRAW LENGTH	PEAK WEIGHT
XPRESSION™	1634DM	GN, PR, YL, RD, BL, PW, BK, PT	26 TO 31-1/2"	50, 60#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

XPRESSION™ 3D



PSE quickly became the new leader in 3D target bows with the PSE Xpression™ 3D. Engineered with PSE's revolutionary Wide-Track™ Target Limbs, all-new Micro-Adjust Limb Adjustment System, and our new RollerGlide® cable guard and TRS cable slide to eliminate friction and torque, the Xpression 3D features a shorter, 36-1/2" axle-to-axle for 3D shooting. Shooting at 324 fps, this IS the ultimate 3D bow...ready for any and all competition.

The Xpression™ 3D also features a new DM Hybrid target cam system, which provides a silky smooth shot and ideal adjustability.

2017 **new** features

324 FPS

Xpression™ 3D Specifications

Brace Height:.....7"	Draw Length Range:.....25" - 30-1/2"
Axle-to-Axle:.....36-1/2"	Draw Weights (lbs.):.....50, 60, 70
ATA/IBO Speed:.....324 - 316 fps	Max. Limb Bolt Turns From Bottom:.....13 Turns
Letoff:.....75% / 65%	Shipped In:.....29"
Mass Weight:.....4.8 lbs.	Cam.....DM



GR ELECTRIC LIME PR IMPERIAL PURPLE YL HIGH VOLTAGE RD SCARLET RED BL ADMIRAL BLUE PW PEARL WHITE BK BLACK ONYX PT PLATINUM

MODEL	PART #	COLORS	DRAW LENGTH	PEAK WEIGHT
XPRESSION™ 3D	1635DM	GN, PR, YL, RD, BL, PW, BK, PT	25 TO 30-1/2"	50, 60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

SUPRA™ EXT



The Supra™ EXT rocked the outdoor target shooting world last year, and it's back and better than ever for 2017! Featuring PSE's revolutionary new Wide-Track™ Target Limbs and new RollerGlide® cable guard and TRS cable slide to eliminate friction and torque, this target bow is nothing short of impressive. With its forged riser and Drive™ style cam, the Supra™ EXT provides a stable, rigid, and silky smooth shot with an 75% and 65% let-off, while the Wedge Lock™ limb pocket and improved Micro Adjust Lateral Adjustment System allows for fast, easy adjustment with its elegant lead-screw design.

2017 **new** features

325 FPS

Supra™ EXT Specifications

Brace Height:.....7"	Draw Length Range:.....25" - 30-1/2"
Axle-to-Axle:.....37"	Draw Weights (lbs.):.....40, 50, 60, 70
ATA/IBO Speed:.....325-317 fps	Max. Limb Bolt Turns From Bottom:.....13 Turns
Letoff:.....75%/65%	Shipped In:.....29"
Mass Weight:.....4.7 lbs.	Cam.....DM



GR ELECTRIC LIME GREEN	PR IMPERIAL PURPLE	YL HIGH VOLTAGE	RD SCARLET RED	BL ADMIRAL BLUE	WH PEARL WHITE	BK BLACK ONYX	PT PLATINUM	CY COUNTRY® CAMO
------------------------------	--------------------------	-----------------------	----------------------	-----------------------	----------------------	---------------------	----------------	------------------------

MODEL	PART #	COLORS	DRAW LENGTH	PEAK WEIGHT
SUPRA™ EXT	1636DM	GN, PR, YL, RD, BL, PW, BK, PT	25 TO 30-1/2"	40, 50, 60#
SUPRA™ EXT	1636DM	CY	25 TO 30-1/2"	60, 70#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

PHENOM™ SD



The PSE Phenom™ SD has been seriously upgraded for 2017 with a sleek new deflexed riser, making it lighter, more accurate, and more forgiving! The only short-draw performance target bow on the market at this price, the Phenom™ SD features an upgraded Mini Drive™ Cam for a firm back wall, high adjustability, and a great shot every time. With its X-Technology™, pivoting limb pockets, and Raptor™ grip, shooting the Phenom™ SD delivers a phenomenal shooting experience for young target archers at a PHENOMenal price.

2017 **new**

310 FPS

Phenom™ SD Specifications

Brace Height:..... 7"	Draw Length Range:..... 23-1/2" to 29"
Axle-to-Axle:..... 35-1/2"	Draw Weights (lbs.):..... 40, 50
ATA/IBO Speed:..... 310-306 fps @29"	Max. Limb Bolt Turns From Bottom:..... 13 Turns
Letoff:..... 75%	Shipped In:..... 25"
Mass Weight:..... 4.0 lbs.	Cam..... MD

LIVEWIRE
BOW STRINGS & CABLES



Matte Finish



GR ELECTRIC LIME PR IMPERIAL PURPLE RD SCARLET RED BL ADMIRAL BLUE BK BLACK ONYX PT PLATINUM

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
PHENOM™ SD	1739MD	GN, PR, RD, BL, BK, PT	23-1/2 TO 29"	40, 50#

EXPERIENCE . PERFORMANCE .



2017 PRO SERIES COMPOUND BOWS

BOW DATA SPECIFICATIONS

2017 PSE PRO SERIES DRAW SETTING CHART

PEAK WEIGHT	CARBON AIR 34 HL	CARBON AIR 32 HL	CARBON AIR 32 HD	FULL THROTTLE	EVOLVE 35	EVOLVE	DECREE 32	DECREE 35	BEAST EXT	INERTIA	DRIVE R DC	DRIVE R SD	VENDETTA PRO	XPRESSION	XPRESSION 3D	SUPRA EXT	PHENOM XT SD	
LIMB BOLT TURNS:	10	10	7	7	10	10	7	7	13	10	13	13	13	13	13	13	13	
% ADJUST FROM PEAK	26%	26%	23%	23%	26%	26%	23%	23%	20%	20%	33%	33%	33%	20%	20%	20%	33%	
80 lbs.									80 to 64									
70 lbs.	70 TO 51.5	70 TO 51.5	70 to 54	70 to 54	70 TO 51.5	70 TO 51.5	70 TO 54	70 to 54	70 to 56	70 to 56	70 to 47	70 to 47	70 to 47	70 to 56	70 to 56			
65 lbs	65 TO 48	65 TO 48	65 to 50	65 to 50	65 TO 48			65 to 50										
60 lbs.	60 TO 44.5	60 TO 44.5	60 to 46	60 to 46	60 TO 44.5	60 TO 44.5	60 TO 46	60 to 46	60 to 48	60 to 48	60 to 40	60 to 40	60 to 40	60 to 48	60 to 48	60 to 48	60 to 40	
50 lbs.			50 to 38.5	50 to 38.5	50 TO 37			50 to 38.5		50 to 40	50 to 33.5	50 to 33.5	50 to 33.5	50 to 40	50 to 40	50 to 40	50 to 33.5	
40 lbs.											40 to 26.5					40 to 32	40 to 26.5	
2017 PSE PRO SERIES DRAW SETTINGS	CARBON AIR 34	CARBON AIR 32 HL	CARBON AIR 32 HD	FULL THROTTLE	EVOLVE 35	EVOLVE	DECREE 32	DECREE 35	BEAST EXT	INERTIA	DRIVE R DC	DRIVE R SD	VENDETTA PRO	XPRESSION	XPRESSION 3D	SUPRA EXT	PHENOM XT SD	
A	31 1/2	30	30 1/2	The PSE Full Throttle has cam specific draw length range from 26 1/2" to 30" in 1/2" increments.	31 1/2	30	30 1/2	31 1/2	33	30	30 1/2	28	30 1/2	31 1/2	30 1/2	30 1/2	29	
B	31	29 1/2	30		31	29 1/2	30	31	32 1/2	29 1/2	30	27 1/2	30	31	30	30	30	28 1/2
C	30 1/2	29	29 1/2		30 1/2	29	29 1/2	30 1/2	32	29	29 1/2	27	29 1/2	30 1/2	29 1/2	29 1/2	29 1/2	28
D	30	28 1/2	29		30	28 1/2	29	30	31 1/2	28 1/2	29	26 1/2	29	30	29	29	29	27 1/2
E	29 1/2	28	28 1/2		29 1/2	28	28 1/2	29 1/2	31	28	28 1/2	26	28 1/2	29 1/2	28 1/2	28 1/2	28 1/2	27
F	29	27 1/2	28		29	27 1/2	28	29	30 1/2	27 1/2	28	25 1/2	28	29	28	28	28	26 1/2
G	28 1/2	27	27 1/2		28 1/2	27	27 1/2	28 1/2	30	27	27 1/2	25	27 1/2	28 1/2	27 1/2	27 1/2	27 1/2	26
H	28	26 1/2	27		28	26 1/2	27	28	29 1/2	26 1/2	27	24 1/2	27	28	27	27	27	25 1/2
I	27 1/2	26	26 1/2		27 1/2	26	26 1/2	27 1/2	29	26	26 1/2	24	26 1/2	27 1/2	26 1/2	26 1/2	26 1/2	25
J	27	25 1/2	26		27	25 1/2	26	27	28 1/2	25 1/2	26	23 1/2	26	27	26	26	26	24 1/2
K	26 1/2	25	25 1/2		26 1/2	26 1/2	25	26 1/2	28	25	25 1/2	23	25 1/2	26 1/2	25 1/2	25 1/2	25 1/2	24
L	26	24 1/2	25		26	24 1/2	25	26		24 1/2	25			25	26	25	25	23 1/2
M			24 1/2					24 1/2	25 1/2					24 1/2				

PSE Pro Series String Information

*NOTE: bows with America's Best Bowstrings purchased direct from ABB. All PSE string lengths can be found on our website: www.psearchery.com

- 2017 SBC146
- 2017 SBC147
- 2016 SBC139
- 2016 SBC144
- 2016 SBC140
- 2016 SBC142
- 2016 SBC128
- 2016 SBC109
- 2016 SBC143
- 2016 SBC110
- 2016 SBC138
- 2015 SBC117

- SBC,DRIVE,R,SD,2017
- SBC,VDETTA,2017,MH
- SBC,BEAST,2016,PREM
- SBC,DRIVER,DC,2016,PREM
- SBC,INERTIA,2016,PREM
- SBC,PHENOM,MD,2016,PREM
- SBC,PHENOM,SD,MD
- SBC,PREMO,HD
- SBC,PREMO,HD,2016,PREM
- SBC,PREMO,STILETTO,HD
- SBC,SUPRA,2016,PREM
- SBC,DRIVE,2015,DC

- 2015 SBC107
- 2015 SBC118
- 2015 SBC111
- 2014 SBC818
- 2014 SBC666
- 2014 SBC616
- 2014 SBC125
- 2014 SBC135
- 2013 SBC115
- 2013 SBC888
- 2012 SBC999
- 2012 SBC777

- SBC,DRIVELT,DC2015
- SBC,PHENOM,ME
- SBC,SOURCE,HD
- SBC,PREMONITION,SC
- SBC,REVENGE,DC
- SBC,SOURCE,SC
- SBC,VERGE,MD
- SBC,VERGE,STILETTO,MD
- SBC,2013,STILETTO,ME
- SBC,VENDETTA,DC
- SBC,2012,STILETTO,ME
- SBC,SUPRA,ME



2017 MAINLINE COMPOUND BOWS

BOW SUMMARY



2017 new



2017 new



2017 new



Bow Madness[®] Epix[®]

Brute Force[™] Lite

Infinity[®]

Stinger[™] X / Stiletto

ATA/IBO SPEED	340-332 FPS	332-324 FPS	325-317 FPS	316-308 FPS
BRACE HEIGHT	6"	7"	7"	7-1/8"
AXLE-TO-AXLE	32"	30-1/2"	30"	32-1/2"
LETOFF %	80%	80%	80%	75%
DRAW LENGTH RANGE	24" TO 30"	25 TO 31"	24-1/2" TO 30-1/2"	21" TO 30"
PEAK WEIGHT	60, 70	50, 60, 70	50, 60, 70	40, 50, 60, 70
MASS WEIGHT	4 LBS.	3.8 LBS.	3.8 LBS.	3.5 LBS.
MAX LIMB BOLT TURNS FROM BOTTOM	13	15	15	13
COLOR OPTIONS	MOSSY OAK [®] COUNTRY [®] , ALL BLACK OR SKULLWORKS [®] 2	MOSSY OAK [®] COUNTRY [®] , ALL BLACK OR SKULLWORKS [®] 2	MOSSY OAK [®] COUNTRY [®] , OR SKULLWORKS [®] 2	BLACK LIMBS ON ALL COUNTRY [®] , BLACK, SKULLWORKS [®] 2, BLUE S2, DESERT TAN S2, RED S2, PURPLE OR MUDDY GIRL
BOW ONLY PART #	1701MH	1702MH	N/A	1504SX
RTS PACKAGE PART #	1711MH	1712MH (RTS) / 1713MH (RTS PRO)	1733IF	1514SX (RTS) / 1517SX (RTS PRO)
FR PKG PART #	1721MH	1722MH	1743IF	1524SX



Fever™



Mini Burner™ XT



Discovery™ 2



Phenom™ XT



ATA/IBO SPEED	304-296 FPS @29"	280-272 FPS @ 28"	N/A	345-338 FPS @ 33" / 315-307 FPS @ 30"
BRACE HEIGHT	6-3/8"	7-1/4"	6-1/2"	7-5/8"
AXLE-TO-AXLE	32"	26-1/2"	31-1/2"	35-1/2"
LETOFF %	70%	70%	N/A	75%
DRAW LENGTH RANGE	11" TO 29"	11" TO 28"	UP TO 30"	27-1/2 TO 33"
PEAK WEIGHT	29, 40, 50, 60	20, 29, 40, 50	20, 29	40, 50, 60, 70
MASS WEIGHT	3.4 LBS.	2.5 LBS.	2.7 LBS.	4.0
MAX LIMB BOLT TURNS FROM BOTTOM	13	8	6	13
COLOR OPTIONS	COUNTRY® LIMBS/BLACK RISER, PURPLE RISER/BLACK LIMBS, OR SKULLWORKS® LIMBS/BLACK RISER	COUNTRY® LIMBS/BLACK RISER, PURPLE RISER/BLACK LIMBS, OR SKULLWORKS® LIMBS/BLACK RISER	HAMMERTONE BLUE RISER /BLACK LIMBS OR HAMMERTONE RED RISER /BLACK LIMBS	ELECTRIC LIME, IMPERIAL PURPLE, SCARLET RED, ADMIRAL BLUE, BLACK ONYX, PLATINUM, MOSSY OAK® COUNTRY®
BOW ONLY PART #	1405VS	1602VS	1704BZ	1739DC
RTS PACKAGE PART #	1415VS	1612VS	N/A	N/A



2017 MAINLINE COMPOUND BOWS

BOW MADNESS® EPIX®



2017 new



Black available as bow only.
Shown with optional accessories.

Drury Outdoors delivers the most epic whitetail hunts, so PSE knew we had to deliver an epic bow to live up to the Bow Madness™ name! The 2017 PSE Bow Madness™ Epix is an all-new high performance compound bow built from the ground up with an exclusive new angled-plane riser designed to deliver maximum rigidity and stiffness for an ultra-stable shot.

The Bow Madness™ Epix is a true whitetail killer, perfect for the blind or tree stand with a 32" axle-to-axle, and a shooting speed of 340 fps on a smooth draw with an amazing 80% let-off!

Bow Madness® Epix® Specifications

Brace Height:.....6"	Draw Length Range:.....24 - 30"
Axle-to-Axle:.....32"	Draw Weights (lbs.):.....60, 70
ATA/IBO Speed:.....340-332 fps	Max. Limb Bolt Turns From Bottom:.....13 Turns
Letoff:.....80%	Shipped In:.....29
Mass Weight:.....4 lbs.	Cam.....MH

340 FPS

Right Hand Only



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
BOW MADNESS® EPIX®	1701MH	CY,BK,S2	24 TO 30"	60, 70#
READY TO SHOOT	1711MH	CY,S2	24 TO 30"	60, 70#
FIELD READY	1721MH	CY	24 TO 30"	60, 70#

READY TO SHOOT (RTS) INCLUDES: AMP MICRO SIGHT, PHANTOM DROP-AWAY REST, SPIRE STABILIZER, RAVEN QUIVER, PSE NEOPRENE SLING, RED ALUMINUM PEEP SIGHT AND NOCK LOOP
FIELD READY (FR) INCLUDES: ALL READY TO SHOOT ACCESSORIES ABOVE PLUS: TRUE-FIRE HURRICANE RELEASE, SUPREME BOWCASE AND A 4-PACK OF PSE X-WEAVE ARROWS



CY Mossy Oak® Country® BK Black S2 PSE Skullworks® 2



2017 MAINLINE COMPOUND BOWS

PHENOM™ XT



2017 new



The PSE Phenom™ XT is an all-new Phenom for 2017, featuring a sleek new deflexed riser, making it lighter, more accurate, and more forgiving! The only performance target bow on the market at this price, the Phenom™ XT features an upgraded Drive™ Cam for a firm back wall, high adjustability, and a great shot every time. With its X-Technology™, pivoting limb pockets, and Raptor™ grip, shooting the Phenom™ XT delivers a phenomenal shooting experience for up and coming target archers at a phenomenal price.

345 FPS

Phenom™ XT Specifications

Brace Height:.....	7-5/8"	Mass Weight:.....	4.0 lbs.
Axle-to-Axle:.....	35-1/2"	Draw Length Range:.....	27-1/2 - 33"
ATA/IBO Speed:.....	345-338 fps @ 33"	Draw Weights (lbs.):.....	50, 60, 70
	315-307 fps @ 30"	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	75%	Shipped In:.....	29
		Cam:.....	DC



All Target Models are Matte Finish



GR ELECTRIC LIME PR IMPERIAL PURPLE RD SCARLET RED BL ADMIRAL BLUE PT PLATINUM CY COUNTRY® BK BLACK ONYX

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
PHENOM™ XT	1739DC	BK	27 1/2 TO 33"	50, 60, 70#
PHENOM™ XT	1739DC	CY	27 1/2 TO 33"	60, 70#
PHENOM™ XT	1739DC	GR, PR, RD, BL, PT	27 1/2 TO 33"	50, 60#

EXPERIENCE . PERFORMANCE .




2017 MAINLINE COMPOUND BOWS

BRUTE FORCE™ LITE



2017 new

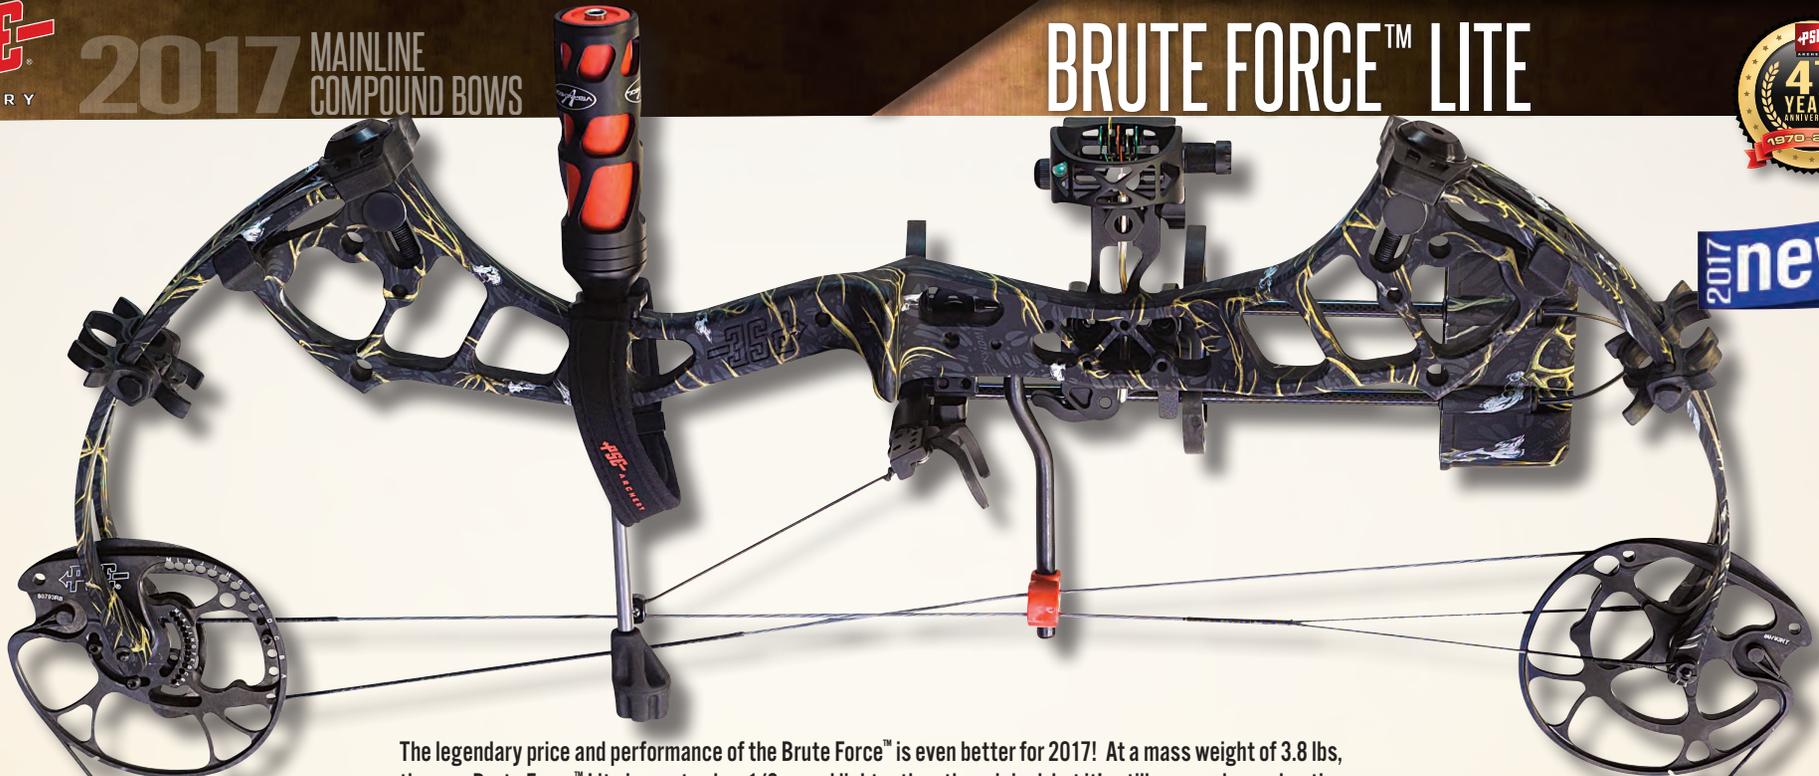

The legendary price and performance of the Brute Force™ is even better for 2017! At a mass weight of 3.8 lbs, the new Brute Force™ Lite is a not only a 1/2 pound lighter than the original, but it's still a powerhouse hunting bow that shoots at 332 fps with an 80% let-off. The Brute Force™ Lite also features PSE's Madness Hybrid Cam, delivering easy adjustment without sacrificing performance.

Brute Force® Lite Specifications

Brace Height:.....7"	Draw Length Range:.....25"- 31"
Axle-to-Axle:.....30-1/2"	Draw Weights (lbs.):.....50, 60, 70
ATA/IBO Speed:.....332-324 fps	Max. Limb Bolt Turns From Bottom:.....15 Turns
Letoff:.....80%	Shipped In:.....29
Mass Weight:.....3.8 lbs.	Cam.....MH

332 FPS



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
BRUTE FORCE™ LITE	1702MH	CY,BK,S2	25 TO 31"	50, 60, 70#
READY TO SHOOT	1712MH	CY,S2	25 TO 31"	50, 60, 70#
READY TO SHOOT (RTS) INCLUDES: AMP SIGHT, WHISKER BISCUIT REST, FX STABILIZER, RAVEN QUIVER, PSE NEOPRENE SLING, RED ALUMINUM PEEP SIGHT AND NOCK LOOP				
RTS PRO PACKAGE	1713MH	CY,S2	25 TO 31"	50, 60, 70#
READY TO SHOOT PRO (RTS) INCLUDES: AMP MICRO SIGHT, PHANTOM DROP-AWAY REST, SPIRE STABILIZER, RAVEN QUIVER, NEOPRENE SLING, RED ALUMINUM PEEP SIGHT AND NOCK LOOP				
FIELD READY	1722MH	CY	25 TO 31"	50, 60, 70#
FIELD READY (FR) INCLUDES: ALL READY TO SHOOT ACCESSORIES IN THE RTS PKG PLUS: TRUE-FIRE HURRICANE RELEASE, SUPREME BOWCASE AND A 4-PACK OF PSE X-WEAVE ARROWS				





2017 MAINLINE COMPOUND BOWS

INFINITY®



2017 new



One bow...infinite possibilities! The 2017 PSE Infinity® is the first high performance single cam bow made for almost everyone. With a 7" brace height, a 30" Axle to Axle, a 24.5 to 30.5 draw length range and 15 limb bolt turns for maximum weight adjustment, the Infinity® offers an amazing range of settings and incredibly smooth performance, making it the perfect bow for adults and growing teens. The PSE Infinity® is also a hard-hitter, shooting up to 325 fps with a smooth draw and an 80% let-off thanks to our all new Infinity® One Cam.

Infinity® Specifications

Brace Height:.....7"	Draw Length Range:.....24-1/2 - 30-1/2"
Axle-to-Axle:.....30"	Draw Weights (lbs.):.....50, 60, 70
ATA/IBO Speed:.....325-317 fps	Max. Limb Bolt Turns From Bottom:.....15 Turns
Letoff:.....80%	Shipped In:.....29
Mass Weight:.....3.8 lbs.	Cam.....IF

325 FPS

LIVEWIRE
BOW STRINGS & CABLES

PSE skullworks 2
BREAK-UP
COUNTRY
MOSSY OAK

HANDCRAFTED IN THE
USA

INFINITY MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
READY TO SHOOT	1733IF	CY,S2	24-1/2 TO 30-1/2"	50, 60, 70#
FIELD READY	1743IF	CY	24-1/2 TO 30-1/2"	50, 60, 70#

READY TO SHOOT (RTS) INCLUDES: AMP SIGHT, WHISKER BISCUIT REST, SPIRE STABILIZER, RAVEN QUIVER, PSE NEOPRENE SLING, MONGOOSE PEEP SIGHT AND NOCK LOOP
FIELD READY (FR) INCLUDES: ALL READY TO SHOOT ACCESSORIES ABOVE PLUS: TRUE-FIRE HURRICANE RELEASE, SUPREME BOWCASE AND A 4-PACK OF PSE X-WEAVE ARROWS





2017 MAINLINE COMPOUND BOWS

STINGER™ X



The PSE Stinger™ X took the compound bow world by storm, and for 2017 this bow is still the most accessible and affordable bow on the market! Featuring high-performance X-Tech™ split limbs and the highly-adjustable SX cam, shooting the Stinger™ X means having a bow that's lighter, faster, and that delivers a smooth shot and legendary reliability at an unforgettable price.

Stinger™ X Specifications

Brace Height:.....	7-1/8"	Draw Length Range:.....	21"- 30"
Axle-to-Axle:.....	32-1/2"	Draw Weights (lbs.):.....	50, 60, 70
ATA/IBO Speed:.....	316-308 fps	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	75%	Shipped In:.....	29"
Mass Weight:.....	3.5 lbs.	Cam.....	SX

316 FPS



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
STINGER X	1504SX	CY, BK, S2	21 TO 30"	50, 60, 70#
READY TO SHOOT	1514SX	CY, S2, BK, RD, BL, DT	21 TO 30"	50, 60, 70#
INCLUDES: GEMINI SIGHT, WHISKER BISCUIT REST, FX STABILIZER, HUNTER LT QUIVER, MONGOOSE PEEP SIGHT AND NOCK LOOP				
RTS PRO PACKAGE	1517SX	CY	21 TO 30"	50, 60, 70#
AMP MICRO SIGHT, PHANTOM DROP-AWAY REST, SPIRE STABILIZER, RAVEN QUIVER, NEOPRENE SLING, MONGOOSE PEEP SIGHT AND NOCK LOOP				
FIELD READY	1524SX	CY	21 TO 30"	50, 60, 70#
ALL READY TO SHOOT ACCESSORIES IN THE RTS PKG PLUS: TRUE-FIRE HURRICANE RELEASE, SUPREME BOWCASE AND A 4-PACK OF PSE X-WEAVE ARROWS				



Note: Stinger X "BOW ONLY" models are in limited quantities in Red, Blue and Desert Tan Skullworks 2



2017 MAINLINE COMPOUND BOWS

STINGER™ X STILETTO



MG
Muddy Girl® Reduced

The PSE Stinger X Stiletto™ shows the world just how amazing an affordable, women's bow can be, and now it's back and better than ever for 2017! Featuring a special finish in either Purple or Muddy Girl® Reduced. The draw weight range has been tailored for the lady hunter. Plus the Stinger X Stiletto™ boasts high-performance X-Tech™ split limbs and the highly-adjustable SX cam. Shooting the Stinger X Stiletto™ means having a bow that's lighter and faster, and that delivers a smooth shot and legendary reliability at an unforgettable price

Stinger™ X Stiletto Specifications

Brace Height:.....	7-1/8"	Draw Length Range:.....	21 - 30"
Axle-to-Axle:.....	32-1/2"	Draw Weights (lbs.):.....	40, 50
ATA/IBO Speed:.....	316-308 fps	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	75%	Shipped In:.....	29"
Mass Weight:.....	3.5 lbs.	Cam.....	SX

316 FPS

Muddy Girl
CAMOUFLAGE



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
STINGER X STILETTO	1504SX	PR	21 TO 30"	40, 50#
READY TO SHOOT	1514SX	PR (STANDARD RTS)	21 TO 30"	40, 50#
INCLUDES: GEMINI SIGHT, WHISKER BISCUIT REST, FX STABILIZER, HUNTER LT QUIVER, MONGOOSE PEEP SIGHT AND NOCK LOOP				
RTS PRO PACKAGE	1517SX	MG (PRO RTS)	21 TO 30"	40, 50#
AMP MICRO SIGHT, PHANTOM DROP-AWAY REST, SPIRE STABILIZER, RAVEN QUIVER, NEOPRENE SLING, MONGOOSE PEEP SIGHT AND NOCK LOOP				



PR
Purple



2017 MAINLINE COMPOUND BOWS

FEVER™



Help your young hunter catch the fever of bowhunting with the 2017 PSE Fever™! With PSE's split limbs and advanced cam technology, this bow shoots at a speedy 304 fps. It is also highly adjustable for growing hunters, going from 11" to 29" in draw length. The Fever™ easily switches from constant peak weight to grow-with-you adjustments without the need for a bow press!



Fever™ Specifications

Brace Height:.....	6-3/8"	Draw Length Range:.....	11 - 29"
Axle-to-Axle:.....	32"	Draw Weights (lbs.):.....	29, 40, 50, 60
ATA/IBO Speed:.....	304-296 fps @29"	Max. Limb Bolt Turns From Bottom:.....	13 Turns
Letoff:.....	70%	Shipped In:.....	25
Mass Weight:.....	3.4 lbs.	Cam.....	VS

304 FPS



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
FEVER™	1405VS	CY, S2, BK, PR	11 TO 29"	29, 40, 50, 60#
READY TO SHOOT	1415VS	CY, S2, BK, PR	11 TO 29"	29, 40, 50, 60#

READY TO SHOOT (RTS) INCLUDES: GEMINI SIGHT, WHISKER BISCUIT REST, SHADOW QUIVER, WHEEL PEEP SIGHT AND NOCK SET




EXPERIENCE . PERFORMANCE .



2017 MAINLINE COMPOUND BOWS

MINI BURNER™

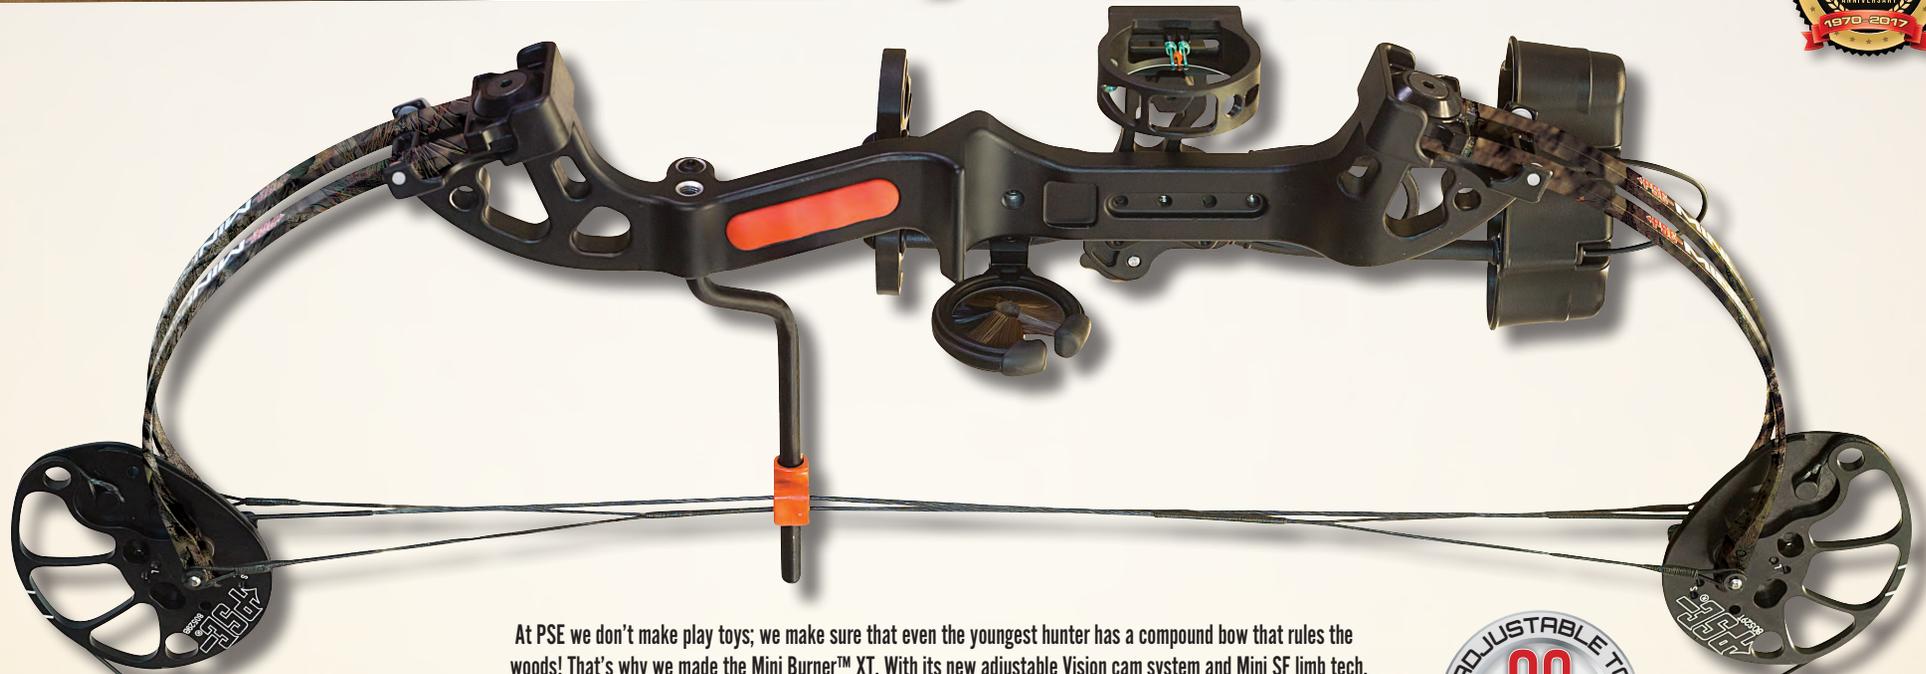

At PSE we don't make play toys; we make sure that even the youngest hunter has a compound bow that rules the woods! That's why we made the Mini Burner™ XT. With its new adjustable Vision cam system and Mini SF limb tech, this bow is designed to grow with your young hunter. The Mini Burner™ XT easily switches from constant peak weight to grow-with-you adjustments without the need for a bow press!



Mini Burner™ Specifications

Brace Height:.....	7-1/4"	Draw Length Range:.....	11" to 28"
Axle-to-Axle:.....	26-1/2"	Draw Weights (lbs.):.....	20, 29, 40, 50
ATA/IBO Speed:.....	280-272 fps @28"	Max. Limb Bolt Turns From Bottom:.....	8 Turns
Letoff:.....	70%	Shipped In:.....	25"
Mass Weight:.....	2.5 lbs.	Cam.....	VS

280 FPS



MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
MINI BURNER™	1602VS	CY, S2	11 TO 28"	20, 29, 40, 50#
READY TO SHOOT	1612VS	CY, S2	11 TO 28"	20, 29, 40, 50#
MINI BURNER™	1602VS	PR	11 TO 28"	20, 29, 40#
READY TO SHOOT	1612VS	PR	11 TO 28"	20, 29, 40#

READY TO SHOOT (RTS) INCLUDES: GEMINI SIGHT, WHISKER BISCUIT REST, HUNTER LITE QUIVER, WHEEL PEEP SIGHT AND NOCK SET






2017 MAINLINE COMPOUND BOWS

DISCOVERY™ 2



2017 new FEATURES

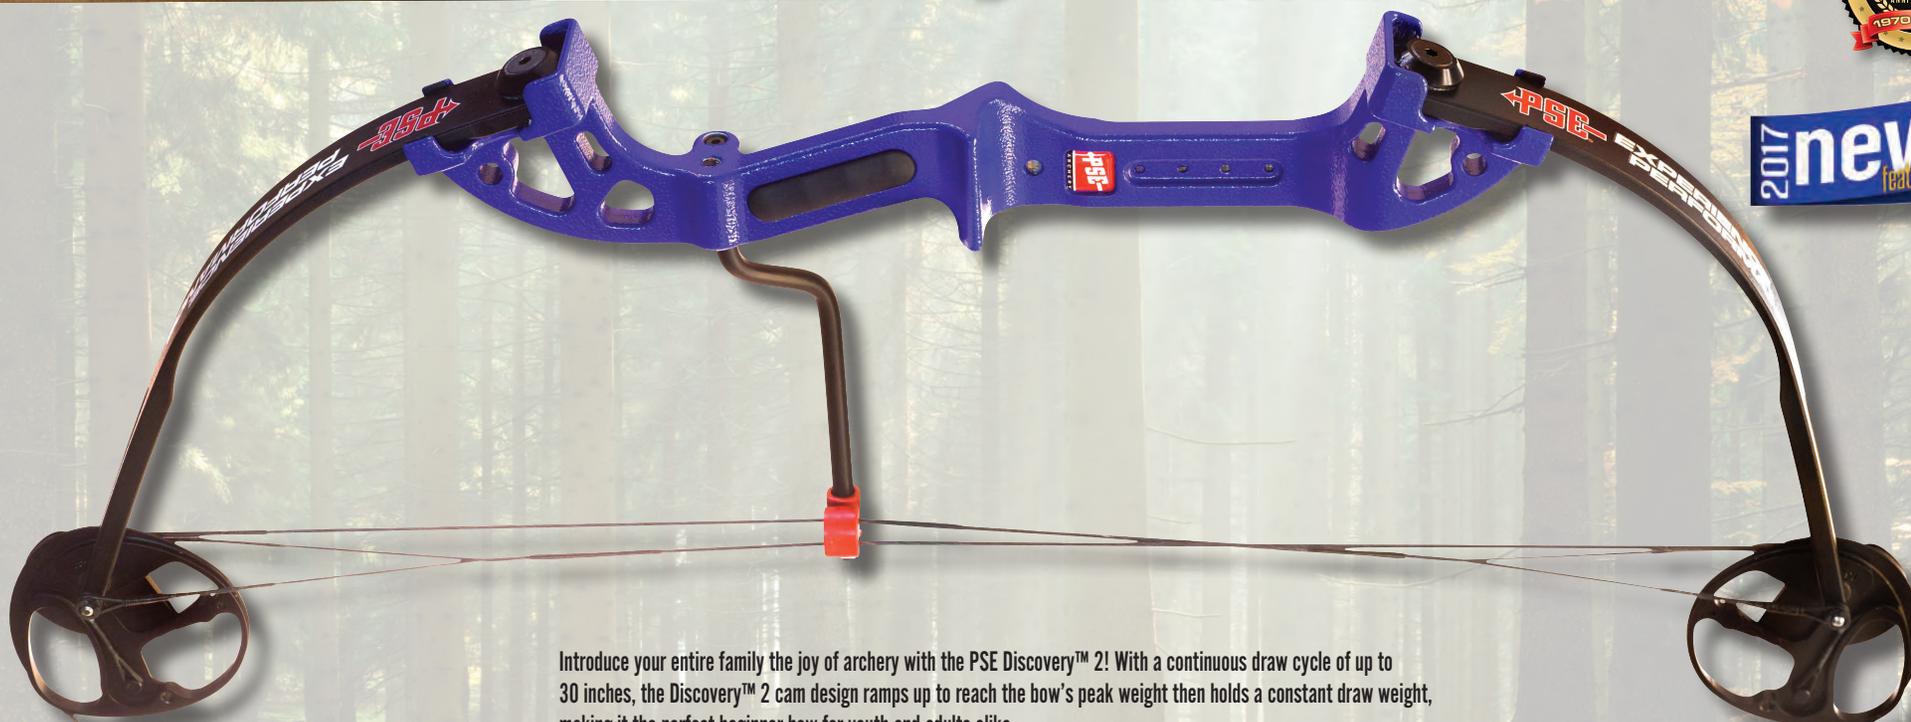

Introduce your entire family the joy of archery with the PSE Discovery™ 2! With a continuous draw cycle of up to 30 inches, the Discovery™ 2 cam design ramps up to reach the bow's peak weight then holds a constant draw weight, making it the perfect beginner bow for youth and adults alike.


Discovery™ 2 Specifications

Brace Height:.....6-1/2"
 Axle-to-Axle:.....31-1/2"
 Mass Weight:.....2.7 lbs.
 Draw Length Range:.....Up to 30"
 Peak Weights (lbs.):.....20, 29
 Cam.....BZ

- CAMPS
- SCOUTS
- 4-H
- SCHOOLS
- FAMILY FUN



DISCOVERY™ 2 DRAW PROFILE

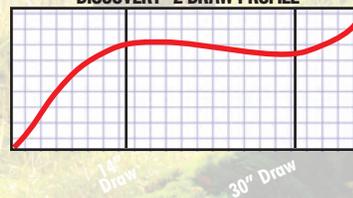

MODEL	PART #	FINISH/COLOR	DRAW LENGTH	PEAK WEIGHT
DISCOVERY™ 2	1704BZ	RD, BL	UP TO 30"	20, 29#



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE STINGER™ X DRAW AND WEIGHT SETTINGS

INNER-CAM	40# PEAK						50# PEAK						60# PEAK						70# PEAK					
	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING		
	& STOP	DRAW	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT
SETTINGS	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off	LENGTH	at Bottom	12 turns off
A	30	40	28	29 1/2	36 1/2	25 1/2	30	50	35	29 1/2	45 1/2	31 3/4	30	60	42	29 1/2	54 1/2	38	30	70	49	29 1/2	63 1/2	44 1/4
B	29 1/2	40	28	29	36	25 1/4	29 1/2	50	35	29	45	31 1/2	29 1/2	60	42	29	54	37 3/4	29 1/2	70	49	29	63	44
C	29	40	28	28 1/2	35 1/2	25	29	50	35	28 1/2	44 1/2	31 1/4	29	60	42	28 1/2	53 1/2	37 1/2	29	70	49	28 1/2	62 1/2	43 3/4
D	28 1/2	40	28	28	35 1/2	24 1/2	28 1/2	50	35	28	44 1/4	30 3/4	28 1/2	60	42	28	53	37	28 1/2	70	49	28	61 3/4	43 1/4
E	28	40	28	27 1/2	35	24 1/2	28	50	35	27 1/2	43 3/4	30 1/2	28	60	42	27 1/2	52 1/2	36 1/2	28	70	49	27 1/2	61 1/4	42 1/2
F	27 1/2	40	28	27	34 1/2	24	27 1/2	50	35	27	43 1/4	30	27 1/2	60	42	27	52	36	27 1/2	70	49	27	60 3/4	42
G	27	40	28	26 1/2	34 1/2	23 1/2	27	50	35	26 1/2	43	29 1/2	27	60	42	26 1/2	51 1/2	35 1/2	27	70	49	26 1/2	60	41 1/2
H	26 1/2	40	28	26	34	23 1/2	26 1/2	50	35	26	42 1/2	29 1/4	26 1/2	60	42	26	51	35	26 1/2	70	49	26	59 1/2	40 3/4
I	26	40	28	25 1/2	33 1/2	23	26	50	35	25 1/2	42	28 3/4	26	60	42	25 1/2	50 1/2	34 1/2	26	70	49	25 1/2	59	40 1/4
J	25 1/2	40	28	24 7/8	33 1/4	22 1/2	25 1/2	50	35	24 7/8	41 1/2	28 1/4	25 1/2	60	42	24 7/8	49 3/4	34	25 1/2	70	49	24 7/8	58	39 3/4
K	25	40	28	24 1/4	32 1/2	22 1/2	25	50	35	24 1/4	40 3/4	28	25	60	42	24 1/4	49	33 1/2	25	70	49	24 1/4	57 1/4	39
L	24 1/2	40	28	23 5/8	32	21 3/4	24 1/2	50	35	23 5/8	40	27 1/4	24 1/2	60	42	23 5/8	48	32 3/4	24 1/2	70	49	23 5/8	56	38 1/4
M	24	40	28	23	31	21 1/4	24	50	35	23	38 3/4	26 1/2	24	60	42	23	46 1/2	31 3/4	24	70	49	23	54 1/4	37
N	23 1/2	40	28	22 3/8	30	20 1/2	23 1/2	50	35	22 3/8	37 1/2	25 1/2	23 1/2	60	42	22 3/8	45	30 1/2	23 1/2	70	49	22 3/8	52 1/2	35 1/2
O	23	40	28	21 3/4	28 1/2	19 1/2	23	50	35	21 3/4	35 3/4	24 1/2	23	60	42	21 3/4	43	29 1/4	23	70	49	21 3/4	50 1/4	34 1/4
P	22 1/2	40	28	21	27 1/2	18 1/2	22 1/2	50	35	21	34 1/4	23	22 1/2	60	42	21	41	27 1/2	22 1/2	70	49	21	47 3/4	32



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE FEVER™ DRAW AND WEIGHT SETTINGS- 60 LB. PEAK

	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)
INNER-CAM												
A-L	29	60	40	28 3/4	54	37 1/4	28	52	36	27 3/4	49 1/4	33 1/2
B-L	28 3/4	60	40	28 1/2	54	37 1/4	27 1/2	52	36	27 1/4	49 1/4	33 1/2
C-L	27 1/2	60	40	27 1/4	54	37 1/4	26 1/2	52	36	26	49 1/4	33 1/2
D-L	27	60	40	26 3/4	54	37 1/4	26	52	36	25 1/2	49 1/4	33 1/2
E-L	25 3/4	60	40	25 1/2	54	37 1/4	24 3/4	52	36	24 1/2	49 1/4	33 1/2
F-L	25 1/4	60	40	25	54	37 1/4	24 1/2	52	36	24	48	32 1/2
G-L	24 1/4	60	40	24	54	37 1/4	23	52	36	22 3/4	46 3/4	31 1/4
H-L	24	60	40	23 1/4	54	37 1/4	22 1/2	52	35	22 1/4	45 1/2	31 1/4
I-L	22 1/2	60	40	22	54	36	21 1/4	48	33	21	43 1/4	28 3/4
J-L	21 3/4	60	40	21 1/2	52 3/4	34 3/4	20 1/4	48	31	20	42	28 3/4
A-S	21 1/4	60	40	21	51 1/2	33 1/2	19 3/4	47	31	19 1/2	40 3/4	31 1/4
B-S	20	60	40	19 1/2	49 1/4	32 1/2	18 1/2	47	31	18	37 1/4	25 1/4
C-S	19 1/4	60	40	18 3/4	48	31 1/4	18	47	31	17 1/2	34 3/4	22 3/4
D-S	18 1/2	60	40	17 1/2	43 1/4	28 3/4	17	47	31	16	30	20 1/2
E-S	18	60	40	17	40 3/4	26 1/2	16 1/2	47	31	15 1/4	27 1/2	18
F-S	17 3/4	60	40	16	36	24	16 1/4	47	31	14	22 3/4	14 1/2
G-S	17 1/2	60	40	15 1/2	33 1/2	21 1/2	16	47	31	13 1/2	20 1/2	13 1/4
H-S	17 1/4	60	40	14 1/2	28 3/4	19 1/4	16	47	31	12 1/2	15 1/2	10 3/4
I-S	17 1/4	60	40	14 1/4	28 3/4	19 1/4	15 3/4	47	31	12	13 1/4	9 1/2
J-S	17	60	40	13 1/2	28 3/4	19 1/4	15 1/2	47	31	11	13 1/4	8 1/2



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE FEVER™ DRAW AND WEIGHT SETTINGS- 50 LB. PEAK

	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)
INNER-CAM												
A-L	29	50	33	28 3/4	45	31	28	43	30	27 3/4	41	28
B-L	28 3/4	50	33	28 1/2	45	31	27 1/2	43	30	27 1/4	41	28
C-L	27 1/2	50	33	27 1/4	45	31	26 1/2	43	30	26	41	28
D-L	27	50	33	26 3/4	45	31	26	43	30	25 1/2	41	28
E-L	25 3/4	50	33	25 1/2	45	31	24 3/4	43	30	24 1/2	41	28
F-L	25 1/4	50	33	25	45	31	24 1/2	43	30	24	40	27
G-L	24 1/4	50	33	24	45	31	23	43	30	22 3/4	39	26
H-L	24	50	33	23 1/4	45	31	22 1/2	43	29	22 1/4	38	26
I-L	22 1/2	50	33	22	45	30	21 1/4	40	27	21	36	24
J-L	21 3/4	50	33	21 1/2	44	29	20 1/4	40	26	20	35	24
A-S	21 1/4	50	33	21	43	28	19 3/4	39	26	19 1/2	34	26
B-S	20	50	33	19 1/2	41	27	18 1/2	39	26	18	31	21
C-S	19 1/4	50	33	18 3/4	40	26	18	39	26	17 1/2	29	19
D-S	18 1/2	50	33	17 1/2	36	24	17	39	26	16	25	17
E-S	18	50	33	17	34	22	16 1/2	39	26	15 1/4	23	15
F-S	17 3/4	50	33	16	30	20	16 1/4	39	26	14	19	12
G-S	17 1/2	50	33	15 1/2	28	18	16	39	26	13 1/2	17	11
H-S	17 1/4	50	33	14 1/2	24	16	16	39	26	12 1/2	13	9
I-S	17 1/4	50	33	14 1/4	24	16	15 3/4	39	26	12	11	8
J-S	17	50	33	13 1/2	24	16	15 1/2	39	26	11	11	7



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE FEVER™ DRAW AND WEIGHT SETTINGS- 40 LB. PEAK

	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)
INNER-CAM												
A-L	29	40	26	28 3/4	36	24 3/4	28	35	24	27 3/4	32 3/4	22 1/2
B-L	28 3/4	40	26	28 1/2	36	24 3/4	27 1/2	35	24	27 1/4	32 3/4	22 1/2
C-L	27 1/2	40	26	27 1/4	36	24 3/4	26 1/2	35	24	26	32 3/4	22 1/2
D-L	27	40	26	26 3/4	36	24 3/4	26	35	24	25 1/2	32 3/4	22 1/2
E-L	25 3/4	40	26	25 1/2	36	24 3/4	24 3/4	35	24	24 1/2	32 3/4	22 1/2
F-L	25 1/4	40	26	25	36	24 3/4	24 1/2	35	24	24	32	21 1/2
G-L	24 1/4	40	26	24	36	24 3/4	23	35	24	22 3/4	31 1/4	20 3/4
H-L	24	40	26	23 1/4	36	24 3/4	22 1/2	35	23	22 1/4	30 1/2	20 3/4
I-L	22 1/2	40	26	22	36	24	21 1/4	32	22	21	28 3/4	19 1/4
J-L	21 3/4	40	26	21 1/2	35 1/4	23 1/4	20 1/4	32	21	20	28	19 1/4
A-S	21 1/4	40	26	21	34 1/2	22 1/2	19 3/4	31	21	19 1/2	27 1/4	20 3/4
B-S	20	40	26	19 1/2	32 3/4	21 1/2	18 1/2	31	21	18	24 3/4	16 3/4
C-S	19 1/4	40	26	18 3/4	32	20 3/4	18	31	21	17 1/2	23 1/4	15 1/4
D-S	18 1/2	40	26	17 1/2	28 3/4	19 1/4	17	31	21	16	20	13 1/2
E-S	18	40	26	17	27 1/4	17 1/2	16 1/2	31	21	15 1/4	18 1/2	12
F-S	17 3/4	40	26	16	24	16	16 1/4	31	21	14	15 1/4	9 1/2
G-S	17 1/2	40	26	15 1/2	22 1/2	14 1/2	16	31	21	13 1/2	13 1/2	8 3/4
H-S	17 1/4	40	26	14 1/2	19 1/4	12 3/4	16	31	21	12 1/2	10 1/2	7 1/4
I-S	17 1/4	40	26	14 1/4	19 1/4	12 3/4	15 3/4	31	21	12	8 3/4	6 1/2
J-S	17	40	26	13 1/2	19 1/4	12 3/4	15 1/2	31	21	11	8 3/4	5 1/2



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE FEVER™ DRAW AND WEIGHT SETTINGS- 29 LB. PEAK

	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (12 turns off)
INNER-CAM												
A-L	29	29	19	28 3/4	26	18	28	25	18	27 3/4	23 3/4	16 1/4
B-L	28 3/4	29	19	28 1/2	26	18	27 1/2	25	18	27 1/4	23 3/4	16 1/4
C-L	27 1/2	29	19	27 1/4	26	18	26 1/2	25	18	26	23 3/4	16 1/4
D-L	27	29	19	26 3/4	26	18	26	25	18	25 1/2	23 3/4	16 1/4
E-L	25 3/4	29	19	25 1/2	26	18	24 3/4	25	18	24 1/2	23 3/4	16 1/4
F-L	25 1/4	29	19	25	26	18	24 1/2	25	18	24	23 1/4	15 3/4
G-L	24 1/4	29	19	24	26	18	23	25	18	22 3/4	22 1/2	15
H-L	24	29	19	23 1/4	26	18	22 1/2	25	17	22 1/4	22	15
I-L	22 1/2	29	19	22	26	17 1/2	21 1/4	23	16	21	21	14
J-L	21 3/4	29	19	21 1/2	25 1/2	16 3/4	20 1/4	23	15	20	20 1/4	14
A-S	21 1/4	29	19	21	25	16 1/4	19 3/4	23	15	19 1/2	19 3/4	15
B-S	20	29	19	19 1/2	23 3/4	15 3/4	18 1/2	23	15	18	18	12 1/4
C-S	19 1/4	29	19	18 3/4	23 1/4	15	18	23	15	17 1/2	16 3/4	11
D-S	18 1/2	29	19	17 1/2	21	14	17	23	15	16	14 1/2	9 3/4
E-S	18	29	19	17	19 3/4	12 3/4	16 1/2	23	15	15 1/4	13 1/4	8 3/4
F-S	17 3/4	29	19	16	17 1/2	11 1/2	16 1/4	23	15	14	11	7
G-S	17 1/2	29	19	15 1/2	16 1/4	10 1/2	16	23	15	13 1/2	9 3/4	6 1/2
H-S	17 1/4	29	19	14 1/2	14	9 1/4	16	23	15	12 1/2	7 1/2	5 1/4
I-S	17 1/4	29	19	14 1/4	14	9 1/4	15 3/4	23	15	12	6 1/2	4 3/4
J-S	17	29	19	13 1/2	14	9 1/4	15 1/2	23	15	11	6 1/2	4



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE MINI BURNER™ XT DRAW AND WEIGHT SETTINGS- 50 LB. PEAK

	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT
INNER CAM	LENGTH	(at Bottom)	(6 turns off)	LENGTH	(at Bottom)	(6 turns off)	LENGTH	(at Bottom)	(6 turns off)	LENGTH	(at Bottom)	(6 turns off)
A-L	28-1/4	50	37	28	45	33	27 1/2	43	33	27 1/4	40	30
B-L	28	50	37	27 3/4	45	33	27 1/4	43	33	27	40	30
C-L	27	50	37	26 3/4	45	33	26	43	33	25 3/4	40	30
D-L	26-1/2	50	35	26 1/4	45	32	25 3/4	43	32	25 1/2	39	30
E-L	25-1/4	50	35	25	45	32	24 1/2	43	32	24	39	29
F-L	25	50	35	24 3/4	45	32	24	43	32	23 3/4	39	29
G-L	23-3/4	50	35	23 1/2	45	32	22 3/4	42	32	22 1/2	38	29
H-L	23-1/2	50	35	23 1/4	45	32	22 1/2	42	31	22 1/2	38	28
I-L	22-1/2	50	35	22	45	32	21 1/4	40	29	21	36	27
J-L	21-1/2	50	35	21	45	32	20 3/4	40	29	20 1/2	36	26
A-S	21	50	35	20 3/4	44	31	20	40	29	19 3/4	34	26
B-S	20	50	34	19 1/2	40	30	18 3/4	40	29	18 1/2	32	24
C-S	19-1/4	50	34	19	40	30	18	40	29	17 3/4	29	22
D-S	18-1/4	50	34	17 3/4	37	27	17 1/4	40	29	16 1/2	27	19
E-S	18	50	34	17 1/4	36	25	16 3/4	40	29	15 1/2	25	17
F-S	17-3/4	50	34	16	30	23	16 1/2	40	29	14 3/4	21	15
G-S	17-1/2	50	34	15 3/4	29	22	16 1/4	40	29	14	19	11
H-S	17-1/4	50	34	15	26	20	16	40	29	13	16	11
I-S	17	50	34	14 3/4	25	19	15 3/4	40	28	12 3/4	14	10
J-S	16-3/4	50	34	14	25	19	15 1/2	40	28	11 1/2	14	9



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE MINI BURNER™ XT DRAW AND WEIGHT SETTINGS- 40 LB. PEAK

	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT	DRAW	DRAW WEIGHT	DRAW WEIGHT
INNER CAM	LENGTH	(at Bottom)	(6 turns off)	LENGTH	(at Bottom)	(6 turns off)	LENGTH	(at Bottom)	(6 turns off)	LENGTH	(at Bottom)	(6 turns off)
A-L	28-1/4	40	30	28	36	26 1/2	27 1/2	35	27	27 1/4	32	24
B-L	28	40	30	27 3/4	36	26 1/2	27 1/4	35	27	27	32	24
C-L	27	40	30	26 3/4	36	26 1/2	26	35	27	25 3/4	32	24
D-L	26-1/2	40	28	26 1/4	36	25 1/2	25 3/4	35	26	25 1/2	31 1/4	24
E-L	25-1/4	40	28	25	36	25 1/2	24 1/2	35	26	24	31 1/4	23 1/4
F-L	25	40	28	24 3/4	36	25 1/2	24	35	26	23 3/4	31 1/4	23 1/4
G-L	23-3/4	40	28	23 1/2	36	25 1/2	22 3/4	34	26	22 1/2	30 1/2	23 1/4
H-L	23-1/2	40	28	23 1/4	36	25 1/2	22 1/2	34	25	22 1/2	30 1/2	22 1/2
I-L	22-1/2	40	28	22	36	25 1/2	21 1/4	32	23	21	28 3/4	21 1/2
J-L	21-1/2	40	28	21	36	25 1/2	20 3/4	32	23	20 1/2	28 3/4	20 3/4
A-S	21	40	28	20 3/4	35 1/4	24 3/4	20	32	23	19 3/4	27 1/4	20 3/4
B-S	20	40	27	19 1/2	32	24	18 3/4	32	23	18 1/2	25 1/2	19 1/4
C-S	19-1/4	40	27	19	32	24	18	32	23	17 3/4	23 1/4	17 1/2
D-S	18-1/4	40	27	17 3/4	29 1/2	21 1/2	17 1/4	32	23	16 1/2	21 1/2	15 1/4
E-S	18	40	27	17 1/4	28 3/4	20	16 3/4	32	23	15 1/2	20	13 1/2
F-S	17-3/4	40	27	16	24	18 1/2	16 1/2	32	23	14 3/4	16 3/4	12
G-S	17-1/2	40	27	15 3/4	23 1/4	17 1/2	16 1/4	32	23	14	15 1/4	8 3/4
H-S	17-1/4	40	27	15	20 3/4	16	16	32	23	13	12 3/4	8 3/4
I-S	17	40	27	14 3/4	20	15 1/4	15 3/4	32	23	12 3/4	11 1/4	8
J-S	16-3/4	40	27	14	20	15 1/4	15 1/2	32	23	11 1/2	11 1/4	7 1/4



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE MINI BURNER™ XT DRAW AND WEIGHT SETTINGS- 29 LB. PEAK

INNER CAM	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)
A-L	28-1/4	29	21	28	26	19 1/4	27 1/2	25	19	27 1/4	23 1/4	17 1/2
B-L	28	29	21	27 3/4	26	19 1/4	27 1/4	25	19	27	23 1/4	17 1/2
C-L	27	29	21	26 3/4	26	19 1/4	26	25	19	25 3/4	23 1/4	17 1/2
D-L	26-1/2	29	20	26 1/4	26	18 1/2	25 3/4	25	19	25 1/2	22 1/2	17 1/2
E-L	25-1/4	29	20	25	26	18 1/2	24 1/2	25	19	24	22 1/2	16 3/4
F-L	25	29	20	24 3/4	26	18 1/2	24	25	19	23 3/4	22 1/2	16 3/4
G-L	23-3/4	29	20	23 1/2	26	18 1/2	22 3/4	24	19	22 1/2	22	16 3/4
H-L	23-1/2	29	20	23 1/4	26	18 1/2	22 1/2	24	18	22 1/2	22	16 1/4
I-L	22-1/2	29	20	22	26	18 1/2	21 1/4	23	17	21	21	15 3/4
J-L	21-1/2	29	20	21	26	18 1/2	20 3/4	23	17	20 1/2	21	15
A-S	21	29	20	20 3/4	25 1/2	18	20	23	17	19 3/4	19 3/4	15
B-S	20	29	20	19 1/2	23 1/4	17 1/2	18 3/4	23	17	18 1/2	18 1/2	14
C-S	19-1/4	29	20	19	23 1/4	17 1/2	18	23	17	17 3/4	16 3/4	12 3/4
D-S	18-1/4	29	20	17 3/4	21 1/2	15 3/4	17 1/4	23	17	16 1/2	15 3/4	11
E-S	18	29	20	17 1/4	21	14 1/2	16 3/4	23	17	15 1/2	14 1/2	9 3/4
F-S	17-3/4	29	20	16	17 1/2	13 1/4	16 1/2	23	17	14 3/4	12 1/4	8 3/4
G-S	17-1/2	29	20	15 3/4	16 3/4	12 3/4	16 1/4	23	17	14	11	6 1/2
H-S	17-1/4	29	20	15	15	11 1/2	16	23	17	13	9 1/4	6 1/2
I-S	17	29	20	14 3/4	14 1/2	11	15 3/4	23	16	12 3/4	8	5 3/4
J-S	16-3/4	29	20	14	14 1/2	11	15 1/2	23	16	11 1/2	8	5 1/4



2017 MAINLINE COMPOUND BOWS

BOW DATA SPECIFICATIONS



2016 PSE MINI BURNER™ XT DRAW AND WEIGHT SETTINGS- 20 LB. PEAK

INNER CAM	"PERFORMANCE" CABLE SETTING			"GROW WITH YOU" CABLE SETTING			"PERFORMANCE" CABLE SETTING SHORT POST			"GROW WITH YOU" CABLE SETTING SHORT POST		
	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)	DRAW LENGTH	DRAW WEIGHT (at Bottom)	DRAW WEIGHT (6 turns off)
A-L	28-1/4	20	15	28	18	13 1/4	27 1/2	17	13	27 1/4	16	12
B-L	28	20	15	27 3/4	18	13 1/4	27 1/4	17	13	27	16	12
C-L	27	20	15	26 3/4	18	13 1/4	26	17	13	25 3/4	16	12
D-L	26-1/2	20	14	26 1/4	18	12 3/4	25 3/4	17	13	25 1/2	15 1/2	12
E-L	25-1/4	20	14	25	18	12 3/4	24 1/2	17	13	24	15 1/2	11 1/2
F-L	25	20	14	24 3/4	18	12 3/4	24	17	13	23 3/4	15 1/2	11 1/2
G-L	23-3/4	20	14	23 1/2	18	12 3/4	22 3/4	17	13	22 1/2	15 1/4	11 1/2
H-L	23-1/2	20	14	23 1/4	18	12 3/4	22 1/2	17	13	22 1/2	15 1/4	11 1/4
I-L	22-1/2	20	14	22	18	12 3/4	21 1/4	16	12	21	14 1/2	10 3/4
J-L	21-1/2	20	14	21	18	12 3/4	20 3/4	16	12	20 1/2	14 1/2	10 1/2
A-S	21	20	14	20 3/4	17 1/2	12 1/2	20	16	12	19 3/4	13 1/2	10 1/2
B-S	20	20	14	19 1/2	16	12	18 3/4	16	12	18 1/2	12 3/4	9 1/2
C-S	19-1/4	20	14	19	16	12	18	16	12	17 3/4	11 1/2	8 3/4
D-S	18-1/4	20	14	17 3/4	14 3/4	10 3/4	17 1/4	16	12	16 1/2	10 3/4	7 1/2
E-S	18	20	14	17 1/4	14 1/2	10	16 3/4	16	12	15 1/2	10	6 3/4
F-S	17-3/4	20	14	16	12	9 1/4	16 1/2	16	12	14 3/4	8 1/2	6
G-S	17-1/2	20	14	15 3/4	11 1/2	8 3/4	16 1/4	16	12	14	7 1/2	4 1/2
H-S	17-1/4	20	14	15	10 1/2	8	16	16	12	13	6 1/2	4 1/2
I-S	17	20	14	14 3/4	10	7 1/2	15 3/4	16	11	12 3/4	5 1/2	4
J-S	16-3/4	20	14	14	10	7 1/2	15 1/2	16	11	11 1/2	5 1/2	3 1/2